

CORRECTED VERSION

(19) World Intellectual Property Organization  
International Bureau(43) International Publication Date  
19 July 2001 (19.07.2001)

PCT

(10) International Publication Number  
WO 01/052478 A3(51) International Patent Classification<sup>7</sup>: H04L 12/28

US

60/180,281 (CON)

(21) International Application Number: PCT/US01/00428

Filed on

4 February 2000 (04.02.2000)

(22) International Filing Date: 8 January 2001 (08.01.2001)

(71) Applicant (for all designated States except US): INVEN-  
SYS CONTROLS PLC [US/US]; 33 Commercial Street,  
Foxboro, MA 02035 (US).

(25) Filing Language: English

(26) Publication Language: English

(72) Inventors; and

(30) Priority Data:

60/174,829	7 January 2000 (07.01.2000)	US
60/176,005	14 January 2000 (14.01.2000)	US
60/180,281	4 February 2000 (04.02.2000)	US
09/755,203	8 January 2001 (08.01.2001)	US
09/755,202	8 January 2001 (08.01.2001)	US
09/755,194	8 January 2001 (08.01.2001)	US

(75) Inventors/Applicants (for US only): SHAROOD, John,


N. [US/US]; Invensys Controls, Suite 400, 2809 Emerywood Parkwood, Richmond, VA 23294 (US). TURNER, James, H. [US/US]; Invensys Controls, 1701 Byrd Avenue, Richmond, VA 23230-3011 (US). BAILEY, Graham [DE/DE]; Am Neuen Rheinhafen 4, 67346 Speyer (DE). HENDERSON, Bruce, H. [US/US]; Invensys Controls, Suite 400, 2809 Emerywood Parkwood, Richmond, VA 23294 (US). CARR, D., Mitchell [—/US]; 20755 Quiet Brook Place, Potomac Falls, VA 20165 (US). JOHNSON, Terri [US/US]; 15 Dorchester Court, Hawthorn Woods, IL 6007 (US). PEACHEY, David [US/US]; Invensys Controls, Suite 203, 2141 E. Broadway Road, Tempe, AZ 85282-1895 (US).

(63) Related by continuation (CON) or continuation-in-part (CIP) to earlier applications:

US	60/174,829 (CON)
Filed on	7 January 2000 (07.01.2000)
US	60/176,005 (CON)
Filed on	14 January 2000 (14.01.2000)

[Continued on next page]

(54) Title: BUILDING CONTROL.

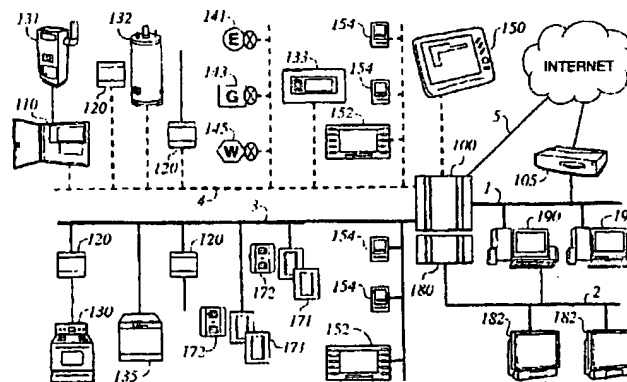

(57) Abstract: In one general aspect, a complete home and commercial automation system may accommodate existing appliances at a cost that is affordable to the average homeowner or small business. In addition, the automation system can be installed in a home or a building without substantial rewiring, expense, or invasiveness. The automation system allows control of all associated systems from a remote location using virtual controls that resemble the actual controls of the appliances. In addition, the virtual controls have a consistent appearance between most interfaces. As a result, a user can operate and monitor systems without having to be present on site and without having to learn how to operate new controls. The automation system also can monitor the use of all home appliances and provide this information to a monitoring facility or a service provider. As a result, the monitoring facility or the service provider can provide services to the user at a time when the service would be most beneficial to the user. In addition, by monitoring specific use of home appliances and user activities, companies can offer the user better service through the use of interactive coupons, warranties, improved maintenance, repair information, and interactive messaging.



(74) Agents: BODENDORF, Andrew, F.; Fish & Richardson P.C., 601 Thirteenth Street, N.W., Washington, DC 20005 et al. (US).

**Published:**

— with international search report

(81) Designated States (*national*): AE, AG, AI, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.

(88) Date of publication of the international search report:  
4 April 2002

(48) Date of publication of this corrected version:  
18 July 2002

(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

**(15) Information about Correction:**

see PCT Gazette No. 29/2002 of 18 July 2002, Section II

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

## BUILDING CONTROL

### TECHNICAL FIELD

This invention relates generally to building automation, and more particularly to a  
5 retrofit monitoring device for use in building automation.

### BACKGROUND

Building automation concepts have been known for some time. However, in  
general, these concepts have been limited to large industrial settings or to custom-  
10 designed systems for luxury homes because of the prohibitive cost associated with  
conventional automation systems. In addition, automation systems generally have been  
placed in new structures because of the substantial wiring necessary to implement these  
systems. Retrofitting automation systems in existing structures has been unpopular  
because, in general, the procedure is invasive and may require destruction of interior  
15 surfaces, substantial rewiring, significant expense, and inconvenience to the homeowner  
or tenant.

### SUMMARY

In one general aspect, a complete home and commercial automation system may  
20 accommodate existing appliances at a cost that is affordable to the average homeowner or  
small business. In addition, the automation system can be installed in a home or a  
building without substantial rewiring, expense, or invasiveness. The automation system  
allows control of all associated systems from a remote location using virtual controls that  
resemble the actual controls of the appliances. In addition, the virtual controls have a  
25 consistent appearance between most interfaces. As a result, a user can operate and  
monitor systems without having to be present on site and without having to learn how to  
operate new controls. The automation system also can monitor the use of all home  
appliances and provide this information to a monitoring facility or a service provider. As  
a result, the monitoring facility or the service provider can provide services to the user at  
30 a time when the service would be most beneficial to the user. In addition, by monitoring  
specific use of home appliances and user activities, companies can offer the user better  
service through the use of interactive coupons, warranties, improved maintenance, repair  
information, and interactive messaging.

In one general aspect, a device monitors an appliance that receives power from a source. The device includes a first coupler that couples the device to the power source. A second coupler couples the device to the appliance. A monitoring circuit is connected between the first coupler and the second coupler to monitor power supplied by the source to the appliance. A communications circuit also is provided. The monitoring circuit provides data based on the monitored power to the communications circuit, and the communications circuit outputs these data through the first coupler.

The communications circuit may include a receiver that receives a signal from the first coupler to control the monitoring circuit. The communications circuit also may include a transceiver that receives a signal from the first coupler to control the monitoring circuit and to transmit monitored power data. For example, the communications circuit may include a power line carrier transceiver and a power line driver.

The monitoring circuit may measure current drawn by the appliance, and may include a processor that determines an operating state of the appliance based on the measured current. The monitoring circuit also may include a memory for storing the measured current and periodically sending measured current data to the first coupler. The memory may store an electronic signature, and the processor may determine an operating state of the appliance based on the electronic signature.

A modem may be connected to the monitoring circuit and may transmit data based on the measured current. A radio frequency transmitter also may be connected to the monitoring circuit for transmitting data based on the measured current. A serial port connected to the monitoring circuit may be used to receive data about the appliance.

A battery may be included to supply power to the monitoring circuit when power is not received by the first coupler.

A switch may be connected to the first coupler. The switch can be opened in response to the control signal. When opened, power from the source may be inhibited from being supplied to the appliance.

The first coupler may include a pin for connection to a live line and a pin for connection to a neutral line. First and second power lines may connect the first and second couplers. The second coupler may include a first slot connected to the live pin through the first power line and a neutral slot connected to the second pin through the second power line.

In another general aspect, a system for monitoring an appliance that receives power from a source may include a power line connected to the source, a circuit

connected to the power line and the appliance, a circuit that monitors power supplied to the appliance, and a processor connected to the power line. The circuit sends signals to the processor through the power line. The signals are based on the power supplied to the appliance.

5       The circuit may include a first coupler coupling the circuit to the power line, a second coupler coupling the circuit to the appliance, a monitoring circuit connected between the first coupler and the second coupler to monitor power supplied by the source to the appliance, and a communications circuit connected to the monitoring circuit. The monitoring circuit may provide data based on the monitored power to the  
10       communications circuit.

      The circuit may be a plug having a live pin and a neutral pin and slots for receiving a live pin and a neutral pin from the appliance's plug. The live pin connects to a live line and the neutral pin connects to a neutral line.

      The system may include a connection to a service provider that monitors the  
15       appliance. The processor may be a control server that sends signals to the service provider about the operation of the appliance. The processor also may be a gateway.

      The processor may diagnose the signals to determine if an appliance needs servicing.

      The system may include a display. The processor may send a message to the display  
20       alerting a user when the appliance needs servicing.

      In another general aspect, a retrofit plug is adapted to be that receives by an appliance receiving power from a source. The retrofit plug includes a live pin, a neutral pin, a first line connected to the live pin, and a second line connected to the neutral pin. A first slot is connected the first line for receiving a live pin connected to the appliance. A  
25       second slot is connected to the second line for receiving a neutral pin connected to the appliance. A transformer monitors the first and second lines. A measurement circuit connected to the transformer measures current supplied to the appliance. A power line carrier transceiver encodes a power line carrier signal based on the measured current.

      In one general aspect, a wireless damper includes a register, a controller regulating  
30       the amount of air flow provided by the register, and a radio frequency communications circuit. The radio frequency communications circuit provides a signal to the controller to adjust the amount of air flow. A register regulation mechanism opens and closes the register in response to a signal from the controller to regulate air flow through the

damper. The register regulation mechanism can be a variable switch, which variably adjusts the amount of air flow through the damper and a magnetic latch.

A battery supplies power to the damper, the controller, the register regulation mechanism, and the radio frequency communications circuit. The controller may monitor  
5 a power level of the battery. To do so the controller may send a signal for transmission by the radio frequency communications circuit when the power level reaches a predetermined amount. The controller may open the register if the power level of the battery reaches the predetermined amount.

The damper may include a sensor for determining a condition at the damper. The  
10 controller may adjust the register regulation mechanism in response to the condition determined by the sensor. The controller receives the determined condition from the sensor and may send a signal with the determined condition to the radio frequency communications device for transmission of the determined condition signal. The condition sensed may be temperature.

15 The radio frequency communications circuit may be a radio frequency transceiver.

The controller may include a processor. The processor may send a signal to the radio frequency communications circuit identifying the damper. The processor also may determine if a signal received by the radio frequency communications circuit is addressed to the damper. The controller may include a memory for storing damper identification.  
20 The processor may determine if a signal is addressed to the damper using the stored damper identification.

In another general aspect, a wireless air flow control system may include a wireless damper including a battery, and a zone controller. The zone controller sends a signal to the wireless damper to control the amount of air flow through the damper.

25 The wireless air flow control system may include a display on which the zone controller displays a message identifying that the damper's battery power level is low or needs replacing.

The wireless air flow control system may include a user interface. The user interface generates a signal and the zone controller controls the damper in response to the  
30 user interface generated signal. The user interface can be a thermostat or a computer.

The wireless air flow control system also may include a control server. The control server controls the zone controller in coordination with other building functions under control of the control server.

The wireless air flow control system may include a building air flow generation mechanism. The zone controller opens and closes the damper in response to activation and deactivation of the air flow generation mechanism.

The wireless air flow control system may include a processor that sends a signal to  
5 a zone controller to identify the damper. The processor can determine if a signal received by the radio frequency communications circuit is addressed to the damper.

Other features and advantages will be apparent from the description, the drawings, and the claims.

## 10 DESCRIPTION OF DRAWINGS

Fig. 1 is a block diagram of an exemplary automation system.

Figs. 2 and 3 are block diagrams of a control server of the system of Fig. 1.

Fig. 4 is a diagram of a universal controller of the system of Fig. 1.

Fig. 5 is a perspective view of an exemplary communications module of the  
15 system of Fig. 1.

Fig. 6 is a perspective view of an exemplary retrofit plug.

Figs. 6B-6D are block diagrams of a retrofit plug of the system of Fig. 1.

Figs. 7A-7C are exemplary screen shots of touchpad user interfaces of the system  
of Fig. 1.

20 Fig. 8 is a block diagram of a distributed video network.

Fig. 9 is a block diagram of a retrofit damper system.

Fig. 10 is a block diagram of a retrofit damper of the system of Fig. 9.

Fig. 11 is a block diagram of a zone controller of the system of Fig. 9.

Fig. 12 is a block diagram of function blocks for home manager software.

25 Fig. 13 is a screen shot of the home manager temperature control of the software  
of Fig. 12.

Fig. 14 is a screen shot of the home manager kitchen assistant of the software of  
Fig. 12.

Fig. 15 is a block diagram of a metering network.

30 Fig. 16 is a screen shot of a remote monitoring service.

Fig. 17 is a screen shot of a temperature monitoring interface.

Fig. 18 is a block diagram of a central locking network.

Fig. 19 is a block diagram of a security network.

Fig. 20 is a block diagram of a lighting network.

Fig. 21 is a block diagram of a heating network.

Fig. 22 is a block diagram of a zone controller and a heating network.

Fig. 23 is a screen shot of a home manager heating control interface.

Fig. 24 is a block diagram of an appliance control system.

5 Fig. 25 is a screen shot of an exemplary virtual control panel of the system of Fig. 24.

Figs. 26A and 26B are block diagrams of a refrigeration monitoring unit.

Figs. 27A and 27B are block diagrams of a refrigeration monitoring unit.

Like reference symbols in the various drawings indicate like elements

10

## DETAILED DESCRIPTION

### *SYSTEM OVERVIEW*

15 An automation system, which may also be referred to as a building control (BC) system, may be used to automate a home, an office, or another type of commercial or residential building. In the residential context, the BC system establishes a home network that controls, coordinates, facilitates, and monitors user-designated activities within the home. The BC system provides compatibility between external and internal networks, systems, and appliances, and is modular in construction to allow easy expansion and  
20 customization. The BC system can be retrofitted for use in existing structures and legacy appliances without the need for drastic remodeling, added wiring, or complicated installation/customization, and can be installed by a homeowner with minimal instruction. Professional installation and maintenance also are simplified, so as to avoid the high costs typically associated with custom home automation.

25 The modularity of the BC system provides for easy customization for either commercial or residential use. For residential applications, system elements may be sealed for easy installation, configuration, and aesthetic appearance. Expansion within the residential applications can be accomplished by adding new modules to the system. On the other hand, for commercial or advanced residential applications, the system can be  
30 custom configured and expanded through the additional use of expansion boards, PCMCIA cards, or plug in solutions. Although the following examples are primarily described with reference to home applications, the described devices and concepts also are applicable for commercial use.



### The BC System

Referring to Fig. 1, an exemplary BC system is based around a control server 100 that manages a number of primary networks including: an internal home network 1 (e.g., a USB or Ethernet network), a video distribution network 2 (e.g., Peracom AvCast System), a power line carrier (PLC) network 3, a wireless radio frequency (RF) communications network 4, and an Internet portal 5 (e.g., a DSL modem). BC system devices attach to the control server 100 through one of these networks, and each network services a different aspect of home automation.

The home network 1 can include a residential broadband gateway 105 for high-speed interaction with the Internet and service providers. In addition, a number of computer systems 190 can be connected to provide access to the control server 100 and between the computer systems 190. The home network 1 can be implemented using any LAN system, such as, for example, an Ethernet system. The computer system 190 can be used as an interface for controlling home automation and running home automation software.

The video distribution network 2 can include an AvCast subcomponent 180 that plugs into the control server 100 to coordinate multimedia activity between, for example, video monitors 182 and a satellite TV system 181. The video distribution system 2 also can act as an interface to the control server 100.

The PLC network 3 provides control of switches 171, power outlets 172, and smart appliances 135. In addition, a number of communications modules 120 can be used to communicate with legacy devices, such as a range 130. Retrofit plugs 125 also can be used within the PLC network to provide communication with legacy devices. A number of different interfaces, such as, for example, touch pads 152, 154 and portable tablet 150, can be used to provide for user interaction with the control server.

The RF network 4 includes communications modules 120, legacy appliances 132, and interfaces 152 and 154. In addition, a universal controller 110 can be used to control appliances, such as a furnace 131. The RF network 4 can be connected with sensors 141, 143, and 145 to monitor home utilities such as electricity, gas, and water, respectively. A smart thermostat 133 and a damper system can be used to control and optimize home heating and cooling.

The Internet portal 5 allows access and control of the BC system from a remote location. In addition, service providers may remotely monitor appliances, usage, and

security within the home. New applications and upgrades of existing software can be obtained through the Internet.

### BC Controller/Server

5       The control server 100 is the core of the BC system. The control server 100 provides multi-protocol routing and supervisory control for communicating appliances and general purpose device controllers. The control server 100 is responsible for communicating with subordinate system devices while making data available to other supervising devices. The supervising devices include local user interfaces or Internet-  
10   based remote interfaces.

      The control server 100 features pre-configured control function blocks or objects, in addition to user defined control strategies, that run on a real time control engine capable of executing combinational and sequential logic control. The control engine may be application specific or generic depending on the size and the intended purpose of the  
15   BC system in which the control engine is implemented. The control function blocks executed by the control server 100 are designed to operate in a number of modes, such as, for example, an away mode, a sleep mode, and a vacation mode, among others. The control server 100 operates appliances and subsystems based on the BC system's current operating mode. For example, when entering the away mode, the control server 100 can  
20   activate the security system and turn down the heat or the air conditioning. In addition to modes that can be selected and transitioned, "hard-wired" functions are provided to initiate actions based on recognition of certain external conditions. One example of such an action is the flashing of red screens on all televisions and displays in a home when a fire alarm is tripped.

25       The control server 100 also provides for protocol conversion. For example, if an attached appliance has a stripped-down protocol, the control server 100 adds the missing elements to make the appliance appear to be compliant with a desired industry standard protocol. Where the physical layer necessary for communication with a device is not available in the control server 100, add-on units may be used to attach the control server  
30   to the device. The control server 100 accommodates multiple protocols and physical layers through communications modules 120 attached between devices using foreign protocols or physical layers and the control server 100. Similarly, smart modules, retrofit plugs, and universal controllers may be used to provide the function of protocol conversion. The control server 100 interfaces with any of the system graphic user

interfaces (GUIs), PC networks, Internet, and all other portions of the BC system as described in greater detail below.

The control server 100 is modular in design and can be scaled with regard to size, functions, and hardware desired for a specific implementation. One example of a control server 100 is shown in Fig. 2. As shown in Fig. 2, the control server 100 includes a processor 200. The processor 200 is connected to a board with a communications bus 202, an I/O port 203, and interfaces including a RF digital signal processor 207, a 10 BASE-T interface 206, a modem 205, and a serial interface 204. The interfaces provide communication between the control server 100 and the primary BC system networks 1-5.

The processor 200 also is connected to a flash memory 224, a RAM 222, and an EEPROM 220. An optional power source (RTC xtal and Battery) 230 can be used to power the control server 100 in the event of loss of power. A number of communication ports are connected with the various interfaces. The communication ports can include a 10 BASE-T port 212, a TELCO DAA 214, a RS-232 port 216, a RS-485 port 218, and a S-BUS port (or USB port) 219.

In addition, a PLC controller 280 and an EmWare Adapter 260 are connected to the communications input/output port 203. These devices may be configured on the board or as add-on modules. The EmWare adapter 260 can be used to communicate with and control appliances or systems that use an EmWare communications protocol. Other adapters for other communications protocol or systems can be provided in an original device or as add-on, plug-in applications. A VGA controller 240 is provided for connection with a PC raster port 242.

As shown in Fig. 3, the control server 100 also can be implemented as a main board 300 with optional add on boards and PCMCIA slots. The main board 300 includes an Ethernet connection 301, a serial I/O port 315, and an optional slot for a PC card 305. Daughter boards are connected to the main board using a system bus connector. A daughter board typically includes an eight-way serial interface card and a four-way Ethernet card, with an optional slot for a PC card. The main board 300 can be implemented using a Motorola MPC860 PowerPC core 304, a memory (including flash 306, DRAM 308, NVRAM 307), and I/O including: Dual SCC channels with HDLC interface, two status LEDs, two Tx/Rx pair communication status LED indicators, a debug RS-232 serial port, a PCMCIA slot, 10/100 Base T physical interface connector, an EIA-232 serial port, an EIA-485 serial port, and an EIA-485 serial port with 24V PSU input.

External connections from the main board 300 include a single RJ-45 connector 301 for an Ethernet connection and a number of RJ-11 connectors for serial communications. The first RJ-11 connector 303 can support two connections for 24V DC serial communication for PLC 310 and a second connector 302 for an EIA-485 serial interface. The serial interfaces on the main board 300 can use RJ-11 connectors. PLC interfaces to the main board, as well as other boards, are made through a serial interface to, for example, external communications modules. The primary PLC interface 310 is enclosed inside the external transformer housing that provides 24V DC to the control server.

Functionally, the Ethernet interface 360 to the main board 300 is the primary WAN or broadband interface. Typically, the interface 360 can be connected to a cable modem or a DSL modem and can provide a firewall to secure data access. The EIA-232 interface 350 is provided for programming and debugging of the control server 100 in the field. The free EIA-485 interface allows flexible customization of the control server 100 or connection to an external POTS modem, a serial interface (third party device), or a second PLC.

The control server 100 main board 300 can accommodate a number of additional EIA-485 interfaces (e.g., eight interfaces). The additional interfaces can provide connection to third party devices, such as security panels, lighting control systems, HVAC zoning systems, and others. The additional interfaces also can be used for connection to external bridges, such as additional PLC interfaces, RF subsystems, communications modules, and retrofit plugs.

The Ethernet board (not shown) on the main board 300 includes four 10/100 base T Ethernet interfaces. The four interfaces provide connections for two secure LAN connections, one unsecure LAN connection, and one unsecure WAN connection.

The control server video board (not shown) can include the following interfaces: video out/VGA out, video in, dual USB – printer, keyboard/mouse interface, IR interface, and PCMCIA slot (optional). The video board provides video I/O as well as IR command transmission. A keyboard and mouse combination can be used with the video board through a USB or USB-to-RF interface (in the case of a wireless keyboard or mouse). A second USB connector can interface with printers, digital cameras, and other peripheral equipment. Functionally, the board accepts video input and digitizes the video for use by the rest of the BC system using the MPEG4 standard. The video board also provides video output as a TV channel for broadcast on connected televisions within the home.

### Universal Controller

The universal controller 110 is an optimized form of the control server 100. The universal controller 110 performs a single dedicated task, such as HVAC control. As a result, the universal controller 110 includes only the input and output features that are necessary for the dedicated task. The universal controller 110 can be used in a stand-alone configuration with access through remote dial-up, Internet access, and/or a touchpad interface. The universal controller 110 also can be controlled and monitored by the control server 100. The universal controller 110 communicates with the control server through the RF or PLC networks or by directly wired serial communication. The universal controller 110 can be used to handle applications that are pre-packaged for physical distribution, that have outgrown the capability of the control server 100, or that have special features not handled by a standard control server 100. In addition, the universal controller 110 can be implemented as a daughter board to the control server 100.

According to the example shown in Fig. 4, the universal controller 110 includes a processor 400 to which a memory 420 is connected. The memory includes communications software for the remote uploading and downloading of data and software for control of specific attached subsystems, such as, for example, HVAC control. The universal controller 110 also includes 16 analog/digital switches for receipt of signals from sensors. An RS-232 communication interface 430 is provided for PC, modem, and other communication with serial communication ports of other devices. Twenty four relays configured in pairs of twelve are provided as output 440. Each relay in a pair can be configured for an individual device that is powered from a common source.

### Control Modules

Referring again to Fig. 1, control modules (e.g., 120 and 125) allow legacy appliances that have already been purchased by a homeowner or commercial operator to be integrated into a home automation system. This is important because appliances are expensive and have relatively long operational lives. As a result, appliances typically are not replaced until failure. Therefore, for existing appliances to be incorporated in a total home or commercial automation system, an interface is needed to allow communication with the automation system so that a user is not forced to buy a network ready appliance.

The control modules provide such an interface in a form that can be installed easily by the homeowner or business operator.

In addition, manufacturers may not wish to sell devices that are network/system compliant due to the added cost associated with outfitting the appliance with the necessary software and control circuitry. Therefore, a control module can be inserted into an appliance aftermarket, or by the manufacturer, to provide network protocol compliance.

Two examples of control modules are the appliance communications module and the retrofit plug. The appliance communication module acts a bridge between the control server (or remote monitoring service provider) and an appliance by providing protocol conversion that is specific to the appliance. The communication module also allows the control server to control the appliance. The retrofit plug provides for remote monitoring and diagnosis of an appliance, and is easily installed with any appliance.

#### Appliance Communications Module

The appliance communications module 120 is adapted to be received by an appliance having an appliance controller. The communications module 120 includes a communications protocol translator. The communications protocol translator translates signals received from a communications media into appliance controller signals. The translator also translates appliance control signals received from the appliance controller into a communications protocol to be output to an appliance communications network. The communications module 120 also can include a power line transceiver connected to the communications protocol translator and a power line driver connected to the transceiver and the connector. The communications module's connector is electrically coupled to the appliance controller. Alternatively, the communications module 120 can include a radio frequency (RF) transceiver or modem for connection to an appliance network. An example of the communications module 120 is shown in Fig. 5.

The protocol translator translates signals received from the network into appliance controller signals. The translator also translates received appliance control signals according to a communications protocol to be output to the network through the modem or transceiver.

A network ready appliance is also provided. The network ready appliance includes an appliance controller having a communications port. The appliance also includes a cavity, defined by walls, that is adapted to receive the communications module

120. An opening in a wall of the appliance allows access to the cavity. A connector is attached to one of the cavity walls. A communications line connecting the communications port and the connector also is provided. The connector is electrically coupled to the appliance controller or to the main power supply. The network ready appliance further includes a detachable cover provided over the opening to protect a user from electric shock. Alternatively, the appliance connector can be recessed in a cavity to protect the user against shock.

The communications module is described in detail in U.S. Patent Application 09/511,313 title "COMMUNICATION MODULE" which was filed February 23, 2000, and is incorporated by reference in its entirety.

#### Retrofit Plug

The retrofit plug 125, shown in Figs. 6A-6D, is a plug-through device that is either attached in line with the main appliance electrical supply or internally in line with a main control board interface connector of an appliance 130. As shown in Fig. 6A, the retrofit plug can be installed on legacy equipment by simply connecting the retrofit plug 125 to the pins of the appliance that are used to supply power to the appliance. As a result, a legacy appliance can be easily incorporated into a network to allow monitoring and control of the appliance by a homeowner without the need for custom or professional installation.

As one example of an internal connection, control signals inside certain refrigerators pass through a marshalling connector connected to the main control board. By connecting a retrofit plug to this connector, all signals within the refrigerator can be tapped for diagnostic data. The diagnostic data may be sent to the control server 100 that monitors the appliance 130, for example, through the PLC network 3. The data gathered from the appliance 130 can be stored by the control server 100 or downloaded to a remote database maintained by a service provider.

In a standalone application, the control server 100 can be replaced by a gateway connected to a PLC network. Data from the retrofit plug can be sent through the PLC network to the gateway. The gateway transmits the data to a service provider monitoring the appliance 130. The plug may operate as a stand-alone unit by equipping the plug with a modem to communicate with an external computer (e.g., as provided by a monitoring service). The retrofit plug 125 also can be equipped with an RF transceiver so that the

plug may be incorporated in a wireless network 4 for monitoring and control of an associated appliance.

Fig. 6B shows an exemplary retrofit plug 125 that provides an interface between an appliance's electronic control system and the control server 100. The retrofit plug 125 has an outer housing 600 made of, for example, an electrically-insulating plastic (class II) or (class I). The retrofit plug can include a number of couplers. For example, the housing 600 includes slots 601 and 602 for connection with pins from the appliance 130, for example, on a power cord, that are used to supply power to the appliance 130. Pins 603 and 604 extend from the housing for connection with the mains that supply power to the appliance 130. Although only two pins and two slots are shown in the example of Fig. 6B-D, additional pins and slots may be included as needed to be compatible with any particular appliance's power supply. For example, a retrofit plug could attach to a three pin connector by adding an additional slot and pin for an earth connection or to a four pin connector having two live pins, a neutral pin, and a ground pin by adding slots and pins for the second live pin and the earth pin.

The retrofit plug 125 includes a power supply 650 for supplying power to a measure and transmit circuit 620, a power line communication (PLC) transceiver 630, and a line driver 640. The power supply 620 powers the retrofit plug's components (620, 630, and 640) by converting the appliance AC voltage (e.g., 100V to 264V and 50/60 Hz) to a 5/10V DC voltage. The power supply 650 receives power from pins 603 and 604 through lines 641 and 643.

The retrofit plug includes monitoring circuitry. For example, a measure and transmit circuit 620 is connected to a current transformer 610 to measure the current being drawn by the appliance attached to the retrofit plug 125. Other circuitry that could be used to monitor the current drawn by the attached appliance includes a Rogowski coil or a shunt.

The measure and transmit circuitry 620 may include a processor (e.g., an ASIC, a DSP, a microprocessor, or a microcontroller) and memory (such as an integrated circuit (IC) memory or a flash memory). The measure and transmit circuit 620 can simply monitor and report the current drawn by the attached appliance 130. Specifically, the measure and transmit circuit 620 may monitor current draw timing, duration, and amount. In more sophisticated applications, the measure and transmit circuit can be upgraded to perform bi-directional communication by translating between a communications media protocol used by the control server 100 and the appliance's control protocol. In addition,



if the appliance's load current is measured, an indication of power can be derived from the square of the load current. Line voltage may be measured and multiplied by the load current to measure true power consumption.

The current draw data or power data can be stored by the measure and transmit circuit 620. The measure and transmit circuit 620 can be programmed to periodically send the measured data to the control server 100 as part of a general monitoring function, such as, for example, energy management and logging functions. In addition, the measure and transmit circuit 620 can be programmed to compare measurement data to specific electronic signatures stored in a table in the memory of the retrofit plug 125. The measure and transmit circuitry can send messages to the control server 100 in response to events which indicate a state of the appliance 130 requiring some further action (e.g., shut off power).

The retrofit plug 125 also includes a communications circuit. The communications circuit sends data from the measure and transmit circuit to a remote processor, such as, for example, the control server 100. The communications circuit may also receive signals from a remote processor, such as, for example, the control server 100. The communications circuit may include a transmitter and a receiver or a transceiver, a power line communication (PLC) transceiver 630, and a line driver 640. Measurement data is supplied to the PLC transceiver 630 and are coded for PLC transmission on the PLC network 3. The PLC transceiver 630 operates a line driver 640. The line driver 640 places the measurement data as PLC coded signals on lines 641 and 643 according to a network protocol.

The PLC coded signals are supplied by the retrofit plug to the external power circuit that supplies power to the appliance. The control server 100 monitors the external power circuit to receive the PLC coded signals. In this way, the control server 100 can monitor appliances connected to the external power circuit and the appliances can exchange data with the control server 100 or other appliances connected to the network.

The control server 100 or a remote monitoring service is able to perform diagnostic interpretation about the appliance 130. In this manner, the BC system can determine the health of the appliance, the appliance's current function (e.g., how many burners are on, oven capacity, temperature monitoring in a refrigerator, and washer and drier cycles including length), and device failure (including cause). For example, if a current signature or power usage for the light bulb in a refrigerator is detected as being active over an extended period of time, the control server 100 can determine that an open

door condition exists and can generate a message for display on an interface 150 to alert the user to shut the door.

The retrofit plug 125 also can include a power-switching device under control of the measure and transmit circuit 620. The power-switching device enables remote shutdown of the attached appliance, for example, through the retrofit plug 125, if a situation occurs that may damage the appliance if operation is continued or if a hazardous condition may result from continued operation. The power-switching device also can permit dimming and variable current flow regulation for remote control of the appliance.

The retrofit plug 125 can be designed specifically for a particular appliance. As a result, the retrofit plug 125 can perform sophisticated diagnosis, monitoring, and control specific to the appliance. Alternatively, the retrofit plug 125 can contain sufficient memory that control data or programs can be downloaded to the plug from the control server 100 through the PLC network. The software and data may be provided directly by the service provider. Software also may be installed in the field using a flash memory chip that is inserted into the retrofit plug 125.

As shown in Fig. 6C, an optional battery 655 can be connected with the power supply 650 to provide power to components of the retrofit plug in the event that power is lost. The battery may be a rechargeable battery that charges while the retrofit plug is supplied with power, if the battery is not in a fully charged state.

A serial port or other communications interface also can be provided in the retrofit plug to provide additional communication capabilities. The serial interface may be used for connection with another sensor to provide additional data about the device connected to the retrofit plug 125. The additional data can be transmitted to a remote monitoring device using the PLC network.

Other types of communications media also can be supported by the retrofit plug. As shown in Fig. 6C a modem 670 is provided within the retrofit plug 125 to provide communication to a network through a phone line. Alternatively, a wireless modem could be used for remotely located appliances where a phone line may not be available. The processor in the measure and transmit circuit 620 handles modem dial-up to an external network and provides buffering for the two-way data transfer on line 671. A phone line can be attached to the data transfer line 671 by adding a RJ connector in the housing of the retrofit plug 125. The modem 670 does not have to be included within the retrofit plug 125, instead, the modem can be a snap-on attachment to the retrofit plug 125.

As an example, the modified retrofit plug with serial port and modem can be used to monitor a commercial freezer. A retrofit plug 125 is installed on the main power supply to the freezer. In addition, a temperature sensor is fitted inside the freezer compartment to measure the freezer's interior temperature. The temperature sensor is attached to the retrofit plug 125 using the serial port. The battery provides power capability to the retrofit plug 125 and its components. In addition, the retrofit plug 125 has a telephone modem. In this case, if the main power supplied to the freezer fails and the freezer temperature approaches 32 degrees, the retrofit plug 125 can sense the rise in temperature using the remote temperature sensor and dial the operator or monitoring service to alert that food spoilage is possible.

### **Operator Interfaces**

Operator interfaces that can be used with the BC system include, for example, single room touch pad, small touchpad, standard touchpad, portable tablet, PC, and web enabled phones. In general, the look and feel of the operator interfaces is consistent between each interface where possible, and may look as is shown in Figs. 7A-7C.

#### **Single Room Touchpad**

The single room touchpad is basic in design and is intended for installation into a standard light switch box. The touch pad is capable of controlling at least two functions such as temperature and lighting. The single room touchpad also can accommodate an intercom for communication between rooms in the home. Through use of RF or PLC communications, the touchpad may be sized to fit in a standard switch box for ease of installation and integration.

#### **Small Touchpad**

The basic functionality of the small touchpad is that of a home automation system controller or room controller. Where appropriate, colors and sounds can be used to catch a person's attention or to signal an alarm. An exemplary small touchpad 154 is shown in Fig. 7A.

The small touchpad 154 includes a display, such as, for example, a 2.6" color TFT display. The display 701 shows the controls for lighting in a room. A room selection bar 702 displays the area that the small touchpad is being used to control. An arrow button 703 allows the user to switch between multiple areas. Control bars are used to control

appliances within the area, such as, for example, a control bar 705 for overhead lighting and a control bar 708 for a table light. The amount of overhead lighting can be adjusted by selecting the + or – buttons 706 and 707 on the display. The side table light 1 can be turned on or off using the buttons 709 and 710 on control bar 708. Additional control bars, if any, can be accessed by using the down arrow 711. A back button 712 navigates the user to the previous display. Selections can be made by touching the screen using a stylus, a finger, or the like. Three buttons are provided for controlling the display of the small touchpad 154.

#### 10      Standard Touchpad

The standard touchpad 152 is a sophisticated operator interface designed for more enhanced presentation of information. The standard touchpad includes a 4 inch, 320 x 240 pixel personal data assistant (PDA)-style display and is capable of displaying video images as well as textual or icon based images. It is also capable of presenting web content in the manner of alerts or breaking news items. The standard touchpad 152 provides alarm and alert notification by means of color and sound, examples of which are:

- Red-Flashing with buzzer – extreme alarm such as fire or intrusion detection;
  - Red with beeper – alarm such as system fault or pre-defined alarm condition (the two year old has entered the pool area);
  - Yellow with beeper – general alert such as hurricane warning or other weather or news advisory; and
  - Green with low level beeper – general information, such as clothes are ready from the dryer.
- Being more sophisticated, the standard touchpad 152, which may be the only operator interface available, is not bound to controlling a single portion or subset of the BC system, and, instead, is capable of looking at the whole environment controlled by the BC system. It also is capable of configuring the system. An option for video display allows the standard touchpad 152 to present low-grade camera images such as, for example, from a camera positioned at the front door. A speaker and microphone can be included to provide an intercom with the video feature.

The standard touchpad 152 builds on the display of the small touchpad 154. The standard touchpad includes a display 731. A room selection bar 732 appears at the top of the display. The user may switch between rooms using the arrow button 733. Multiple

control bars 735-738 also are displayed. Additional control bars can be accessed by using the down arrow 741. A back button 742 is provided for navigating back to the previous display window. Four keypad input buttons 744 are provided for immediate navigation to preset display windows and to manipulate the display window 731.

- 5           The standard touchpad 752 can be mounted onto a wall and hard wired. The standard touchpad 752 also can be used as a portable unit having a cradle for storing and re-charging the unit when not in use.

#### Portable tablet

- 10           A portable tablet 150 can be used to communicate with the BC system provided that required connectivity options are available. The portable tablet 150 is used to present all aspects of the standard touchpad devices as well as more detailed configuration options. In addition, the portable tablet provides video and web browsing capabilities. The portable table may have a 12" display and may be used in the distributed video  
15 network to control all televisions and video devices. As a result, a parent could use the portable tablet to flash a message on the children's TV – "its time for dinner." The portable tablet may be implemented using a web pad.

- The web pad interface includes an applications bar 756 that allows the user to switch between the various applications supported by the BC system. A tool bar 75 for  
20 selecting specific features, such as, for example, a particular appliance to control, is provided on the top of the display. A room selector arrow 753 also is provided. The portable table 150 is able to display a number of control bars (754, 755). A down arrow 758 provides selection of additional control bars associated with the appliance, if necessary. A back button 757 is also provided to move to the previous display screen.

25

### Video Distribution Network

As shown in Fig. 8, a BC system includes a control server 100 connected to a number of primary networks including: an Ethernet LAN 1, a PLC LAN 3, an RF LAN 4, an RS485 LAN, a WAN (connected by a POTS or ISDN line), and a video distribution network 2. The video distribution network 2 includes a AvCast daughter board 180, a media caster module 810, a cable caster module 820, and a web caster module 830. The AvCast daughter board 180 plugs into a slot on the control server 100. The AvCast daughter board 180 can include the following interfaces: video out/VGA out, video in, dual USB – printer, keyboard/mouse interface, IR interface, and PCMCIA slot (optional). The video board provides video I/O as well as IR command transmission. A keyboard and mouse combination can be used with the video board through a USB or USB-to-RF interface (in the case of a wireless keyboard or mouse). A second USB connector can interface with printers, digital cameras, and other peripheral equipment. Functionally, the board accepts video input and digitizes the video for use by the rest of the BC system using the MPEG4 standard. The video board also provides video output as a TV channel for broadcast on connected televisions within the home.

The media caster module 810 is a digitally-tuned audio-video modulator with user-selectable UHF or CATV channels. The media caster module 810 is individually addressable. The media caster module 810 allows signals from the control server 100 to be displayed on TVs 182 by converting the video output from the control server 100 to a TV channel. The resulting converted signal can be distributed to a number of TVs 182 using the cable caster module 820. Using the output TV channel, the control server 100 can broadcast video data, virtual control panels, security camera video output, messages, alarms, and control interfaces to any connected BC system interface.

The cable caster module 820 provides bi-directional signal-splitting with 6 dB of amplification to compensate for cable loss. The cable caster module 820 distributes a video signal feed to any connected TV 182 while providing enough amplification to ensure crisp TV pictures despite long cable runs and signal-splitting.

The web caster module 830 converts SVGA and audio inputs to a TV signal. The converted signal can be distributed to multiple TVs 182 and interfaces (e.g., 190 or 150) using the cable caster module 820. The web caster module 830 allows the data displayed on a PC screen 190 to be viewed on a TV 182. As a result, the TV 182 can be used as a second monitor for viewing, for example, web pages.

A gateway 105 offers broadband connection to a CATV system. The gateway 105 connects with the control server 100 through the high-speed Ethernet link 1 using, for example, a Cat5 cable. When used with the video distribution network 2, video signals can be routed through the media caster module 810 and cable caster module 820 to other  
5 TVs 182 using standard co-axial cable. In addition, the video signal from the gateway 105 can be fed directly into the cable caster module 820 for distribution by co-axial cable throughout a building.

The gateway 105 provides a high-speed link enabling services such as, for example, video on demand, from the CATV connection. The high-speed link also  
10 provides a fast Internet connection for browser software running on the portable tablet 150 or the 90. Services, such as teleshopping, can be provided through the video distribution network 2, if supported by the cable service provider. The gateway 105 also provides a high-speed data link to the rest of the home network 1 supporting real-time video capability. The gateway 105 can be implemented as a standalone unit or as a plug-  
15 in module in the control server.

### **Smart Appliances**

Smart appliances (e.g., 135) are network ready appliances that can be connected to the BC system without additional modification or interfaces. Once connected to the BC  
20 system, a smart appliance can be controlled by the control server 100. In addition, the smart appliance can be remotely controlled through use of a virtual control panel displayed on a BC system interface, such as a portable tablet 150. A smart appliance has either a communications module or a smart module that connects to the internal appliance controller to provide compatibility with the control server 100. The smart module and  
25 virtual control panel are described in detail in copending U.S. Application No. 09/378,509, titled "DISTRIBUTED LIFE CYCLE DEVELOPMENT TOOL FOR CONTROLS" which is incorporated by reference in its entirety.

### **Retrofit Damper**

30 A wireless forced air damper for zoned HVAC control is shown in Fig. 9. The damper 900 is available in industry standard sizes to replace floor, wall, or ceiling registers. The damper 900 communicates with a smart HVAC zone controller 133 using wireless RF communications signals 901. A sensor 910 can be placed in the area serviced by the damper 900 to report local conditions to the zone controller 133. The sensor 910

communicates through the RF network 3, the PLC network 4, or through direct wiring to controller 133. Alternatively, the sensor 910 can be included in the damper 900 as described below. Additionally the sensor can be a wireless sensor 915. The zone controller 133 can be implemented as a stand-alone unit. Alternatively, the zone controller 133 can be supervised by the control server 100. If incorporated in the BC system, the zone controller 133 can be controlled by any of the BC system interfaces, such as the portable tablet 150. In addition, home manager software can be used to control zone controller 133 according to a number of predetermined modes of operation. Thermostats can be provided to provide user control of individual zones within a building. Existing wired thermostats 155 can be coupled to the zone controller to allow user control of the HVAC system. Additionally, wireless thermostats 157 can also be used. The wireless sensor 915 and thermostat 157 can be incorporated into a single unit.

A block diagram of a damper 900 is shown in Fig. 10. The damper 900 includes a register 1010 for controlling air flow through the damper 900. An RF transceiver 1050 receives control signals 901 from the zone controller 133 and transmits status/sensed data to the zone controller 133. A power supply 1030, such as, for example, a battery or other self-contained power source, powers the damper's electrical components so that the damper is self-contained and does not require any additional wiring for power. A mechanism 1020, such as, for example, a solenoid, a spring, a shape memory wire, or a magnetic latching mechanism, is coupled to the register 1010. The mechanism 1020 actuates the register to allow air flow in response to a signal received from the controller 1040. A magnetic switch or latching mechanism having thousands of latching cycles may be used as the mechanism 1020 to reduce power consumption and to extend the operational life of the damper between replacing/recharging of the power supply 1030. For example, the latching system can have one or two magnets. A capacitor can be charged from the battery using a trickle charge. In response to a control signal the capacitor can cause an induction, which actuates the magnet that holds register in one operation state. A second magnet or gravity may be used to return the register to its other operational state. A variable mechanism also may be used to control the register such that the register can be partially opened to regulate air flow (e.g., 100% open, 80% open, 50% open, and closed).

The controller 1040 can monitor the power supply 1030. When the power supply 1030 reaches a minimum charge threshold, the register 1010 is placed in an open state so that the register 1010 is left in the open position if power fails. In addition, the controller



1040 may notify the zone controller 133 that the power supply has reached a minimum threshold. Once notified, the zone controller 133 alerts the user that the power supply 1030 needs to be replaced/recharged. Alternatively, the zone controller 133 may poll the damper 900 to send a measurement of the power supply's remaining charge to the zone  
5 controller 133. Upon receipt of the measurement, the zone controller 133 performs the threshold analysis and alerts the user if necessary. A cover or door that is accessible from the room is provided to ease access to the power supply 1030.

When the fan unit on the air conditioner or the furnace is on, or when a preset condition occurs, the zone controller broadcasts a control signal to the controller 1040 to  
10 cause the mechanism to activate the register 1010. In addition, the zone controller 133 may selectively open or close dampers 900 based on a control program, a mode of operation, or upon a request from a user interface. Drain on the charge of the damper's power supply 1030 may be reduced by waiting until air flow has stopped before closing the register 1010 to limit the force needed to close the register 1010. A sensor 1060 may  
15 be connected to the controller 1040 to measure temperature at the damper 900. The measurement is supplied to the zone controller 133 as input to zone and comfort control software operating in the zone controller 133 or the control server 100.

The zone controller 133 is shown in Fig. 11. The zone controller 133 can be implemented using a universal controller 110. The zone controller 133 includes a  
20 processor 1110 for controlling and monitoring the dampers 900. A memory 1120 is provided to store climate control software and for operation and identification of the dampers 900. An RF transceiver 1130 transmits control commands to and receives responses from the dampers in response to the commands. The dampers 900 are periodically polled by the zone controller 133 for status and sensor data. The data can be  
25 stored in the memory 1120 for analysis by the processor 1110 or the data may be transmitted to the control server 100 for storage and analysis. If no response is received from a damper 900 after being polled a number of times, the zone controller 133 notifies the user or control server 100 that the damper 900 is not responding and may need servicing. An optional I/O interface 1140 is provided for connection with external  
30 sensors 910. An RS-232 interface 1150 allows peripheral equipment, such as a handheld unit or a modem, to be connected to the zone controller 133. An RS-485 interface 1160 is provided to connect the zone controller 133 with the control server 100.

Each damper 900 is assigned a unique HVAC control ID number. The zone controller 133 uses the control ID number to identify a damper. Each installed damper

900 is dedicated to a single zone controller 133 and rejects interference from any other controllers, unless released by an authorized security code stored in the damper 900. Initial configuration of the dampers 900 can be accomplished according to one of the following methods.

5       According to a first method, zone controller 133 is placed in an initialization mode. Once the zone controller 133 has been placed in the initialization mode, the dampers 900 can be powered up one at a time. Upon powering up, a damper 900 broadcasts a message with the control ID to the zone controller 133. Configuration software in the zone controller 133 acknowledges the received broadcast message, stores  
10   the control ID, and prompts the user to identify the location of the damper. After the user enters the location, the zone controller 133 awaits receipt of the next initialization message and repeats the process until the locations of all dampers 900 are identified.

      According to another method, barcodes can be used to configure the dampers 900 upon installation. When the damper is installed, a barcode on the damper 900 is scanned  
15   using a handheld device with a barcode reader. The barcode encodes the control ID for the damper 900. After reading the barcode, the handheld device prompts the installer to enter the location of the damper 900. The handheld device then associates the control ID with the entered location and stores this information in a table. Alternatively, barcodes identifying predetermined locations are placed in corresponding slots that accommodate  
20   the dampers 900. The installer scans the barcode in a slot using the handheld device. The installer then scans a barcode on the damper to read the damper's control ID and associates the damper with the location. After installation of the dampers, the damper control ID and the location data are downloaded to the zone controller 133 by connecting the handheld device to a port on the zone control 133.

25       According to another method, a barcode identifying the damper's control ID number can be peeled off the damper and placed on a location sheet. The sheet is scanned to determine a damper's control ID number and location. Once scanned, the data is downloaded to the zone controller 133.

      After configuration of the dampers, according to any of the methods described  
30   above, the zone controller 133 controls the damper units 900 through RF control signals according to the instructions of the zone controller's operational programming. The zone controller 133 can broadcast control messages that are addressed to all dampers, to a set of dampers, or to a specific damper using the control ID numbers.

The above-described system is not limited to dampers. The control system could be applied to other flow control devices, such as hydronic systems using, for example, a valve instead of a register. Although the actuation devices and flow control mechanisms would be specific to the environment, the control circuitry and operation would be substantially the same.

### **HOME MANAGER SOFTWARE**

The home manager software incorporates a number of fundamental modes of operation. Six exemplary modes are: a stay mode, an away mode, a bedtime mode, a sleep mode, a vacation mode, a wake-up mode, and a custom mode. The stay mode is configured to operate when the home is occupied. In this mode, certain aspects of the home, such as comfort control, are set automatically by the home manager. Other aspects, such as lighting scenes, are independent of the mode and are set either by the occupant or based on time of day occurrences.

The away mode implies that the home is occupied but no one currently is at home. When operating in the away mode, the BC system can override other programming, such as, for example, lighting control, to simulate occupancy and to arm the security system. During operation in the away mode, other system operations, such as energy saving control, can conserve energy by cutting back on hot water or comfort settings.

A bedtime mode (not to be confused with a sleep mode described below) can be incorporated in homes that have children. The bedtime mode is used when the children have gone to bed but there are still one or more adults awake in the home. Bedtime mode activates certain monitoring systems, such as, for example, child monitoring, checking to make sure certain televisions and other entertainment devices are off, and alerting the adults if certain lights come on (e.g., the children's rooms or bathrooms). Using this mode, parents can monitor sleeping children or be alerted when children wake up.

Sleep mode is used to put the house to sleep. While in sleep mode, the BC system arms the security system, and ensures that all doors are closed and locked, all lights and appliances are off, and that comfort settings are altered appropriately.

Vacation mode provides an enhanced state of security when a family is away from the home for an extended period of time. In this mode, lighting and entertainment systems may be used to simulate occupancy. Energy hungry systems, such as, for example, comfort control and hot water, may be reduced to minimum settings. Appliances may be monitored for unnatural activity, such as, for example, activation of

the coffee pot (which normally would not switch on in the morning if the family were on vacation). However, the vacation mode can make allowances for house sitters who periodically bring in the mail or check on the house.

Wake-up mode is a choreographed schedule of events that happens as the house  
5 leaves sleep mode and enters stay mode. A number of timed events take place in the wake-up mode that can be customized for any particular residence. For example, prior to the alarm clock going off, comfort settings can be altered. If an HVAC zoning system is in place, the comfort settings can be adjusted in bedrooms and bathrooms first. Wake-up mode then increases the setting for the hot water heater, turns on the coffee pot, and  
10 adjusts other home systems in preparation for a family getting out of bed. A typical wake-up schedule would include: determine wake-up time based on day and weather, increase hot water temperature, increase temperature in bathrooms, shut off electric blankets, turn on the coffee pot, ramp up lights to simulate sunrise, activate wake-up alarm, turn on televisions for news, adjust comfort control for whole house. This list is  
15 exemplary and not comprehensive as any particular residence has a unique sequence of events. Other features can be programmed into the mode as desired by either the user or the service provider.

Custom modes also may be provided these modes may be programmed by the user, downloaded from a service provider over the Internet, or field programmed by a  
20 service provider technician on site.

There are a number of hidden modes that are invoked by features within the home manager. An example of a hidden mode is the fire mode. If a fire is detected by the security system, lights are adjusted to aid exit, doors are unlocked, gas to the house is shut off, the HVAC systems are shut down, and emergency numbers are called. Other hidden  
25 modes include: distress (robbery), medical emergency, and appliance failure.

Architecturally, each device connected to the BC system subscribes to the various features offered in the house manager modes through priority blocks. Each feature responding to a mode has an associated priority setting, for example, a security feature responding to a fire mode has a higher priority level than a bedtime mode setting. Fig. 12  
30 shows the relative positioning of the modes, the various features running on the system, the prioritization of each feature, and control of the field device. Features shown as custom may require additional programming to interface to the home management software.

Each feature also has an associated set of software functionality based on the hardware components available. The BC system automatically functions as described once the hardware is recognized by the BC system.

Enhanced security beyond that provided by a conventional security system is provided by the home manager. The enhanced security feature may supplement a conventional security system present in the home that is connected to the control server 100. Settings available in the enhanced security system include: armed/away mode, armed/stay mode, un-armed, system fault, medical emergency, police emergency, and fire emergency.

The settings for the security system relate to home manager modes in the following way. Both vacation mode and away mode invoke the away setting in the security panel. Both the armed/home and un-armed settings relate to the stay mode for the home manager. Although the armed/home setting does not relate directly to a specific mode, it can be set either by the existing security system or by the home manager on an individual basis.

The home manager can set or receive any of the armed/un-armed modes either locally or from a remote location (e.g., through a remote user or security service provider). Behavior of each of these sub-systems is described below.

#### Gas Shut-off Valve

In the fire emergency mode, the gas shut-off valve shuts-off the main gas supply to the house. This feature can be applied to any form of flammable fuel, such as natural gas, heating oil, or propane. In all other modes, the shut-off valve is in the normal state.

#### Water Shut-off Valve

In all modes, the shut-off valve is in the normal state.

#### Lighting Interface

In the armed/away setting, the lighting interface can be set to a pre-defined state. The predefined state can include setting individual lights on and off at prescribed times to simulated occupancy. To configure simulated occupancy, the lights are monitored for a period of one week, or as desired by the user. The light activity during this time is recorded by the control server 100 and captured according to a homeowner prompt to copy the activity. After the activity has been stored in the control server database, mode

the lights behave as they did during the recorded period whenever the security feature is placed in the away armed.

In the fire emergency mode, perimeter (outside) lights are set to flash at a 50% duty cycle with a 1 second cycle time to attract attention to the home. In addition, lights designated as exit lights are set to a level prescribed by the homeowner. During system configuration, lights are defined as exit lights, perimeter lights, or normal lights. In this way, the homeowner can establish an escape route using the lighting. All other lights are shut off.

In all other modes the lights are set in their normal state.

#### Door Locks

Doors are locked in the armed/away mode, and are unlocked in the medical emergency mode and the fire emergency mode. In all other modes, the door locks are in the normal state.

#### HVAC Interface

The HVAC interface can include communications to a sophisticated whole house HVAC zoning system or simply a connection to a programmable communicating thermostat. In the fire emergency mode, the HVAC system is shut down to prevent smoke from being distributed throughout the house. In all other modes, the HVAC system is in the normal state.

#### Health Monitoring

In the medical emergency mode, any health monitoring equipment that is connected to a person on a routine basis can be activated (if it isn't already). In all other modes, the monitoring equipment is in the normal state.

#### Child Detection

In the armed/stay mode, if a child is alone in the house, all cook tops are disabled from use without a password to unlock them. In the fire emergency mode, a security company is notified that a child is in the house. In all other modes, the child detection is in the normal state.

### Elder Tracking

In the medical emergency mode, the security company will be notified that a elderly or disabled person is in the house. In the fire emergency mode a security company is notified that an elderly or disabled person is in the house. In all other modes,  
5 the elder tracking is in the normal state.

### Security Cameras

Security cameras are accessible remotely by the BC system. The control server  
100 captures a camera image and digitizes it for local display or for access from a remote  
10 browser. Data compression can be used to save memory space. In the police emergency mode, the security cameras are automatically set to record on a suitable recording device, such as a VCR, if available. In all other modes, the security cameras are in the normal state.

### AVCast

In the fire emergency mode, all television sets in the house are set to the control server TV channel. The control server displays the message "FIRE" on the television screens. If a location of the fire is known, that location is also placed on the screen, for example, "FIRE - basement". In all other modes, the AVCast system is in the normal  
20 state.

### Away Mode Monitoring

Away mode monitoring is not to be confused with the Armed/Away mode described in the enhanced security section. Away mode monitoring relates to the ability  
25 to monitor or control the home while away. The home manager supports a number of different hardware methods for this task including a high-speed broadband connection as well as telephone dial-up. In either case, the control server 100 provides firewall protection against unauthorized access. Away mode monitoring is also supported by web enabled phones or phones with a mini-browser capability. Any device with a browser can  
30 be used to access the home manager to control or monitor any aspect in the home.

### Appliance Maintenance

Appliance maintenance allows for remote access of appliances within the home. Appliances can include, for example, any kitchen or laundry appliance, water heater,

HVAC system, lighting, audio/visual, sprinkler, or comfort control. Connectivity to each appliance is provided by a telephone modem or a broadband connection to the control server, or the like. The control server 100 acts as the interface to the appliances and serves as a firewall to prevent unwanted tampering. All appliance control functions available within the home are allowed from outside of the home provided that the user is authorized to do so. In the event that a catastrophic failure is detected, a service provider can shut-off gas or water to the house to prevent an explosion or water damage.

Some appliances are capable of a certain amount of self-diagnosis, such as detecting a clogged filter. Under these conditions, the appliances can prompt the user to initiate repairs by displaying a message on a local user interface. In other instances, the appliance must be diagnosed either remotely or by a service provider on site. The control server's role in appliance diagnosis is to provide access to data by a remote site and to provide any necessary service prompts locally. The service provider may shut off the appliance if continued operation would damage the appliance.

#### Enhanced Comfort

Enhanced comfort control involves any aspect of home automation that automatically improves personal comfort. A number of devices, when connected to the control server 100, can be incorporated into the enhanced comfort feature. Examples of such devices include HVAC control, programmable thermostats, a zone control system, ceiling fans, air filtering, humidity control, and automatic blinds.

HVAC control encompasses the broadest aspect of comfort control. HVAC control also can be impacted by an energy management or an enhanced security feature, if available. Programmable communicating thermostats provide the greatest impact on the ability to manage comfort in the home. Fundamentally, the home manager communicates with the thermostat and allows the homeowner to program and configure the thermostat. In addition, other features within the home manager are able to override or alter the actions of the thermostat if needed, for example, when the enhanced security system shuts down the air-blower in case of a fire. Under the energy management feature, the thermostat setting can be adjusted to shed load during high tariff conditions or when the home is unoccupied.

Zoning control is a feature that can provide benefit to virtually every home. There are always instances where one area of the home is hotter or colder than another area. A zoning system uses temperature sensors and variable dampers to adjust the temperature of



each zone independently. The home manager supports two forms of zoning: hardwired and wireless.

5 A hardwired zoning system involves dampers installed inside ductwork communicating to the control server through a central HVAC zoning package, or directly through PLC communications. Similarly, the temperature sensors are connected to the control server 100 either through PLC or through the zoning package.

In the case of a wireless zoning system, RF communications are used to communicate to all temperature sensors and dampers. In this instance, the retrofit damper described above can be incorporated.

10 Main HVAC control can be provided through direct connection from the control server 100 to the HVAC zone controller unit 133 or to a communicating thermostat, which in turn controls the packaged unit. If the control server 100 is taken off-line for some reason, the HVAC zone controller 133 or communicating thermostat can revert to a conventional operation mode.

15 Other devices, such as, for example, ceiling fans, humidifier/de-humidifiers, air filters, adjustable skylights, and automatic blinds can respond to an algorithm for comfort control implemented in the HVAC controller 110 or the control server 100.

#### Energy Savings

20 The primary method for achieving energy savings is to reduce settings or turn off large energy consuming appliances during non-critical times or peak tariff times. The away mode controlled by the home manager system can lower thermostats, reduce temperature of the hot water heater, coordinate HVAC and appliances based on peak tariff conditions by adjusting thermostats to appropriate extremes of the comfort zone, restricting use of appliances to off-peak times, using automatic blinds and skylights to  
25 reduce HVAC demand, and synchronizing HVAC and hot water heater control with the sleep mode by cutting back temperatures during sleep time and bringing them back up as part of the wake-up cycle.

### Family Manager

The family manager can be used in conjunction with the away mode monitoring to allow family members to connect to the system remotely. The family manager manages family data and automates certain tasks, such as, for example, maintaining the family calendar, maintaining a family address book, maintaining a family task list with alarms and reminders, and providing a kitchen/laundry assistant. The family manager is capable of being sorted and searched in a variety of different ways. A family member can access the entire family task list or just the member's personal tasks.

The family calendar contains events of the following profiles: single time events, periodic events (weekly, monthly, yearly), and alarmed events. Events can be assigned to one or more family members and carry details such as start time, end time, and priority. The family address book is segmented by family member and has annotations for entries related to, for example, family, business associates, service providers, theaters, and shops. Closely associated with the calendar is the task list. Tasks are assigned a degree of importance, time needed for completion, and family member assigned to the task.

The kitchen and laundry assistant centers around maintaining an inventory of products in the home such as food and laundry supplies. The assistant maintains shopping lists and supports e-grocery and e-commerce. A method for scanning products, such as barcode or RF ID, is supported to introduce new products into inventory and remove them when discarded. Discarding or use of an item can automatically prompt e-commerce services for re-stocking. The kitchen assistant focuses on meal preparation by recommending recipes or compliments based on products in inventory. The kitchen assistant also supports recipe instructions accessed from Internet sites. A screen shot of the cooking assistant is shown in Fig. 14.

### Home Automation

The home automation feature consists of a variety of modes that can be invoked from the stay mode, the bedtime mode, or the sleep mode. This feature consists of settings for groups of devices associated with certain activities. There are a number of default modes plus a set of user defined modes provided by this feature referred to as activity modes. Default activity modes include: television, reading, dinner, formal dinner, and party. The homeowner can add activity modes, such as, for example, gaming, for playing cards, or night swim, to turn on back yard lights.

**BC SYSTEMS****Meter Network**

The meter network and its link to the control server is explained with reference to  
5 Fig. 15. Water meter 1510 and heat meters (1520,1530) are connected with a bus 1501  
output that allows the meters to be networked via Cat5 cable to a bus master unit 1500.  
The bus master unit 1500 converts the bus signals to a format readable by the control  
server 100. The electricity meter 1540 has a pulse output that requires an additional bus  
coupler 1510. The bus coupler 1510 accumulates the pulses and allows connection to the  
10 bus 1501. Each coupler has pulse inputs for up to 4 meters. The bus 1501 has an open  
protocol such that any product that conforms to bus standards can be connected to the  
network.

Ideally the bus master unit 1500 is located in the same position within the house  
as the control server 100 and connects to the control server 100 through one of the control  
15 server's RS-232 ports.

The control server 100 allows each meter to be read by an authorised external data  
collection service. As a result, a wide variety of monitoring services can be offered, such  
as, for example, data collection, data analysis, and payment. Such services benefit the  
end-user through improved visibility of energy usage leading to better energy  
20 management. The home manager software can display energy consumption data and  
trends and to give tips for reducing consumption.

Energy DataVision (EDV) is an online data display package that enables energy  
users to monitor energy usage patterns via the web. IMServ's data collection service arm  
remotely interrogates metres to access meter reads. Each meter has an identification  
25 number assigned to it. The monitoring services is given an access code to log into the  
control server 100 and use the EDV system to create a variety of reports regarding energy  
usage for the building. EDV can graph usage trends from month-to-month, day-to-day,  
date-to-date, hour-to-hour. An example of an EDV screen shot is shown in Fig. 16.

Commercial diagnosis analysis is shown in Fig. 17.

30

**Central Locking and Door Access System**

The central locking system, shown in Fig. 18, includes an RF key fob 1040, a  
receiver 1810, a motorized door bolt, and sensors to detect an open/closed door, door bolt  
position, and open/closed windows. A bus coupler 1830 is provided for connection to the

motorized door bolt. The motorized door bolt is activated and deactivated using the key fob 1840. The key fob 1840 transmits a lock signal and an unlock signal to the RF receiver 1810. The RF receiver relays the signals to the control server 100 to control one or more motorized door bolts. The motorized door bolts also can be controlled using  
5 other BC system interfaces, such as, for example, a portable tablet 150 (through control module 120), a PC interface 190, or through the Internet portal 5. A second bus coupler 1820 provides inputs from the window and door sensors to the control server 100 indicating an open/closed state of the doors and windows.

The control server 100 can interface with an existing door access system by using  
10 one of the bus coupler outputs to trigger the door controller (i.e., the opening/closing mechanism). The central locking system allows the user to check that all windows and doors are in the correct position before automatically locking them. The same key fob 1840 can be used with the door access system to open the common access door either from inside or outside the building. This reduces the number of keys that need to be used  
15 in any one location.

The key fob technology ensures security by appropriate coding. More than one key fob can be accommodated to allow each family member to have his or her own key. On activating the close function from the key fob, the control server 100 checks that all doors and windows connected to the system are closed. A warning is given (e.g., by  
20 continually flashing the door/hall lights) if the all sensors do not detect a closed position. If all doors and windows are closed, the system activates the locks. After the locks have been activated another check is performed and if all doors have successfully locked and indication is given (e.g., flashing the door/hall light once).

In the event of a power failure, the doors remain secure but in the event of a fire or  
25 other emergency they are easily opened from the inside and do not impede an escape route.

The home manager software for the control server 100 can include the central locking features.

### 30 House Security System

A home security network is shown in Fig. 19. The required sensors can be hardwired to an existing electronic security system 1900. The existing security system 1900 is linked into the control server 100 through a serial link 1901. Alternatively, RF controlled motion detectors 1900 and smoke detectors 1920 can send signals to the

control server 100 for analysis. The control server 100 provides telephone connection and web services that are need for the security system. The status of the security system can be monitored by a remote server using the Internet portal 5, dedicated ISDN, DSL, or POTS service, or any of the home interfaces, such as portable tablet 150 or PC interface 190.

The existing network can be extended by adding the sensors to the appropriate LAN. In this case, the home manager software can be customized to provide specific system features tailored to the location. The security system using the control server 100 can perform all standard functions such as intruder alarm (through door and window switches or motion detectors) and alarm generation (either locally or remotely).

### Lighting System

A lighting network for use with the BC system is shown in Fig. 20. The lighting network comprises a lighting system LAN 2000. A number of bus couplers are connected to the lighting system LAN 2000. Each bus coupler is directly wired to a number of lamps, switches, or sensors. For example, bus couplers 2030 and 2040 are each dedicated to a lamp group, bus coupler 2020 receives signals from a number of switches, and bus couple 2010 receives inputs from sensors (e.g., motion and sun detectors). The bus couplers can be mounted in an electrical distribution box with the loads and inputs connected through a conventional mains cable.

The lighting system LAN 2000 can be implemented using an EIB or other LAN. The EIB LAN uses a bus converter to connect the LAN to the control server 100 using an available RS-232 port of the control server 100. The lighting network can operate even if the control server 100 has a failure. However, interaction with other systems, such as central locking or security, would not be available. A networked lighting system offers flexibility that allows the relationship between switch and lamp be changed simply by re-configuring the system. In addition, lamps, switches, and sensors attached to the lighting LAN 2000 can be shared and controlled by other systems connected to the control server 100. For example, the central locking system can put the house into standby mode when closed ensuring that no lights are left on when the house is empty. A light sensor can be used to detect sun rise and sun set so that the control server 100 can control the lights in a way to simulate occupation. Optionally, motion sensors can be used to switch lights off when a room is unoccupied or to switch them on when someone enters.

The lights also can be controlled using any of the BC system interfaces, such as, for example, PC 190, portable tablet 150 or through a remote interface connected through Internet portal 5.

5        Temperature Control System

A temperature control system is shown in Fig. 21. A heating LAN (e.g., an EIB LAN) can be used to control the temperature of rooms and provide zone control. The heating LAN connects the control server 100 to control valves, to room thermostats, and to room displays through a number of bus connectors. Alternatively, the heating LAN  
10 can be controlled by a universal controller 110 or a zone control 133 under supervision of the control server 100 (as described in the next section). As shown in Fig. 21, the control server 10 communicates with room thermostats through the heating LAN while bus couplers drive on/off valves, proportional valves, and dampers. Alternatively, RF controlled dampers and thermostats can be used as described above with regard to Figs.  
15 9-11.

Linking the heating LAN to the control server 100 gives access to the other systems so that, for example, the central locking system could put the heating system into standby mode when the house is locked. The window sensors used either by a central locking system or a security system can be used by the heating system to turn off room  
20 radiators when a window in the corresponding room is open for longer than a certain period of time.

A network of thermostats and valves allows a comprehensive software user interface offered by the home manager to effectuate zone and profile control.

25        Zone and Profile Temperature Control System

The universal controller 110 offers a very flexible temperature control system that can be linked to the control server 100. An LCD touch-pad 112 gives the user access to the system for changing temperatures, times, and other system management functions. The universal controller 110 is designed for mounting in an electrical distribution box.  
30 The box can be placed adjacent to the control server 100 or close to the valve/damper array for the heating system. The universal controller 110 links to the control server 100 using an RS-485 network interface.

The control panel 112 is wall mounted and connects to the universal controller through three sets of twisted-pair wires. Each universal controller 110 has up to 16

configurable analogue/digital inputs and twelve configurable relays output pairs. To add additional inputs and outputs a second universal controller 110 can be networked into the system. Up to three control panels can be placed at different positions around the home. An additional power supply allows two more control panels to be added if desired.

5        Once installed, the universal controller 110 needs to be configured. Configuration should be carried out by trained personnel using a PC running configuration software. The temperature control system allows up to 16 zones for either heating or cooling systems or 10 zones for combined heating and cooling. For example, each room in the house could be configured as a single zone. A temperature sensor in each room allows  
10    the user to set the required temperature and control the temperature controlling a valve/register to the room radiator feed or air damper. For combined heating and cooling systems, a valve is added to control the fan coil feed.

Each zone is programmed with a profile of temperatures by day of the week and time of day. As a result, only those rooms, which are normally occupied at particular  
15    times or days need be heated or cooled. The control panel 112 allows the user to override these profiles at a given time. The profiles can also be over-ridden by the control server 100 so that, for example, the heating system can be turned down if the central locking system reports that the house is locked and unoccupied. An outside air temperature sensor can be added to allow improved temperature control algorithms that  
20    account for ambient weather and temperature conditions.

The universal controller 110 can interface directly with a fire alarm system or individual smoke detectors allowing the universal controller to close all dampers and turn of the boiler and air circulating fan upon detection of a fire.

A wide variety of other sensors can be added to complement the functions offered  
25    by the system. For example, CO, CO2, flammable gas sensors could also be incorporated for home safety.

The universal controller 110 has a monitor function that allows current status of all connected devices to be viewed. The monitor function can be made available to the control server 100 and to any user interface (e.g., 150 or 190) connected to the control  
30    server 100, including a telephone connection. The home manager software can deliver a java file that is displayed using browser software on a local PC 190, or over a remote connection using Internet portal 5. An example of a screen shot for control of the HVAC is shown in Fig. 23.

### Networked Appliances

An appliance network is shown in Fig. 24. The networked appliances can communicate with the control server 100 using PLC LAN 3. An appliance is networked simply by plugging the appliance into the wall outlet connecting the appliance to the control server 100 through the PLC network. As a result, no additional wiring or re-

configuring is necessary each time an appliance is installed or reconfigured. Connecting appliances to the control server 100 provides a number of benefits due to the sharing of data with other networked devices and the connection to external service monitoring companies through a phone line or Internet connection.

The home manager software is able to display virtual control panels for each appliance as shown in Fig. 25. As a result, the appliance can be controlled remotely under the supervision and monitoring of a portable web pad 150 within the home, or from a remote location using the Internet portal 5. When combined with the AvCast option, the home manager pages can be displayed on the TV screens in the home. As a result, during advertisements, for example the user can switch to the oven channel to see how the roast is doing. The appliance's virtual control panel has the same appearance as the physical controls panel on the appliance.

Service companies can offer remote monitoring facilities to reduce the cost of repairs enabling them to offer extended warranty coverage for all such connected appliances.

### ***INTERACTIVE MARKETING***

According to another aspect of the BC system, users' actions may be monitored in order to provide better service to the users of the BC system. The BC system allows consumer and commercial marketing companies, for example, to understand what the users are doing in their homes at all times. An advantage of using the BC system to monitor consumer activity, is that the user is not required to fill out surveys, report data manually, or otherwise change patterns of daily behavior in order to permit the collection of data. In addition, the BC system allows diagnostic information to be gathered to improve operation of system components and build infrastructure systems within the premises.

Through use of the control server, communication modules, and monitoring components, such as a smart module or retrofit plug, data can be sent using the Internet portal, to service provider for monitoring and analysis. Using the diagnostic components



of the system, the monitoring company can monitor use of appliances, systems, and components within the home to determine exactly what activities are being performed by each appliance, including the exact time the appliances were used and the duration of the use. For example, a networked washer and dryer can be monitored by a service provider  
5 to determine what cycle the washer is in. When the cycle is finished the washer display or user interface, for example portable tablet can display a coupon for detergent, fabric softener, or anti-static dryer towels. If the appliance malfunctions, the control server can turn off the appliance before permanent harm is done and send a message to the user service provider that repair is required. In response, the service provider can supply  
10 instruction to the user for simple repairs that do not require a technician's assistance. In addition, merchants can monitor the appliance's usage in order to provide better warranties that are based on the specific customer's actual usage.

RF tags can be used to improve appliance performance. For example, RF tags can be included in clothing so that the appliance informs the user when clothes do not match  
15 the selected cycle. Coupons or and advertisement can be displayed for the type of clothes washed. For example, if delicates are being washed, a coupon for Woolite can be displayed. The advantage of the BC system over prior couponing systems is that the coupons can be displayed to the user when the user can take advantage of the coupon. Additionally, food RF tags can be monitored by control server to remind the user that  
20 certain food items are running low or are soon to expire or should be disposed of. At the same time, coupons can be sent and displayed to user of those items. Alternatively, a shopping list can be automatically generated and sent to a shopping delivery service so that the user does not even have to order or shop for designated items.

**TV CHANNEL RECORDER**

Techniques may be used to map the time of programming watched to identify exactly what the television was tuned to at any particular time. Because of the ability to catalog time and tuning the data logged by the control server 100, market researchers can  
5 determine what was being display based on the channel, location, and time. With this information, market researchers can precisely determined what information was displayed on the TV and determine specific viewing habits of a household. If personal RF tags, key fobs, or remote controls are also used then the control server 100 also can identify who was in the room when the TV was tuned to the channel and determine who was viewing a  
10 program or commercial.

Furthermore, the action of the TV channel recorder can be combined with an Internet activity recorder designed to monitor web surfing habits and PC usage habits. These features allow performance of web usage monitors of a nature substantially the same as the well known TV usage monitoring services, such as, for example, ACNielsen  
15 performs, but without intrusive use of logs or manual methods. It is even possible to link radio monitoring through a suitably adapted radio. The combination of TV monitoring, radio and/or PC usage monitoring, and in-home activity monitoring permits unsurpassed analysis of a household's economic activities. Prior to this, TV, PC, and home activity monitors were applied independently to various homes and statistical methods were used  
20 in an attempt to extrapolate the observed results to all homes of particular econometric groups.

No holistic, whole household view was possible because of the intense intrusion that the manual log methods imposed on a given household. A complete 360° view of household activity is possible (with permission from the household) with the BC system.  
25 The integrated data from the BC system capture all of the media influences being presented in electronic form. As a result, more sophisticated statistical analysis of household response to the media influences presented is permitted. True cause and effect analysis of advertising effectiveness can be performed, which are far superior to current methods.

30 In the final case, store point of sale data from participating local stores or RF tag data from tags attached to purchased goods or bar codes scanned from purchased goods can be used to close the loop on media influence measurement. Goods can be test marketed using various forms of promotion, including electronic and print media known to have been sent to a household, known to have been viewed, surfed or listened by

particular household members engaged in known activities at known times and the resulting effectiveness measured with unparalleled accuracy without the distorted effect of requiring manual logs of activities to be kept by the household participants.

## 5 **RETROFIT REFRIGERATION MONITORING UNIT**

Figs. 26A and 26B show a refrigeration monitoring system. As shown in Fig. 26A, a refrigeration appliance 2600, such as, for example, a refrigerator or freezer, can be retrofit to monitor for food properties, such as, for example, spoilage, and to alert the operator of the refrigeration appliance so that appropriate action can be taken, if  
10 necessary.

A refrigeration appliance 2600 can be retrofitted for monitoring by adding a retrofit plug 2650 (described above) to allow the appliance to communicate with a remotely located computer, such as, for example, a control server 100, a gateway, or a building monitoring service. The retrofit plug 2650 includes an alternative power source,  
15 such as a battery, that allows the plug to operate in the event of a power failure or outage at the location of the refrigeration appliance 2600. An LED indicator can be included on the outside of the retrofit plug 2650 to indicate a battery low condition. The retrofit plug 2650 also can monitor the power level of the battery and signal a monitoring service or user when the battery should be changed.

The refrigeration appliance 2600 includes a compartment 2610, such as, for example, a freezer or a refrigeration compartment. A sensor 2620 can be included or retrofitted to the refrigeration appliance 2600. The sensor 2620 can be retrofitted by drilling a hole in the appliance 2600 to allow placement of the sensor 2620, such as a thermistor or another temperature-sensing device, inside the compartment 2610. A  
25 special seal or ring (sized to the hole and including insulation characteristics) can be inserted in the hole to act as an anchor for the sensor 2620. A cable or interface connection 2621 couples the sensor 2620 to the retrofit plug 2650. The retrofit plug 2650 includes a serial or other port to accept the interface connection 2621. The sensor 2620 provides data on the sensed condition within the compartment 2610, for example,  
30 temperature, to allow the retrofit plug 2650 to monitor conditions within the refrigeration appliance 2600.

The retrofit plug 2650 can process the sensed condition and perform analysis of the data. In one example, the plug can be programmed to calculate the speed at which

temperature is rising in the appliance to determine how long it will be until food spoilage occurs. This information can then be provided to a user or monitoring service so that appropriate action can be taken. Alternatively, the sensed data can be sent to a control server 100, a gateway, or a monitoring service to perform the analysis function.

- 5 Temperature measurements can be taken in real time or at intervals designated by the user.

The retrofit plug 2650 can be installed by connecting the retrofit plug 2650 to the main power supply 2640 of the appliance controller 2630. During normal operation, the retrofit plug 2650 can use PLC communication to provide data about the refrigeration  
10 appliance. Alternatively, other communications interfaces can be used. The retrofit plug 2650 also may include a communications circuit implemented by a modem or a RF communication device. In the case of a modem, a phone jack and a communications port 2655 are provided as shown in Fig. 26B. In the event of a power failure, the retrofit plug 2650 can alert a user or monitoring service that power is out. The retrofit plug 2650 also  
15 may dial a repair service if it is determined that there is a malfunction within the refrigeration appliance 2600. The retrofit plug also monitors the temperature within compartment 2610 and can provide an estimation of how long until food spoilage occurs. The estimate can be updated if sensed conditions within the compartment 2610 change. The retrofit plug 2650 also can perform other analyses. For example, if it is determined  
20 that the compressor is on longer than expected, combined with a rising temperature in the compartment, the retrofit plug may determine that a door open condition has occurred and may provide a message to the user or monitoring service of the open door condition.

Even if power is not lost, if the compartment 2610 reaches a predetermined temperature, the retrofit plug 2650 may perform certain actions. For example, the retrofit  
25 plug 2650 may call using the modem, or transmit using the RF device, a monitoring service, the operator of the device, or a controller, such as a control server, to indicate that food spoilage is immanent or how long until spoilage will occur. Alternatively, a repair service can be contacted to fix the problem associated with the refrigeration appliance. The retrofit plug itself, as described above, can supply diagnostic data to aid in repair of  
30 the appliance, if necessary. In this way, food can be monitored and spoilage prevented to save an operator the cost of replacing the food. In addition, liability issues can be reduced by keeping records that although power was lost, or the refrigeration appliance malfunctioned, food temperature was maintained at an adequate level such that spoilage

did not occur. The retrofit plug 2650 may simply provide the temperature or other power monitoring data to a control server, gateway, or monitoring service, which can perform analysis of the data and determine if any action is necessary. For example, if used in conjunction with the control server 100, a message can be displayed on a user interface  
5 that the freezer is not working, the door has been left open, or that a repair service should be called.

As shown in Fig. 27A, in place of a retrofit a plug, a box 2700 can attach to the outside of refrigeration appliance 2600 (or the compartment 2610). According to one implementation, the unit 2700 can be implemented using a communications module  
10 (described above). In the implementation shown in Fig. 27A, a hole is cut and the unit with sensor 2705 is inserted into the hole. A suitable seal is provided to ensure adequate refrigeration is maintained. The unit 2700 can use the seal to seat itself on the refrigeration appliance 2600. Other means of fastening, such as, for example, adhesive, bolts, or screws also can be used. The seal may be inserted in the hole or be provided as  
15 part of the unit 2700 and sensor 2705.

The unit 2700 attaches to a power line 2601 to provide power to all components of the unit 2700. In addition, a back-up power source 2710, such as, for example, a battery is included to provide power in case of main power loss or outage. An external LED or some other indicator may be provided on the unit 2700 to alert the operator of a low  
20 battery condition.

A small processor or monitoring circuit 2720 monitors temperature inside the refrigeration appliance 2600. The monitor circuit 2720 is connected with a communications circuit 2730. The communications circuit 2730 can be implemented using, for example, a wireless transceiver, a wireless transmitter, or a modem. The  
25 communications circuit 2730 can include a phone jack for connection to a phone line 2735, if a modem is used. In the case of a temperature event, the unit 2700 is programmed (by external device such as a key pad with an interface, through the modem, or by insertion of a memory chip, such as a flash memory) with a number to call to alert an operator or monitoring company of the temperature or condition within the appliance,  
30 indicating that food spoilage will occur without intervention. Alternatively, if a wireless communication device is used, a message could be sent to a gateway, a control server, or a communication link to alert a user or monitoring service of the temperature event. The monitoring circuit 2730 also can be programmed to perform all of the monitoring function and analysis that is provided by the retrofit plug or communications module.

The sensor 2705 and unit 2700 also can be implemented as separate units connected by a cord or other interface 2704 as shown in Fig. 27B. The unit 2700 can be mounted on the refrigeration appliance 2600 using an adhesive or using a form of attachment, such as, for example, screws, bolts, or other means of fastening.

5           A number of implementations have been described. Nevertheless, it will be understood that various modifications may be made. For example, advantageous results still could be achieved if steps of the disclosed techniques were performed in a different order and/or if components in the disclosed systems were combined in a different manner and/or replaced or supplemented by other components. Accordingly, other  
10       implementations are within the scope of the following claims.

What is claimed is:

1. A device for monitoring an appliance that receives power from a power source, the device comprising:
- a first coupler that couples the device to the power source;
  - a second coupler that couples the device to the appliance;
  - 5 a monitoring circuit connected between the first coupler and the second coupler to monitor power supplied by the source to the appliance; and
  - a communications circuit connected to the monitoring circuit,
- wherein the monitoring circuit provides data based on the monitored power to the communications circuit.
- 10
2. The device of claim 1 wherein the communications circuit includes a receiver that receives a signal from the first coupler to control the monitoring circuit.
3. The device of claim 1 wherein the communications circuit includes a transceiver
- 15 that receives a signal from the first coupler to control the monitoring circuit and to transmit monitored power data.
4. The device of claim 1 wherein the communications circuit comprises a power line carrier transceiver and a power line driver coupled to the monitoring circuitry and the first
- 20 coupler.
5. The device of claim 1 wherein the monitoring circuit measures current drawn by the appliance.
- 25
6. The device of claim 5 wherein the monitoring circuit includes a processor, that determines an operating state of the appliance based on the measured current.
7. The device of claim 5 wherein the monitoring circuit includes a memory that stores the measured current and periodically sends measured current data to the first
- 30 coupler.
8. The device of claim 5 wherein the monitoring circuit includes a memory that stores an electronic signature and a processor that determines an operating state of the appliance based on the electronic signature.

9. The device of claim 8 wherein the processor determines an operating state of the appliance and transmits the determined state to the first coupler.
- 5 10. The device of claim 1 further comprising a modem connected to the monitoring circuit for transmitting data based on the measured current.
11. The device of claim 1 further comprising a radio frequency transmitter connected to the monitoring circuit for transmitting data based on the measured current.
- 10 12. The device of claim 1 further comprising a serial port connected to the monitoring circuit to receive data about the appliance.
13. The device of claim 1 further comprising a battery, wherein the monitoring circuit  
15 receives power from the first coupler and the battery supplies power to the monitoring circuit when power is not received by the first coupler.
14. The device of claim 2 further comprising a switch connected to the first coupler wherein the switch is opened in response to the control signal to prevent power from the  
20 source from being supplied to the appliance.
15. The device of claim 2 further comprising a switch connected to the first coupler to adjust the amount of power received by the appliance in response to the control signal.
- 25 16. The device of claim 1 wherein the first coupler comprises a first pin for connection to a live line and a second pin for connection to a neutral line.
17. The device of claim 16 further comprising a first power line and a second power line connecting the first and second couplers, wherein the second coupler includes a first  
30 slot connected to the first pin through the first power line and a second slot connected to the second pin through the second power line.
18. A system for monitoring an appliance that receives power from a source, the system comprising:



a power line connected to the source;  
a circuit connected to the power line and the appliance to monitor power supplied to the appliance; and  
a processor connected to the power line,  
5 wherein the circuit sends a signal to the processor through the power line and the signal is based on the power supplied to the appliance.

19. The system of claim 18 wherein the circuit comprises:  
a first coupler that couples the circuit to the power line;  
10 a second coupler that couples the circuit to the appliance;  
a monitoring circuit connected to the first coupler and the second coupler to monitor power supplied by the source to the appliance; and  
a communications circuit connected to the monitoring circuit,  
wherein the monitoring circuit provides data based on the monitored power to the  
15 communications circuit for output to the first coupler.

20. The system of claim 19 wherein the circuit comprises a plug and the first coupler comprises a first pin for connection to a live line and a second pin for connection to a neutral line.

20  
21. The system of claim 20 wherein the monitoring circuit further comprises a first power line and a second power line connecting the first and second couplers, and the second coupler comprises a first and second slot, with the first slot connected to the first pin through the first power line and the second slot connected to the second pin through  
25 the second power line.

22. The system of claim 18 wherein the processor receives signals transmitted on the power line from the circuit and determines a state of operation of the appliance based on the signals.

30  
23. The system of claim 18 wherein the circuit includes a receiver for receiving signals sent from the processor on the power line.

24. The system of claim 23 wherein the appliance's operating state is controlled based on the signals sent to the circuit from the processor.

25. The system of claim 22 further comprising a connection to a service provider, wherein the processor comprises a control server, that sends signals to the service provider about the operation of the appliance.

26. The system of claim 22 further comprising a connection to remote service provider, wherein the processor comprises a gateway, that sends signals to the service provider about the operation of the appliance.

27. The system of claim 22 wherein the processor diagnoses the signals to determine if an appliance service.

28. The system of claim 27 further comprising a display wherein the processor sends a message to the display alerting a user if the appliance needs service.

29. A device for monitoring an appliance that receives power from a source, the device comprising:

first means for coupling the device to the power source;

second means for coupling the device to the appliance;

means for monitoring power supplied to the appliance; and

means for communicating data based on the monitored power received from the monitoring means,

wherein the monitoring means provides the data to the communications means for output to the first coupling means.

30. The device of claim 29 wherein the communications means includes a receiver that receives a signal from the first coupling means to control the monitoring means.

31. The device of claim 29 wherein the communications means includes a transceiver that receives a signal from the first coupling means to control the monitoring means and to transmit monitored power data.

32. The device of claim 29 wherein the monitoring means measures current drawn by the appliance.
33. The device of claim 29 wherein the monitoring means determines power used by the appliance.
34. The device of claim 29 wherein the monitoring means determines an operating state of the appliance based on the power used by the appliance.
35. The device of claim 29 further comprising a means for switching connected to the first coupler to open in response to the control signal to inhibit power from the source from being supplied to the appliance.
36. A retrofit plug adapted to be received by an appliance that receives power from a source, the retrofit plug comprising:
- a live pin;
  - a neutral pin;
  - a first line connected to the live pin;
  - a second line connected to the neutral pin;
  - a first slot, connected to the first line, for receiving a pin from the appliance;
  - a second slot, connected to the second line, for receiving a neutral pin from the appliance;
  - a transformer connected to monitor the first and second lines;
  - a measurement circuit connected to the transformer for measuring current supplied to the appliance; and
  - a power line carrier transceiver for encoding a power line carrier signal based on the measured current.
37. A wireless damper comprising:
- a register;
  - a controller regulating the amount of air flow provided by the register; and
  - a radio frequency communications circuit,
- wherein the radio frequency communications circuit provides a signal to the controller to adjust the amount of air flow provided by the register.

38. The damper of claim 37 further comprising a register regulation mechanism connected between the register and the controller, wherein the regulation mechanism opens and closes the register in response to a signal from the controller to  
5 regulate air flow through the damper.

39. The damper of claim 38 wherein the register regulation mechanism comprises a variable switch which variably adjusts the amount of air flow through the damper.

10

40. The damper of claim 38 wherein the register regulation mechanism comprises a magnetic latch which opens and closes the register.

41. The damper of claim 37 further comprising a battery that supplies power to  
15 the damper.

42. The damper of claim 41 wherein the controller monitors a power level of the battery and sends a signal for transmission by the radio frequency communications circuit when the power level reaches a predetermined amount.

20

43. The damper of claim 41 wherein the controller opens the register if a power level of the battery reaches the predetermined amount.

44. The damper of claim 38 further comprising a battery that supplies power to  
25 the controller, the register regulation mechanism, and the radio frequency communications circuit.

45. The damper of claim 38 further comprising a sensor for determining a condition at the damper.

30

46. The damper of claim 45 wherein the controller adjusts the register regulation mechanism in response to the condition determined by the sensor.

47. The damper of claim 46 wherein the controller receives the determined condition from the sensor and sends a signal with the determined condition to the radio frequency communications device for transmission of the determined condition signal.

5 48. The damper of claim 45 wherein the sensed condition is temperature.

49. The damper of claim 37 wherein the radio frequency communications circuit comprises a radio frequency transceiver.

10 50. The damper of claim 37 wherein the controller includes a processor that sends a signal to the radio frequency communications circuit to identify the damper.

51. The damper of claim 37 wherein the controller includes a processor that determines if a signal received by the radio frequency communications circuit is  
15 addressed to the damper.

52. The damper of claim 51 wherein the controller includes a memory for storing damper identification and the processor determines if a signal is addressed to the damper using the stored damper identification.

20

53. A wireless air flow control system comprising:  
a wireless damper including a battery; and  
a zone controller;  
wherein the zone controller sends a signal to the wireless damper to  
25 control the amount of air flow through the damper.

54. The wireless air flow control system of claim 53 wherein the wireless damper comprises:

a register;  
30 a damper controller regulating the amount of air flow provided by the register; and  
a radio frequency communications circuit,  
wherein the radio frequency communications circuit receives the air flow control signal and the damper controller adjusts the amount of air flow in response to the air flow control signal.

55. The wireless air flow control system of claim 54 further comprising a register regulation mechanism connected between the register and the damper controller, wherein the regulation mechanism opens and closes the register in response to signals  
5 from the damper controller to regulate air flow through the damper.

56. The wireless air flow control system of claim 55 wherein the register regulation mechanism comprises a variable switch that adjusts the amount of air flow through the damper.  
10

57. The wireless air flow control system of claim 55 wherein the register regulation mechanism comprises a magnetic latch that opens and closes the register.

58. The wireless air flow control system of claim 54 wherein the damper  
15 controller monitors a power level of the battery and sends a signal for transmission by the radio frequency communications circuit to the zone controller when the power level reaches a predetermined amount.

59. The wireless air flow control system of claim 58 further comprising a  
20 display on which the zone controller displays a message identifying that the damper's battery power level is low.

60. The wireless air flow control system of claim 58 further comprising a  
25 display on which the zone controller displays a message identifying that the damper's battery needs replacing.

61. The wireless air flow control system of claim 53 further comprising a sensor configured to sense a condition and provides an indication of the condition to the zone controller, wherein the zone controller sends a control signal to the wireless damper  
30 to regulate the air flow based on the sensed condition.

62. The wireless air flow control system of claim 53 further comprising a user interface that provides a signal to the zone controller which controls the damper in response to the signal from the user interface.

63. The wireless air flow control system of claim 62 wherein the user interface comprises a thermostat.

5 64. The wireless air flow control system of claim 62 wherein the user interface comprises a computer.

65. The wireless air flow control system of claim 54 further comprising a control server that controls the zone controller in coordination with other building  
10 functions under control of the control server.

66. The wireless air flow control system of claim 54 further comprising a building air flow generation mechanism wherein the zone controller opens and closes the damper in response to activation and deactivation of the air flow generation mechanism.  
15

67. The wireless air flow control system of claim 54 wherein the damper controller includes a processor wherein the processor sends a signal to zone controller identifying the damper.

20 68. The wireless air flow control system of claim 54 wherein the damper controller includes a processor that determines if a signal received by the radio frequency communications circuit is addressed to the damper.

69. A wireless damper comprising:  
25 a means for regulating air flow;  
a means for controlling the amount of air flow provided by the air flow regulating means; and  
a means for communicating,  
wherein the means for communicating provides a signal to the control means to  
30 adjust the air flow.

70. The damper of claim 69 comprising a means for adjusting the air flow regulation means in response to signals from the control means.

71. The damper of claim 70 wherein the air flow adjusting means comprises a variable switch that adjusts the amount of air flow through the damper.

72. The damper of claim 70 wherein the air flow adjusting means comprises a  
5 magnetic latch, that opens and closes the air flow adjusting means.

73. The damper of claim 69 further comprising a means for supplying power to the damper.

74. The damper of claim 73 wherein the control means monitors a power level  
10 of the power supply means and sends a signal for transmission by the communication means when the power level reaches a predetermined amount.

75. The damper of claim 73 wherein the control means opens the air flow  
15 regulation means if a power level in the power supply means reaches a predetermined amount.

76. The damper of claim 69 comprising a means for sensing a condition at the  
damper.

20 77. The damper of claim 76 wherein the control means adjusts the air flow regulation means in response to the sensed condition.

78. The damper of claim 69 wherein the communications means comprises a  
25 radio frequency transceiver.

79. A refrigeration appliance comprising:  
a compartment,  
a sensor for sensing a condition within the compartment;  
30 a power supply;  
a monitoring circuit connected with the power supply monitoring the sensed condition; and  
a communications circuit,



wherein the monitoring circuit sends a signal through the communication circuit in response to the sensed condition.

80. The appliance of claim 79 wherein the compartment is a freezer.

81. The appliance of claim 79 wherein the sensed condition is temperature.

82. The appliance of claim 79 wherein the monitoring circuit includes a processor that determines when food spoilage will occur based on the sensed condition.

83. The appliance of claim 80 wherein the monitoring circuit sends a signal through the communications circuit indicating when food spoilage will occur.

84. The appliance of claim 80 wherein the monitoring circuit sends a signal through the communications circuit indicating food spoilage has occurred.

85. The appliance of claim 79 further comprising a battery connected to the monitoring circuit, wherein the monitoring circuit monitors power supplied to the appliance, and if power supplied is interrupted, sends a signal using the communications circuit.

86. The appliance of claim 85 wherein the signal indicates that no power is being supplied.

87. The appliance of claim 85 wherein the signal indicates when food spoilage will occur.

88. A retrofit unit for monitoring a refrigeration appliance including a power supply, the unit comprising:

a sensor for sensing a condition within the appliance;

a monitoring circuit connected with the power supply monitoring the sensed condition; and

a communications circuit,

wherein the unit is inserted in the appliance and the monitoring circuit sends a signal through the communication circuit in response to the sensed condition.

89. The retrofit unit of claim 88 wherein the sensed condition is temperature.

5

90. The retrofit unit of claim 88 wherein the monitoring circuit includes a processor that determines when food spoilage will occur based on the sensed condition.

91. The retrofit unit of claim 88 wherein the monitoring circuit sends a signal through the communications circuit indicating when food spoilage will occur.

10

92. The retrofit unit of claim 88 wherein the monitoring circuit sends a signal through the communications circuit indicating food spoilage has occurred.

93. The retrofit unit of claim 88 comprising a battery connected to the monitoring circuit wherein the monitoring circuit monitors power supplied to the appliance and if power supplied is interrupted the monitoring circuit sends a signal using the communications circuit.

15

94. The retrofit unit of claim 93 wherein the signal indicates that no power is being supplied.

20

95. The retrofit unit of claim 93 wherein the signal indicates when food spoilage will occur.

25

96. A retrofit system for monitoring a refrigeration appliance including a power supply, the system comprising:

a sensor for sensing a condition within the appliance;

a monitoring unit connected to the sensor and including:

a monitoring circuit connected with to the sensor to monitor the sensed condition; and

30

a communications circuit,

wherein the sensor is inserted in the appliance and the monitoring circuit sends a signal through the communication circuit in response to the sensed condition.

97. The retrofit system of claim 96 wherein the monitoring unit is mounted on the appliance and attached to the power supply.

5 98. The retrofit system of claim 96 wherein the sensed condition is temperature.

99. The retrofit system of claim 96 wherein the monitoring circuit includes a processor that determines when food spoilage will occur based on the sensed condition.  
10

100. The retrofit system of claim 96 wherein the monitoring circuit sends a signal through the communications circuit to indicate that when food spoilage will occur.

101. The retrofit system of claim 96 wherein the monitoring circuit sends a  
15 signal through the communications circuit to indicate that food spoilage has occurred.

102. The retrofit system of claim 96 comprising a battery connected to the monitoring circuit, wherein the monitoring circuit monitors power supplied to the appliance, and if power supplied is interrupted, sends a signal using the communications  
20 circuit.

103. The retrofit system of claim 102 wherein the signal indicates that no power is being supplied.

25 104. The retrofit system of claim 102 wherein the signal indicates when food spoilage will occur.

105. A retrofit appliance monitoring system comprising:  
an appliance including a power supply;  
30 a retrofit plug attached to the power supply; and  
a sensor connected to the retrofit plug for sensing an appliance condition,  
wherein the retrofit plug generates a signal based on a sensed condition.

106. The retrofit appliance monitoring system of claim 105 further comprising:

a control server; and

a user interface;

wherein the control server displays a message on the interface in response to the signal from the sensor.

5

107 The retrofit appliance monitoring system of claim 106 wherein the sensed condition is temperature and the signal indicates how long until food spoilage occurs.

108. The retrofit appliance monitoring system of claim 107 wherein the sensed  
10 condition is temperature and the signal indicates that power has been lost.

109. A building control system comprising:

appliances;

a communications network connected to the appliances; and

15 a control server connected to the communications network,  
wherein use of the appliances is monitored by the control server.

110. The building control system of claim 109 comprising a retrofit plug  
connected with one of the appliances for monitoring the appliance, wherein the retrofit  
20 plug sends monitored appliance data to the control server.

111. The building control system of claim 109 wherein the communications network is a power line carrier network.

25 112 The building control system of claim 111 wherein the control server includes building manager software that controls the appliances according to a number of modes of operation.

113. The building control system of claim 112 wherein the modes of operation  
30 are one of: a stay mode, a wake-up mode, a bedtime mode, a sleep mode, and a custom mode.

114. The building control system of claim 109 further comprises a video distribution network and display device.

115. The building control system of claim 114 wherein the control server includes a video module providing a video channel for display on the display device wherein the control server displays messages on the control channel.

5

116. The building control system of claim 114 wherein the control server includes a video module providing a video channel for display on the display device.

117. The building control system of claim 109 wherein the display device is a television and the control server records the view channel and time.

10

118. The building control system of claim 117 wherein the recorded data are used to determine what content is being viewed at a particular time.

15

119. The building control system of claim 118 including a radio frequency personal identification device, wherein the control server records the identification in relation to the recorded data to determine who was watching the content.

120. The building control system of claim 119 wherein the control server monitors items purchased and used in the home.

20

121 The building control system of claim 120 further comprising a monitoring service for receiving the monitored item information and the content viewing information to determine effectiveness of marketing advertisements.

25

122. The building control system of claim 109 comprising a radio frequency receiver, wherein the control server monitors items used in the building by reading radio frequency tags attached to the items.

123. The building control system of claim 109 further comprising a display, wherein the control server monitors use of one of the appliances and provides messages in response to the use of an appliance.

30

124. The building control system of claim 123 further comprising a monitoring service that monitors use of the appliances as reported by the control server.

125. The building control system of claim 123 wherein the messages are  
5 coupons for items used in the building.

126. The building control system of claim 109 further comprising a user interface, wherein the user can display a virtual control panel of one the appliances to control the appliance.  
10

127. The building control system of claim 126 wherein the interface is a portable tablet.

128. The building control system of claim 126 wherein the interface is a  
15 computer.

129. The building control system of claim 109 wherein the communications network is a radio frequency network.  
20



2/32

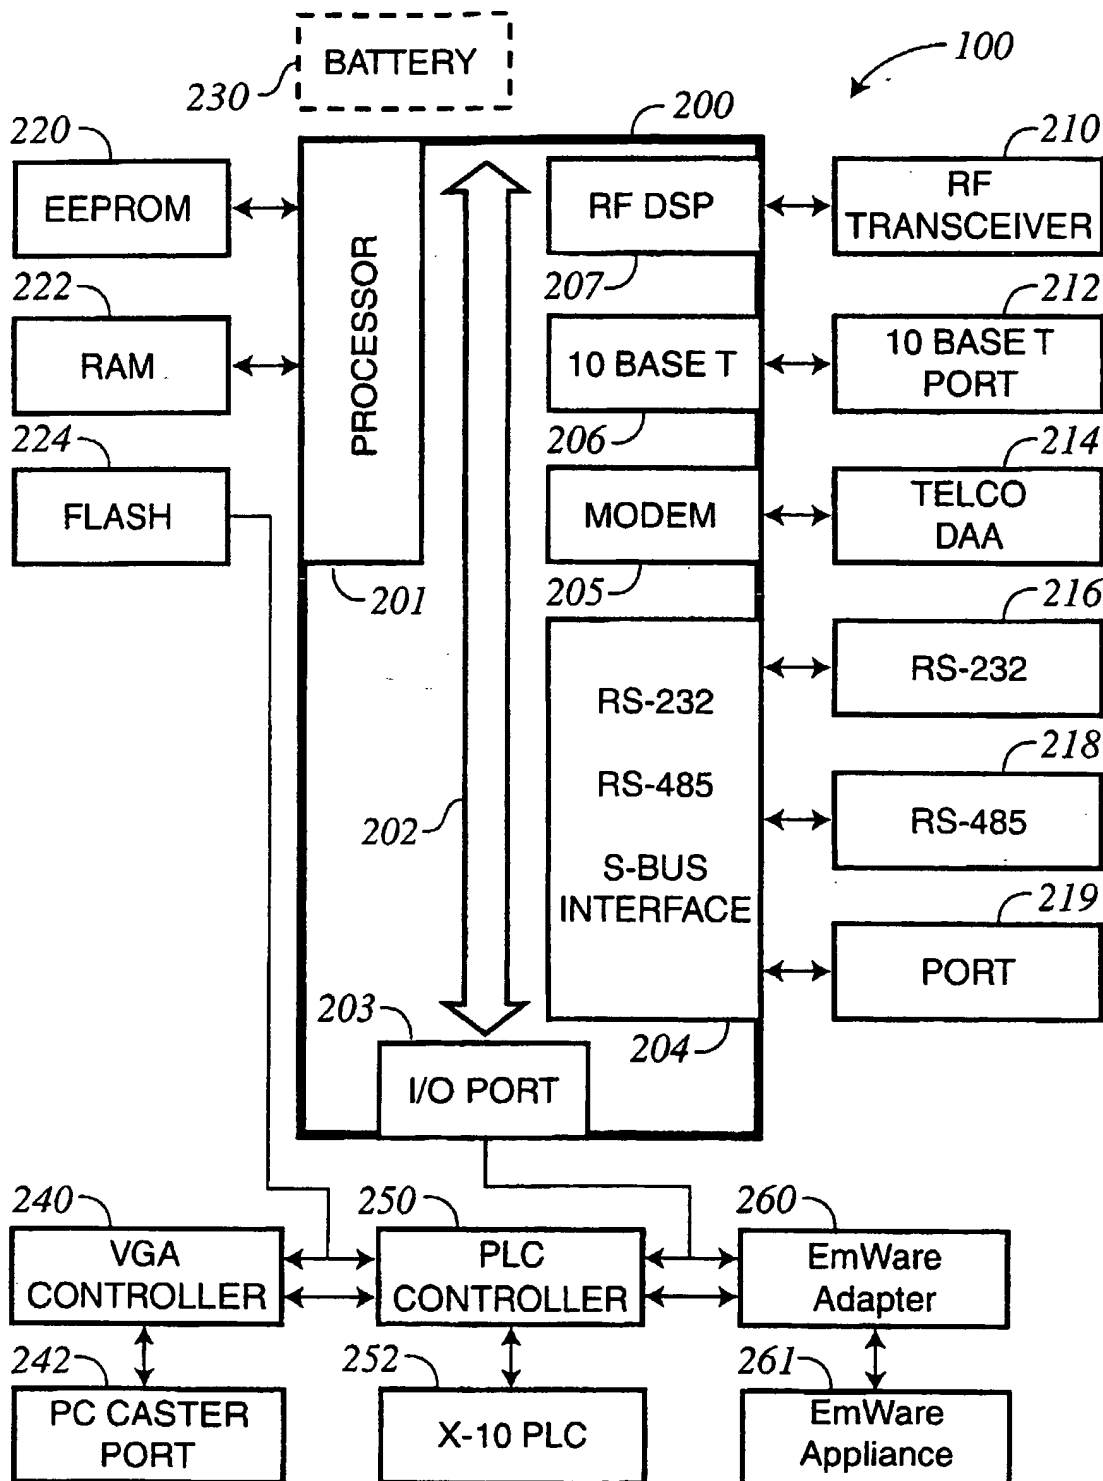


FIG. 2



3/32

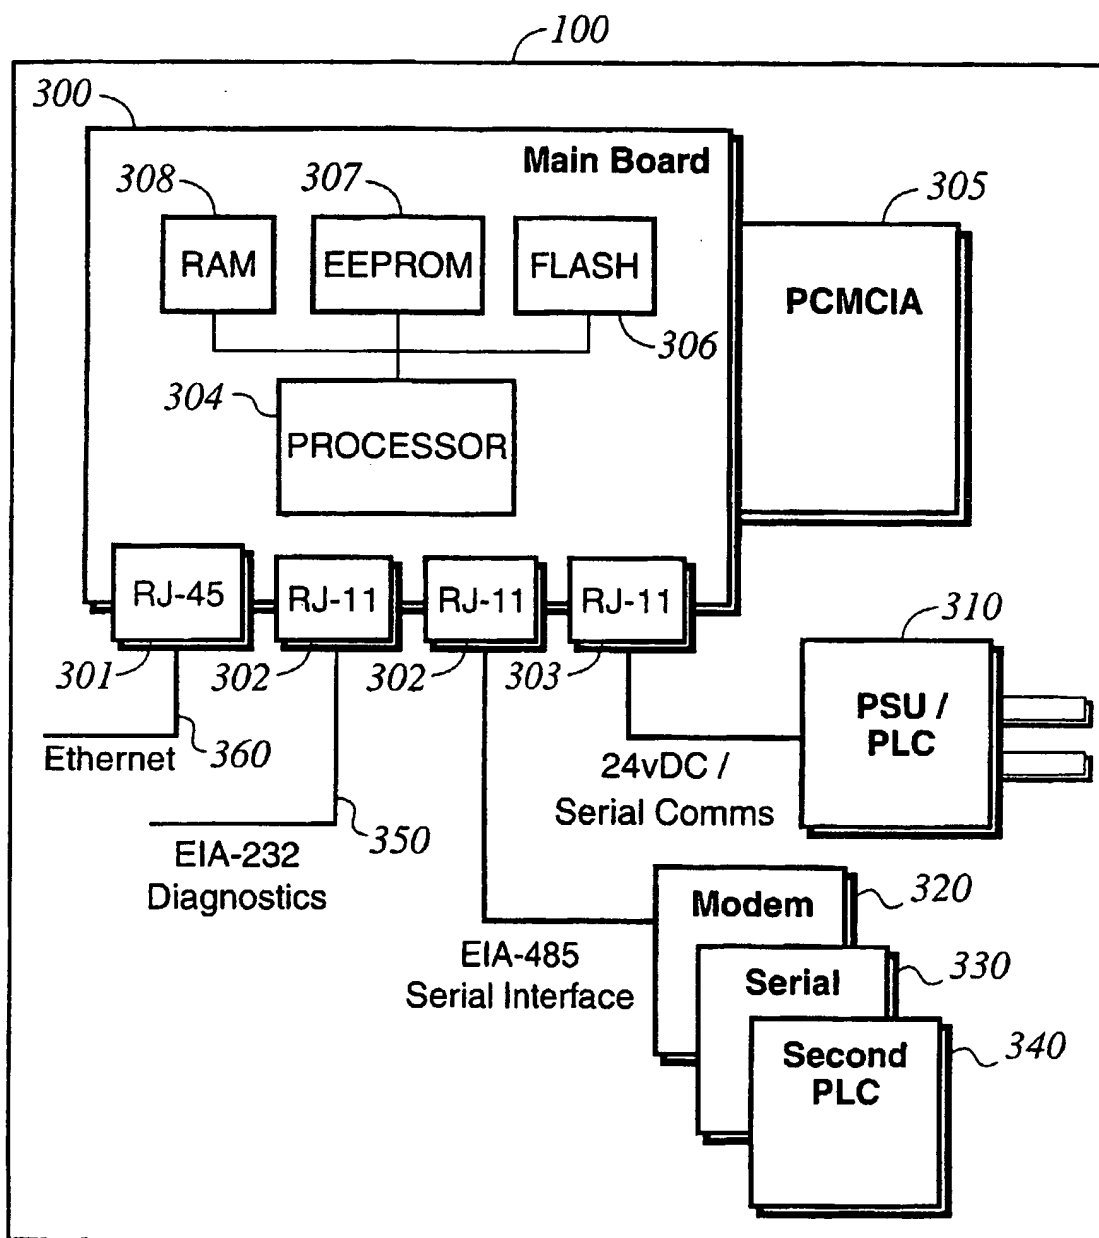


FIG. 3

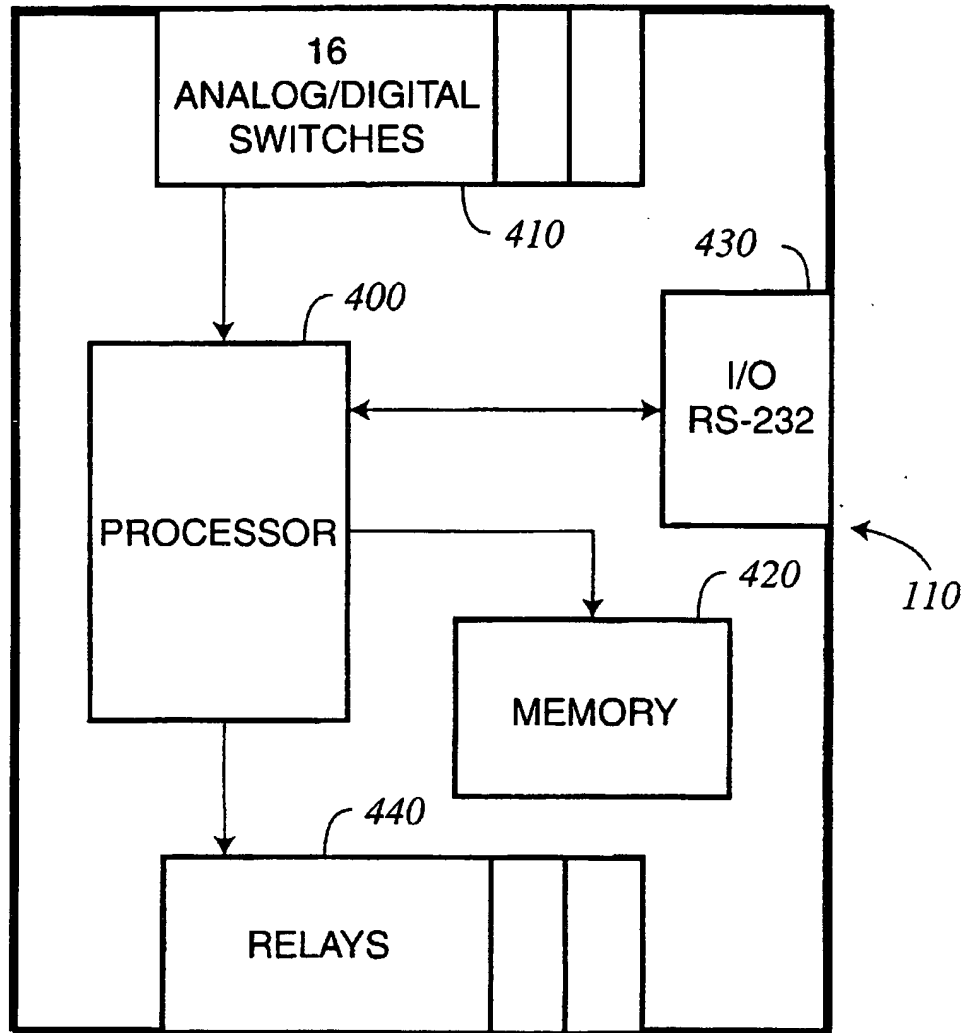


FIG. 4

5/32

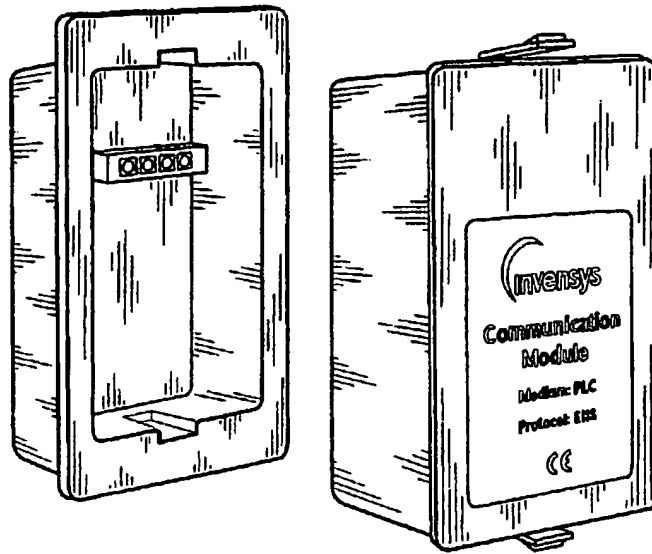


FIG. 5

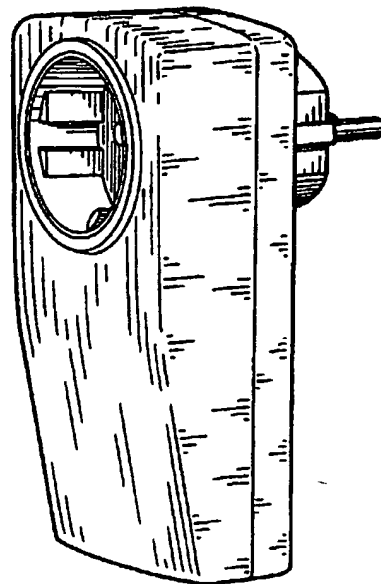


FIG. 6a

SUBSTITUTE SHEET (RULE 26)

6/32

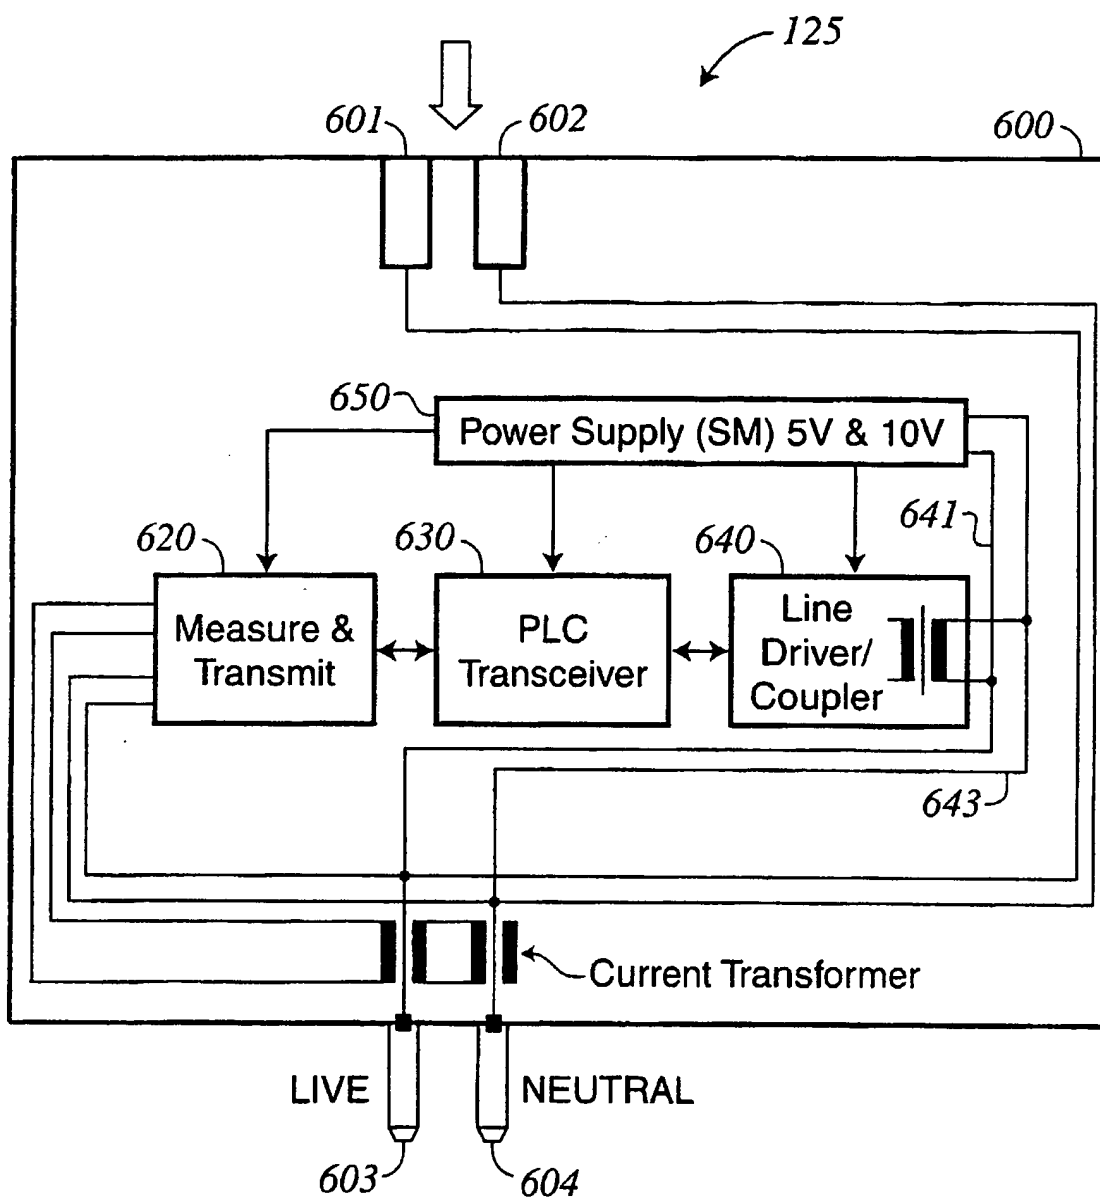


FIG. 6b

SUBSTITUTE SHEET (RULE 26)

7/32

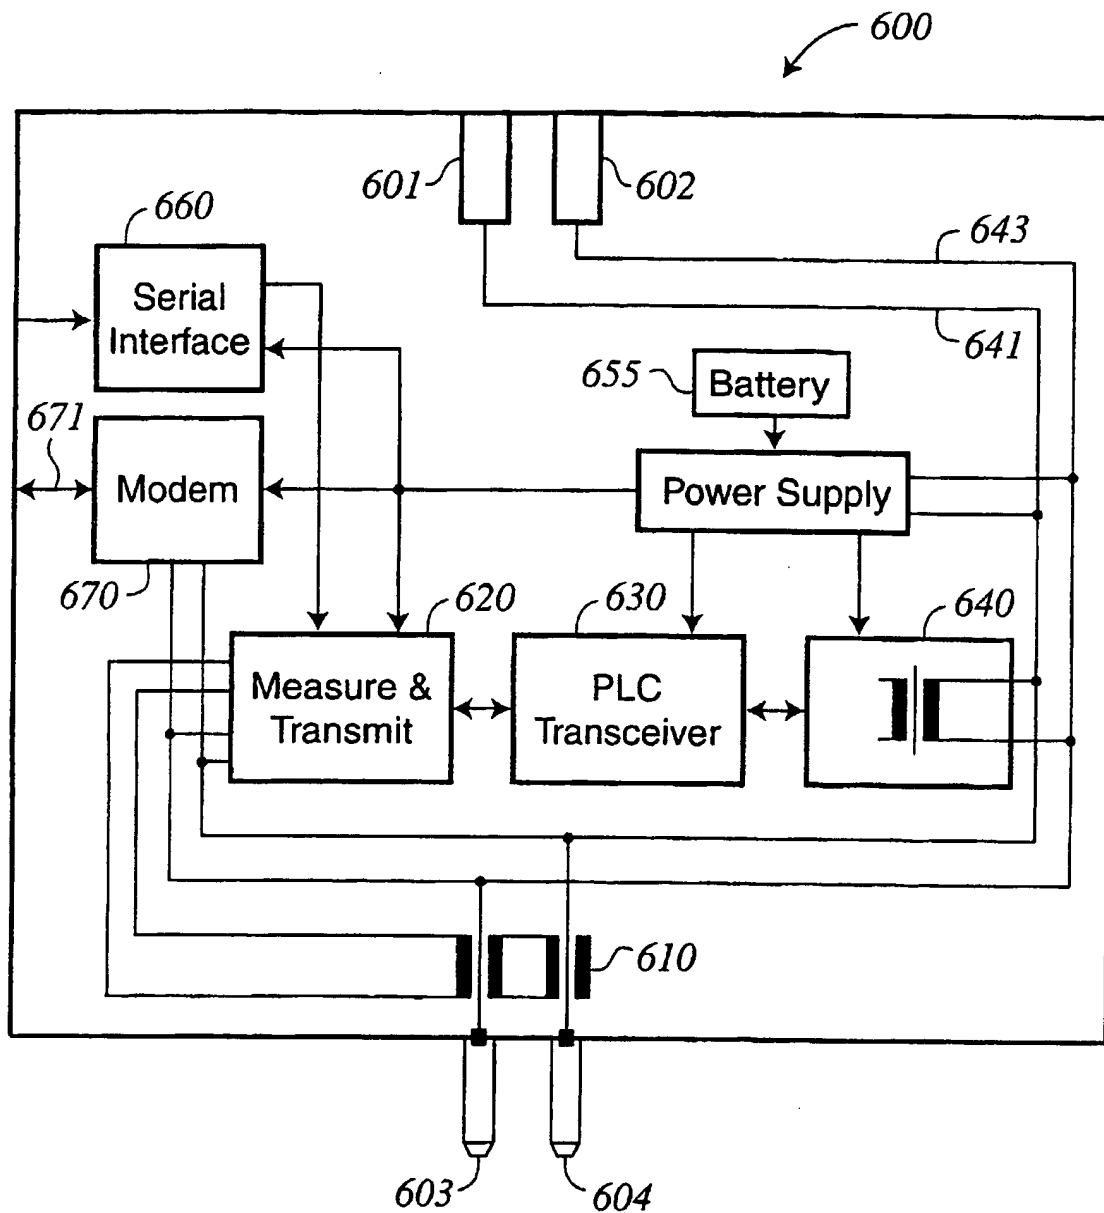


FIG. 6c

8/32

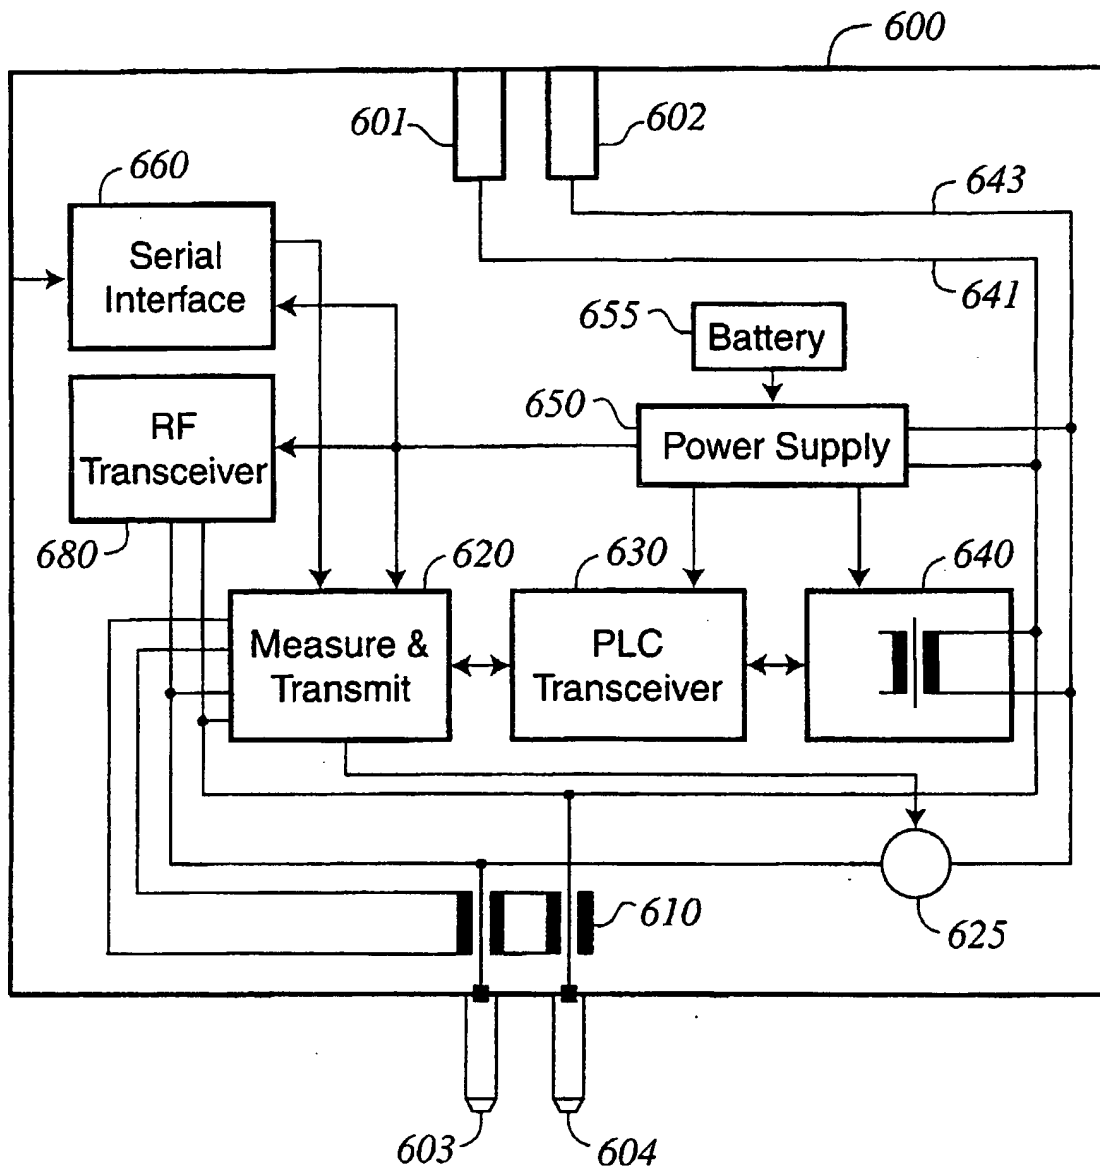


FIG. 6d

9/32

FIG. 7a


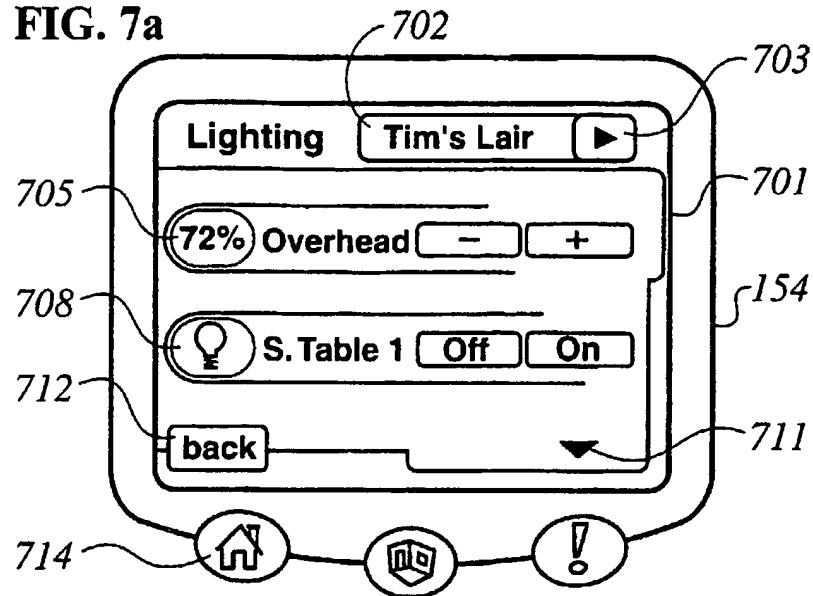


FIG. 7b

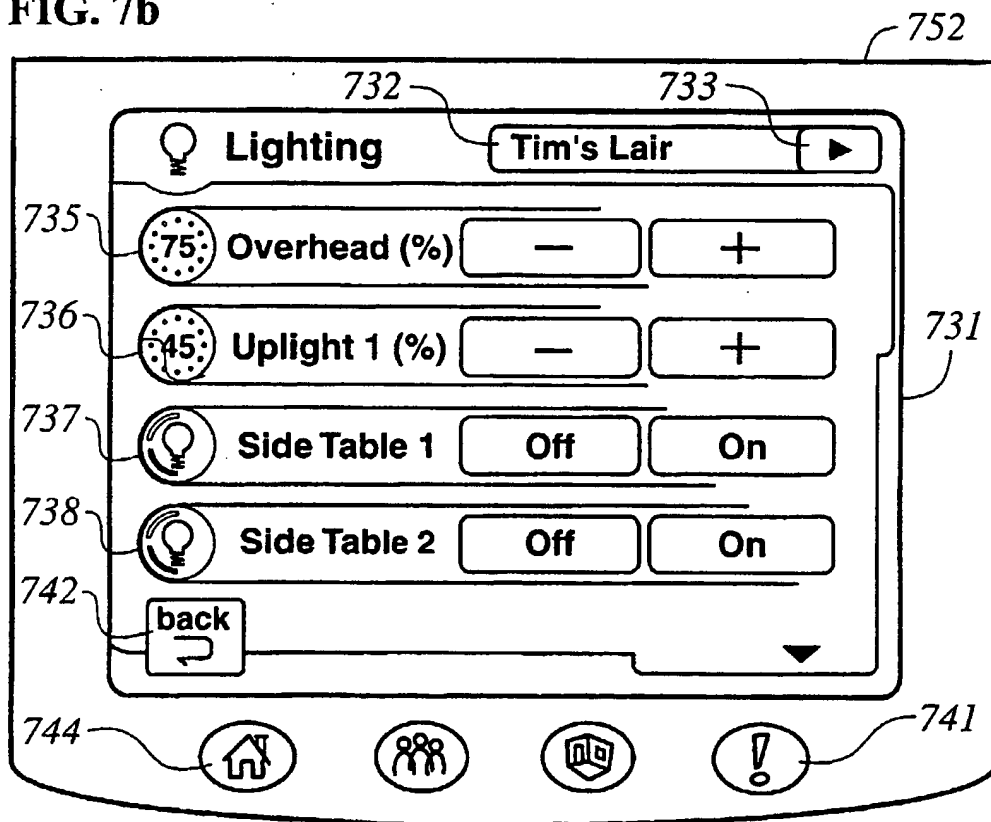

10/32

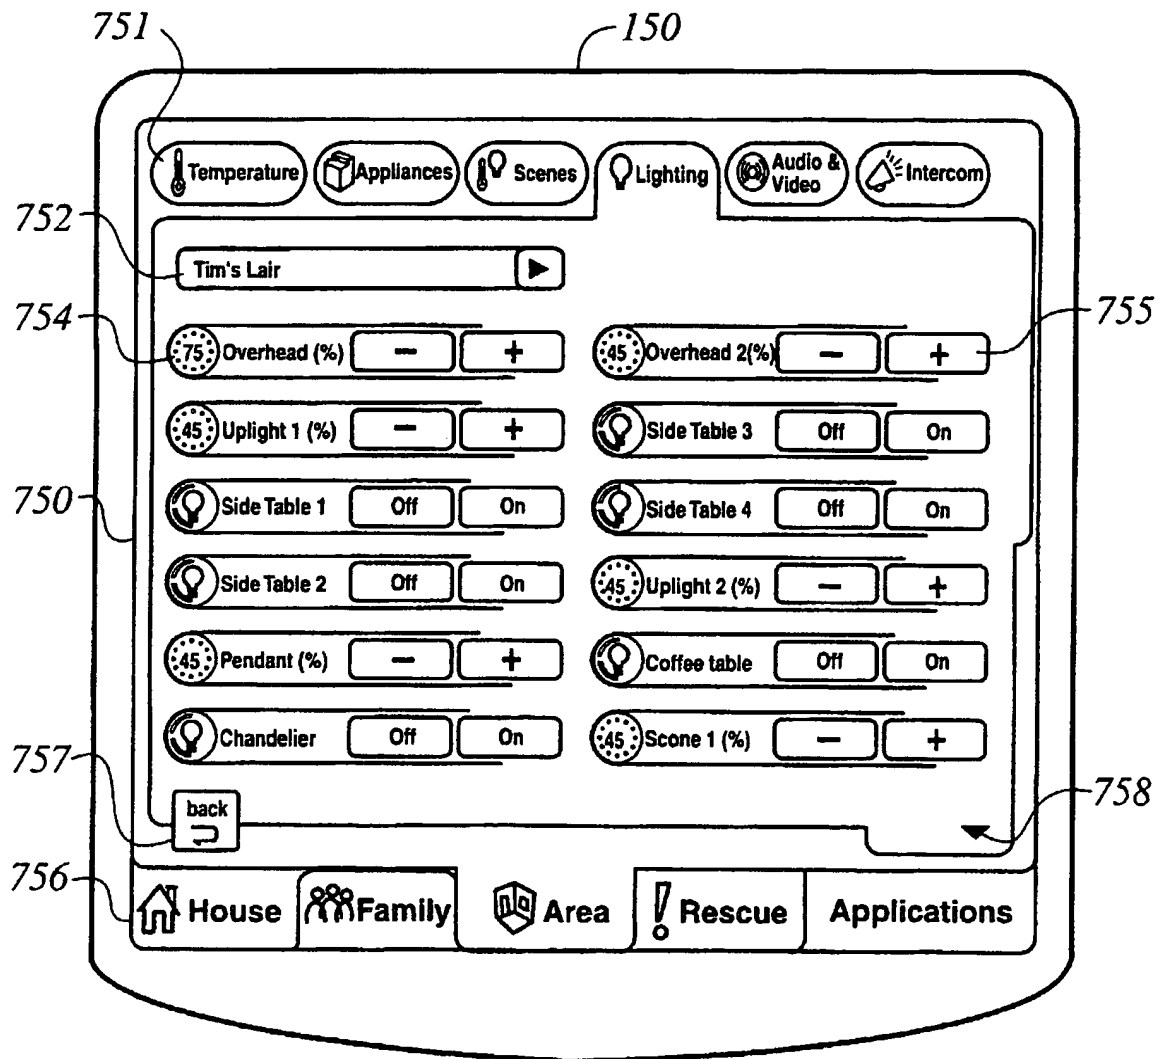


FIG. 7c



11/32

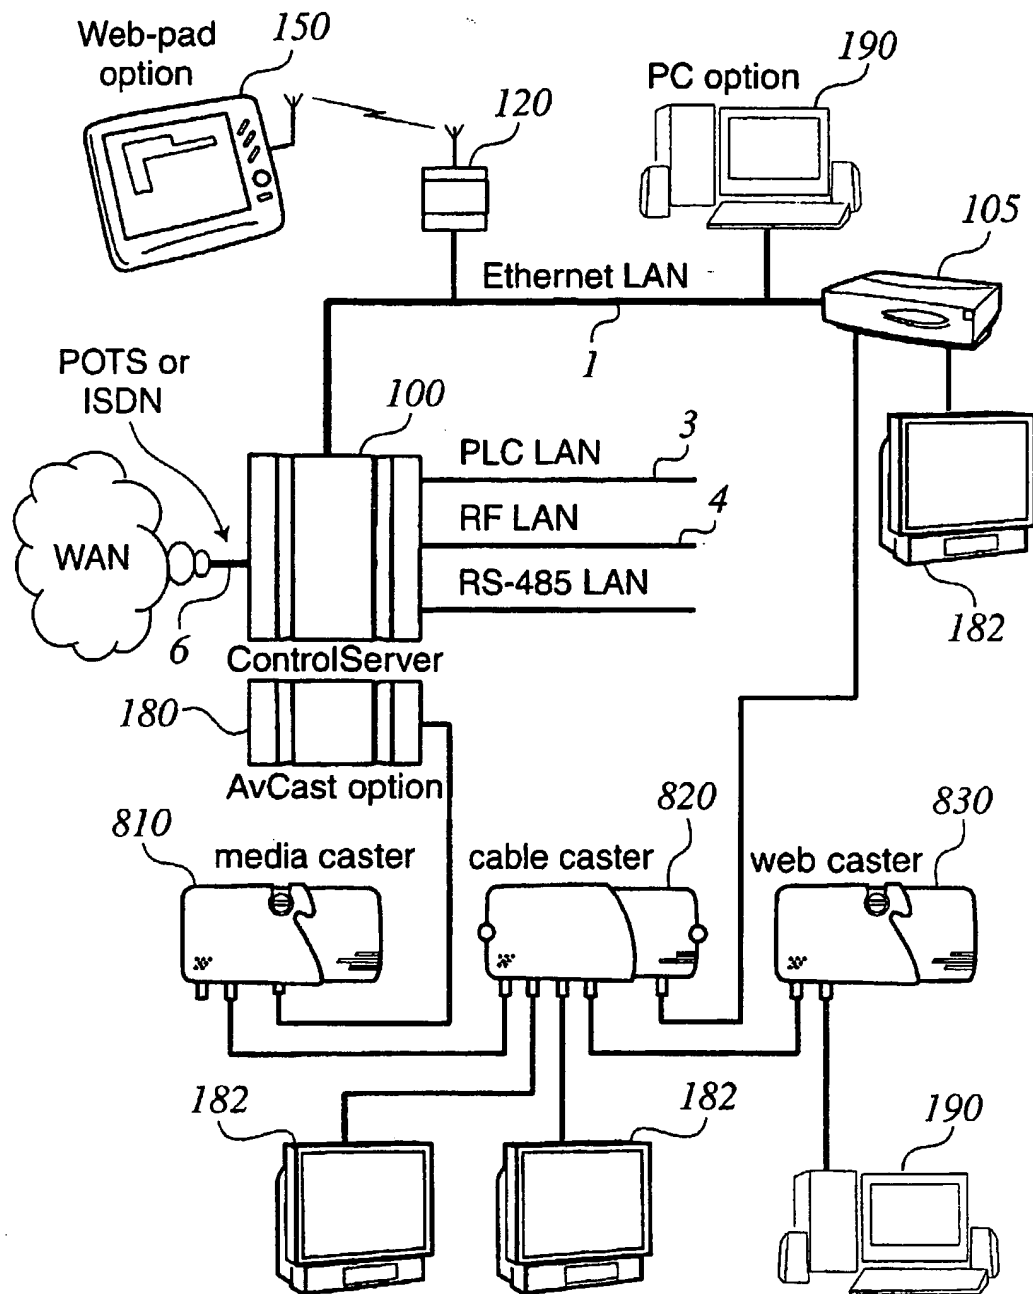
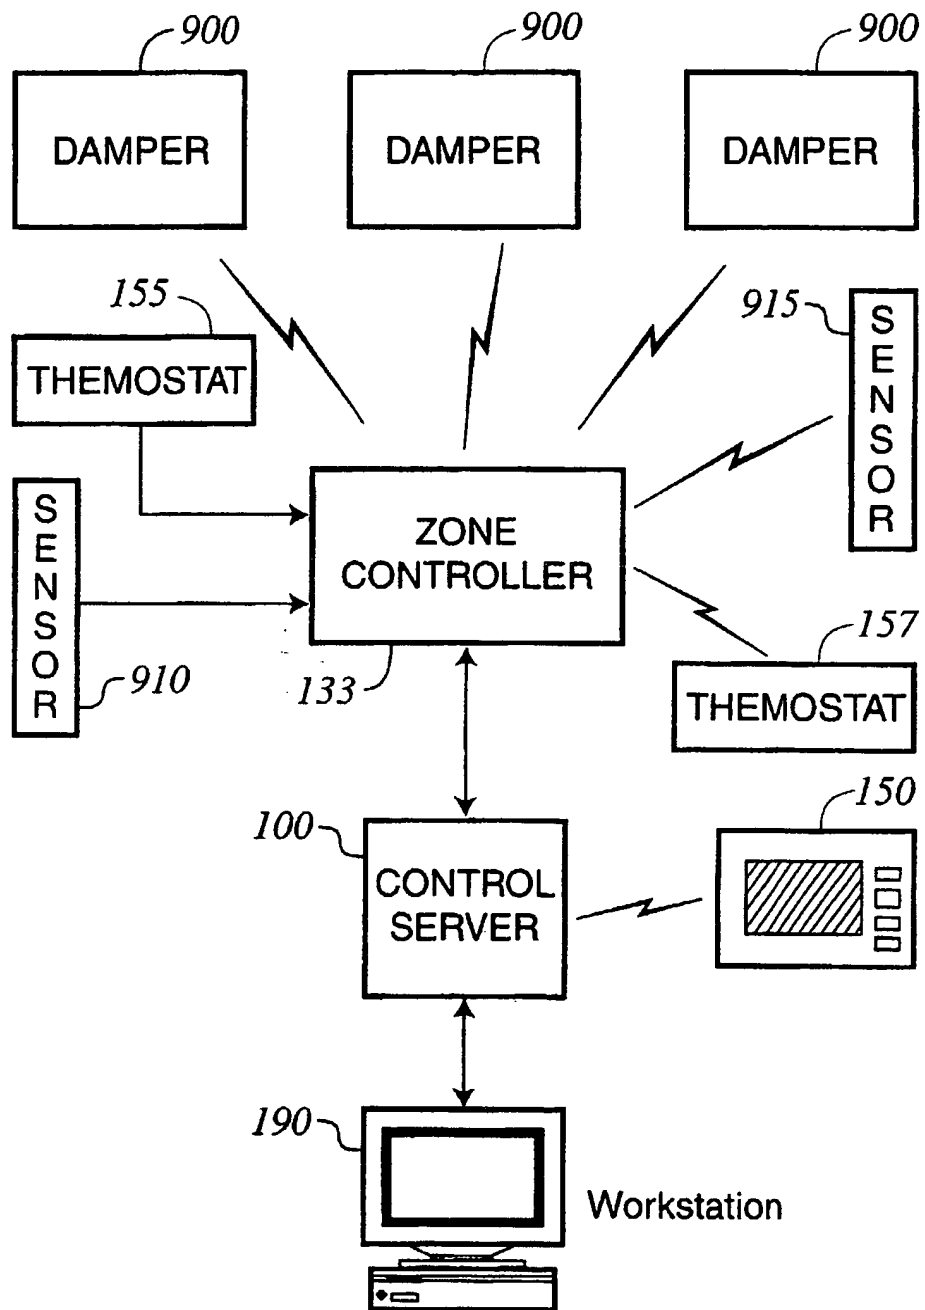


FIG. 8

12/32

**FIG. 9**

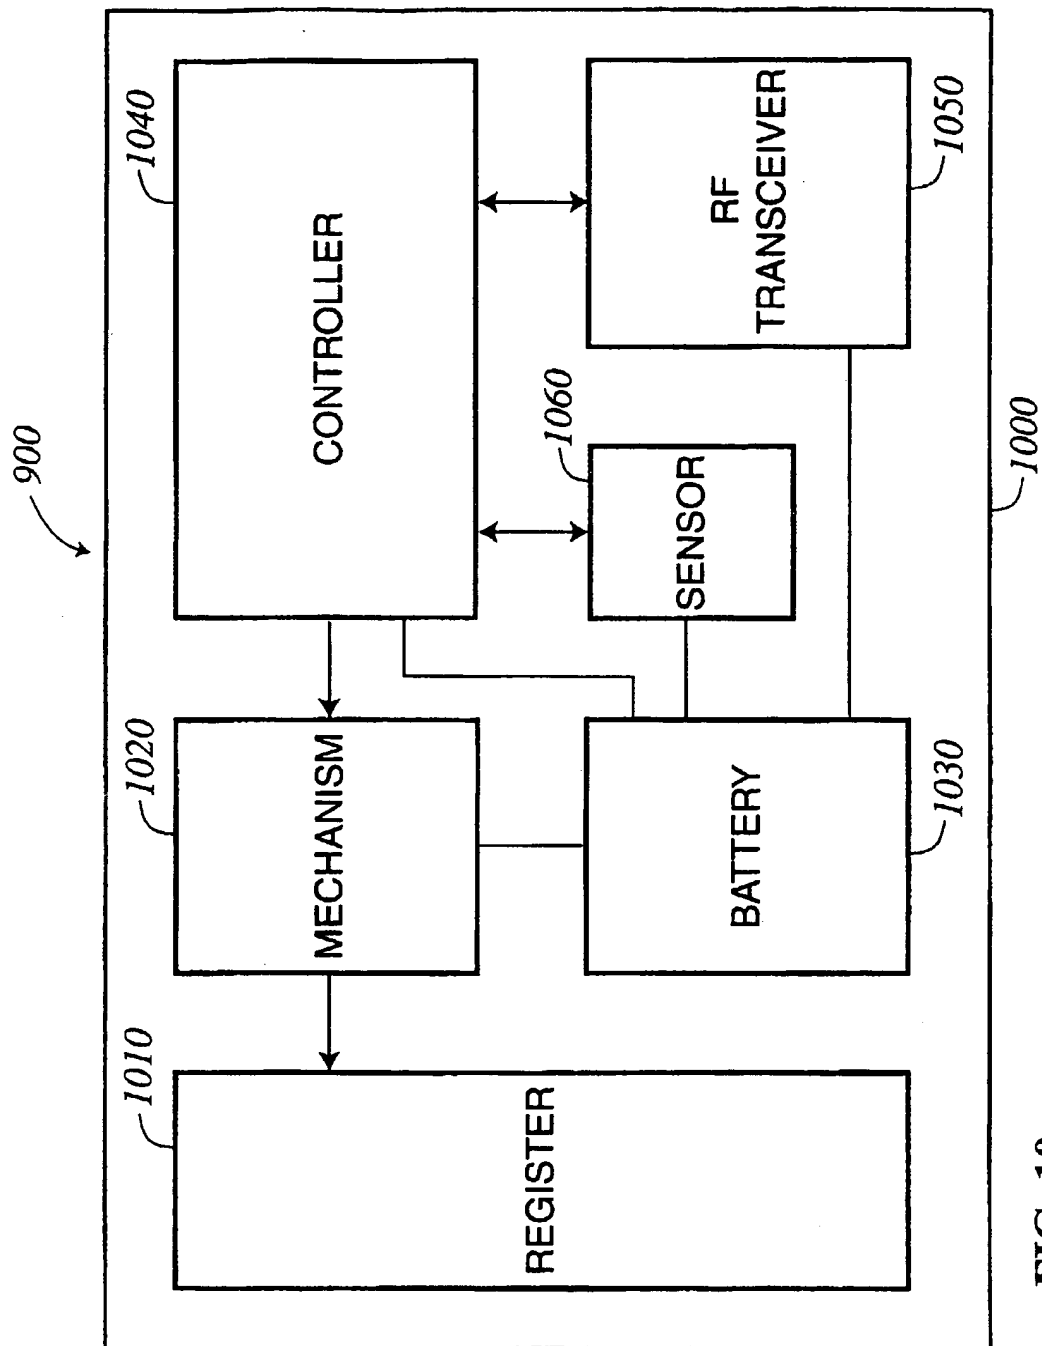
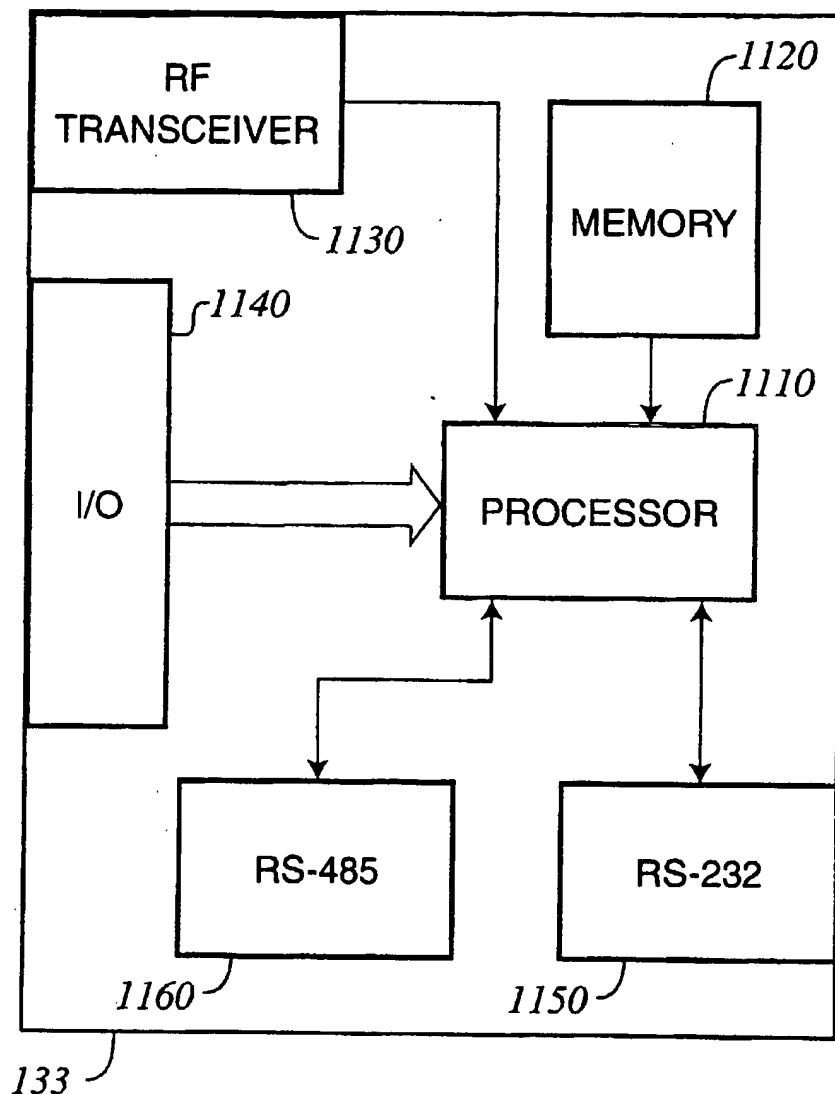
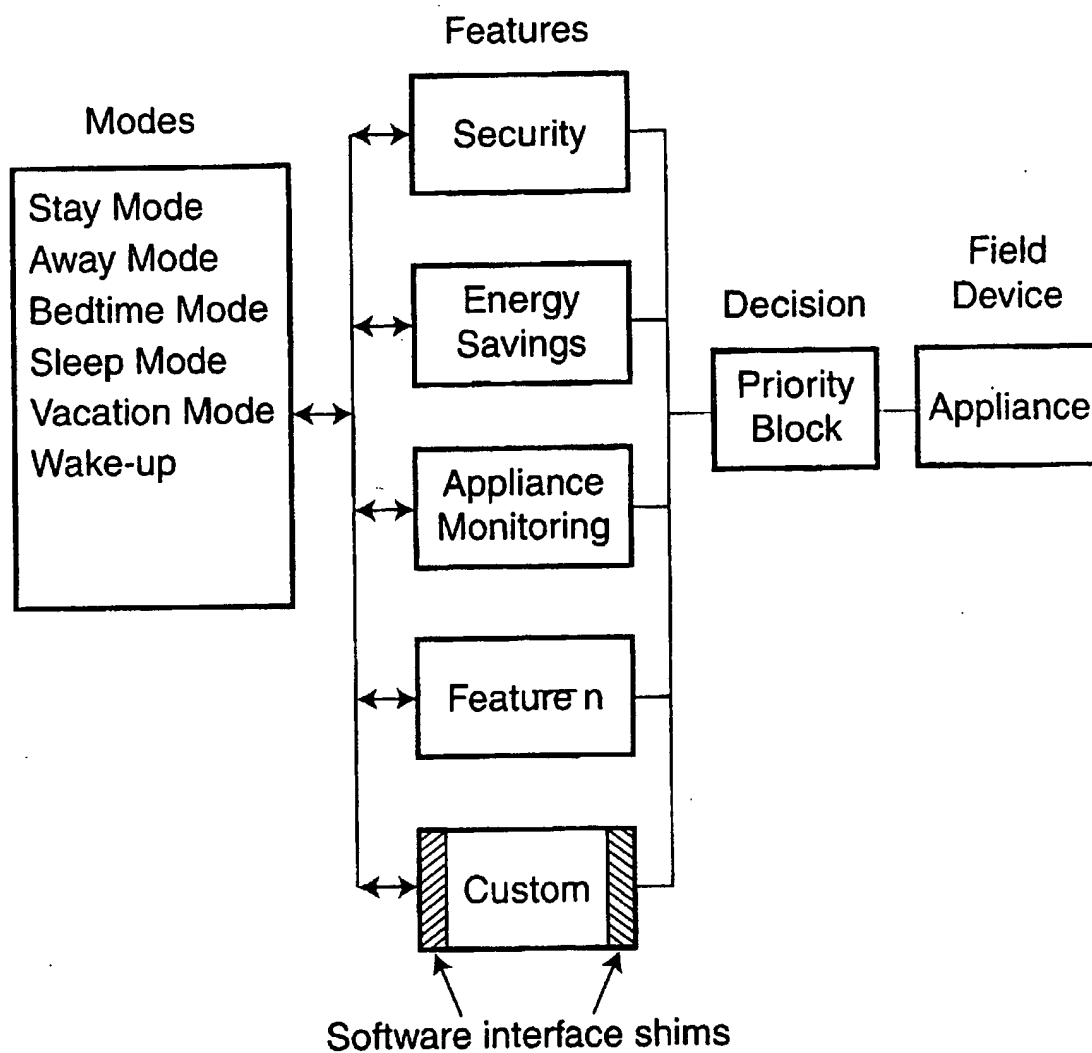


FIG. 10

**FIG. 11**

15/32

**FIG. 12**

16/32

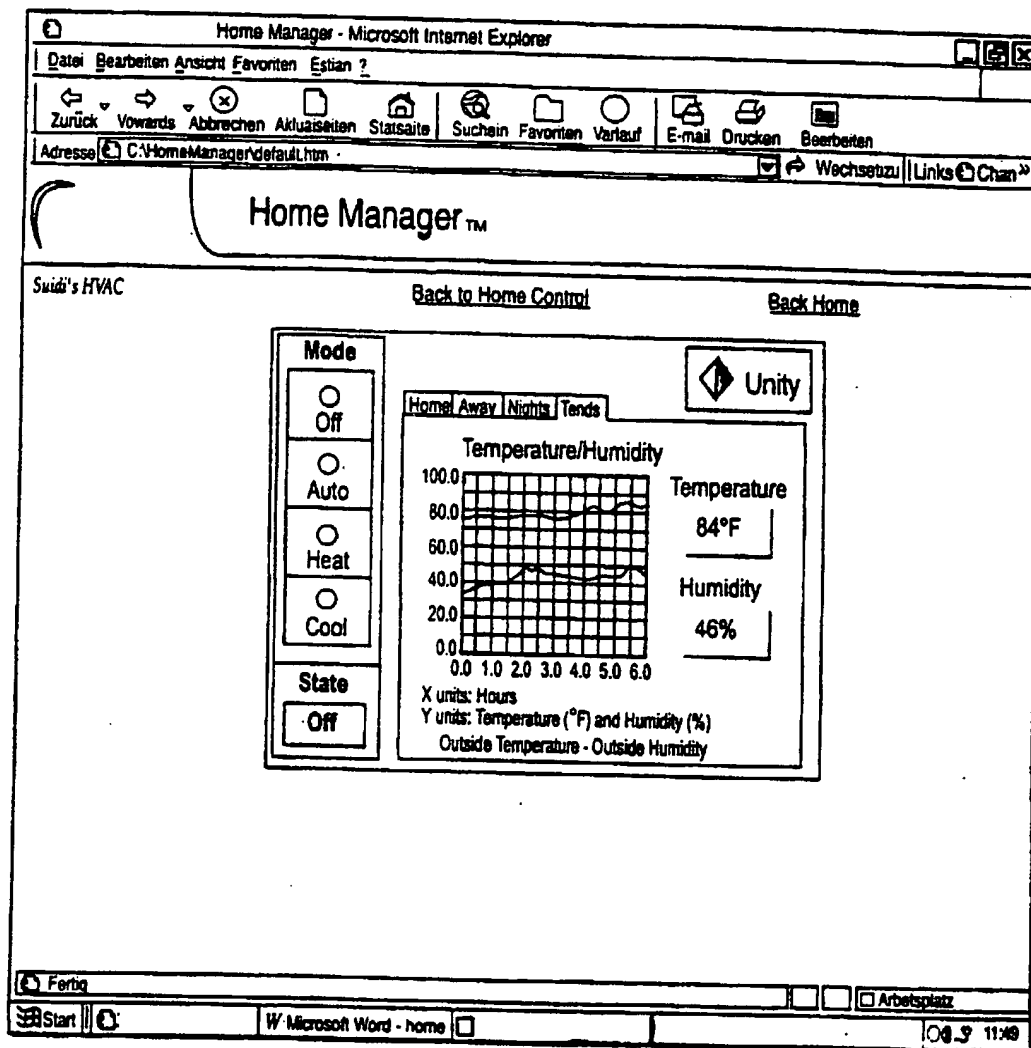


FIG. 13

SUBSTITUTE SHEET (RULE 26)

17/32

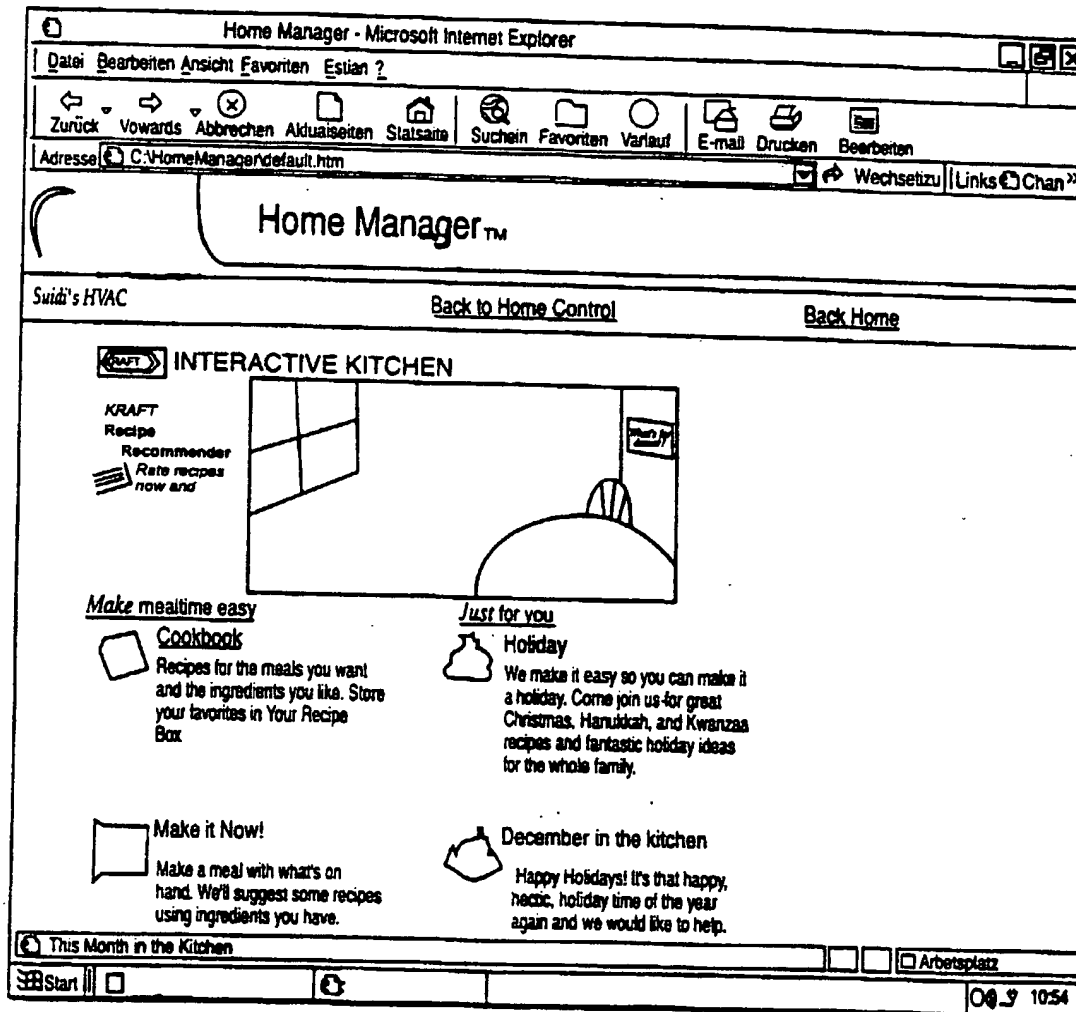


FIG. 14

SUBSTITUTE SHEET (RULE 26)

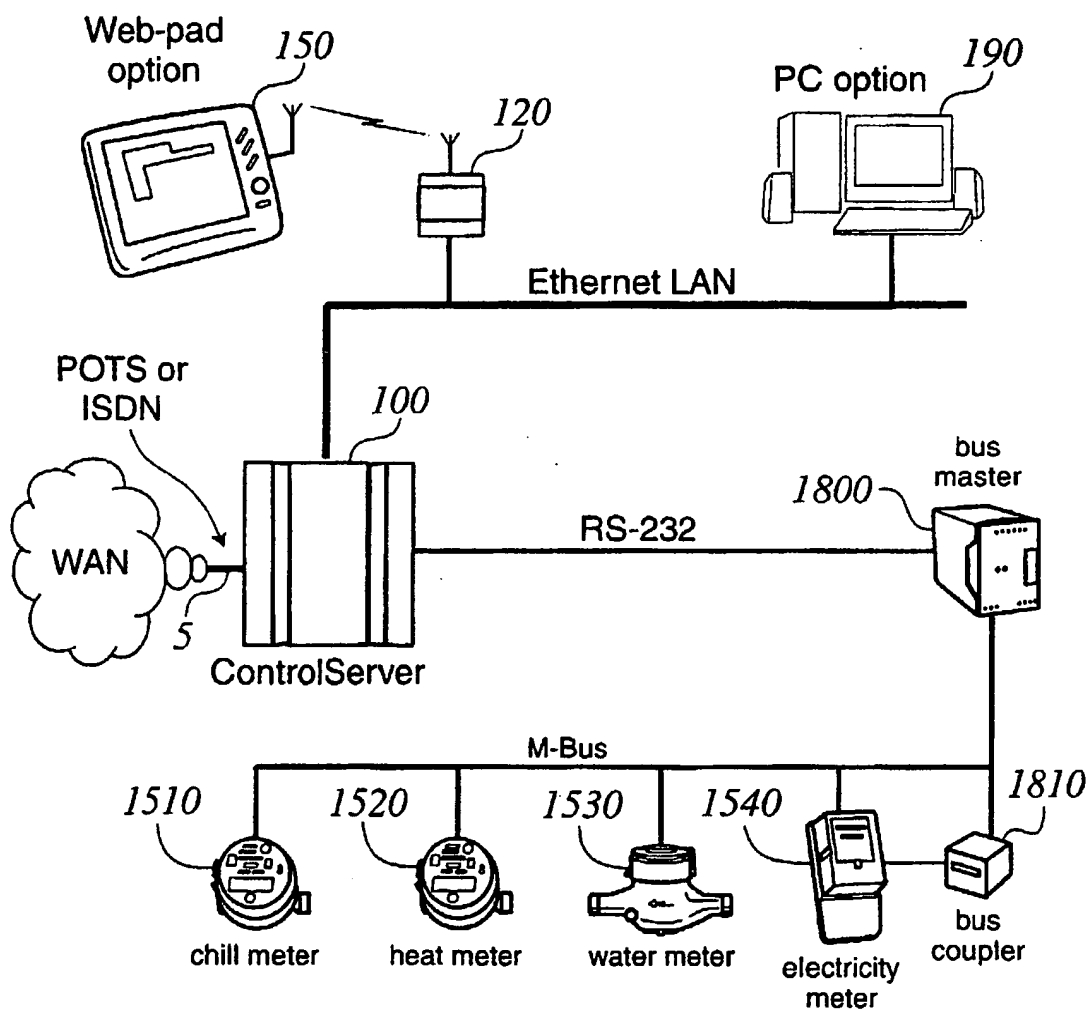


FIG. 15



19/32

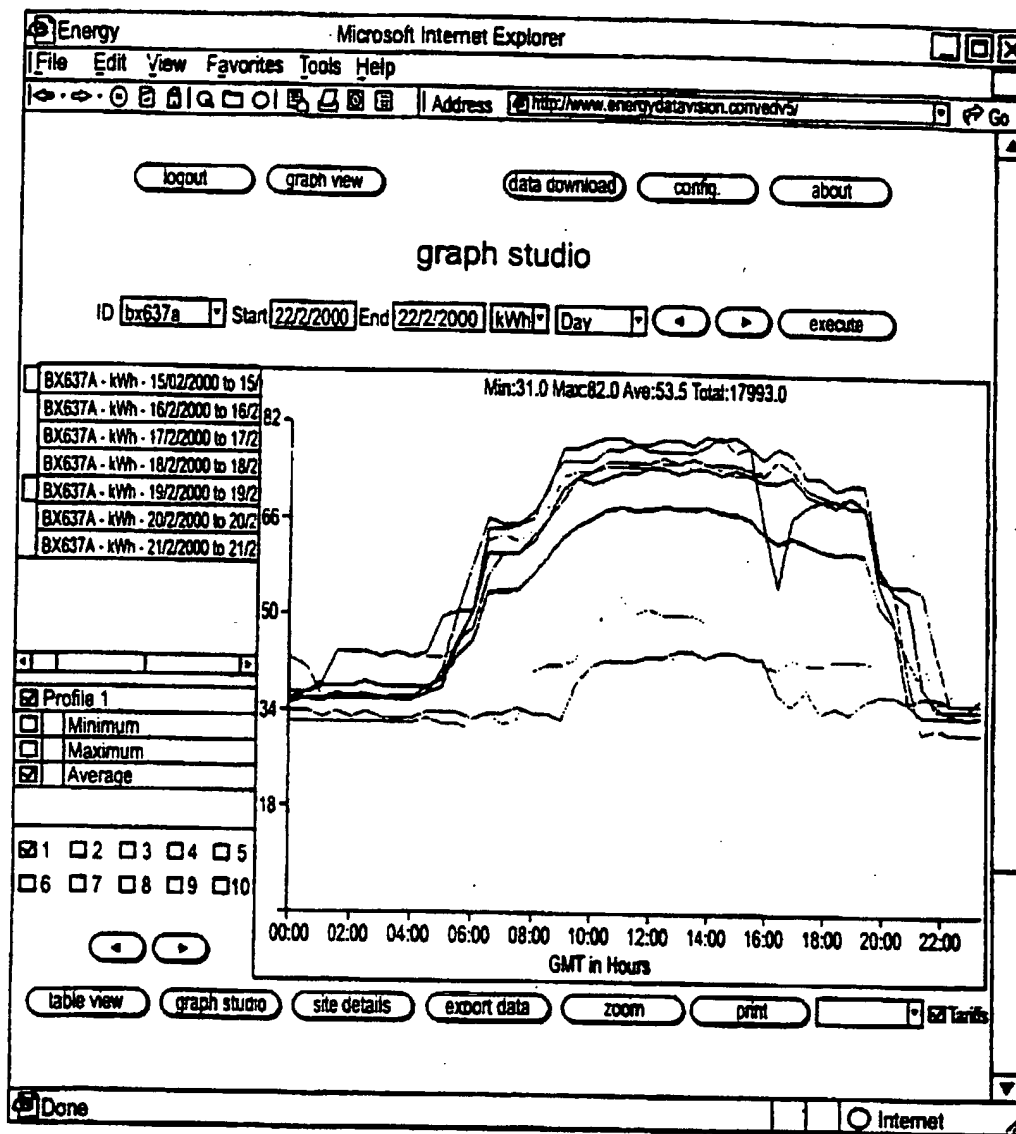


FIG. 16

20/32

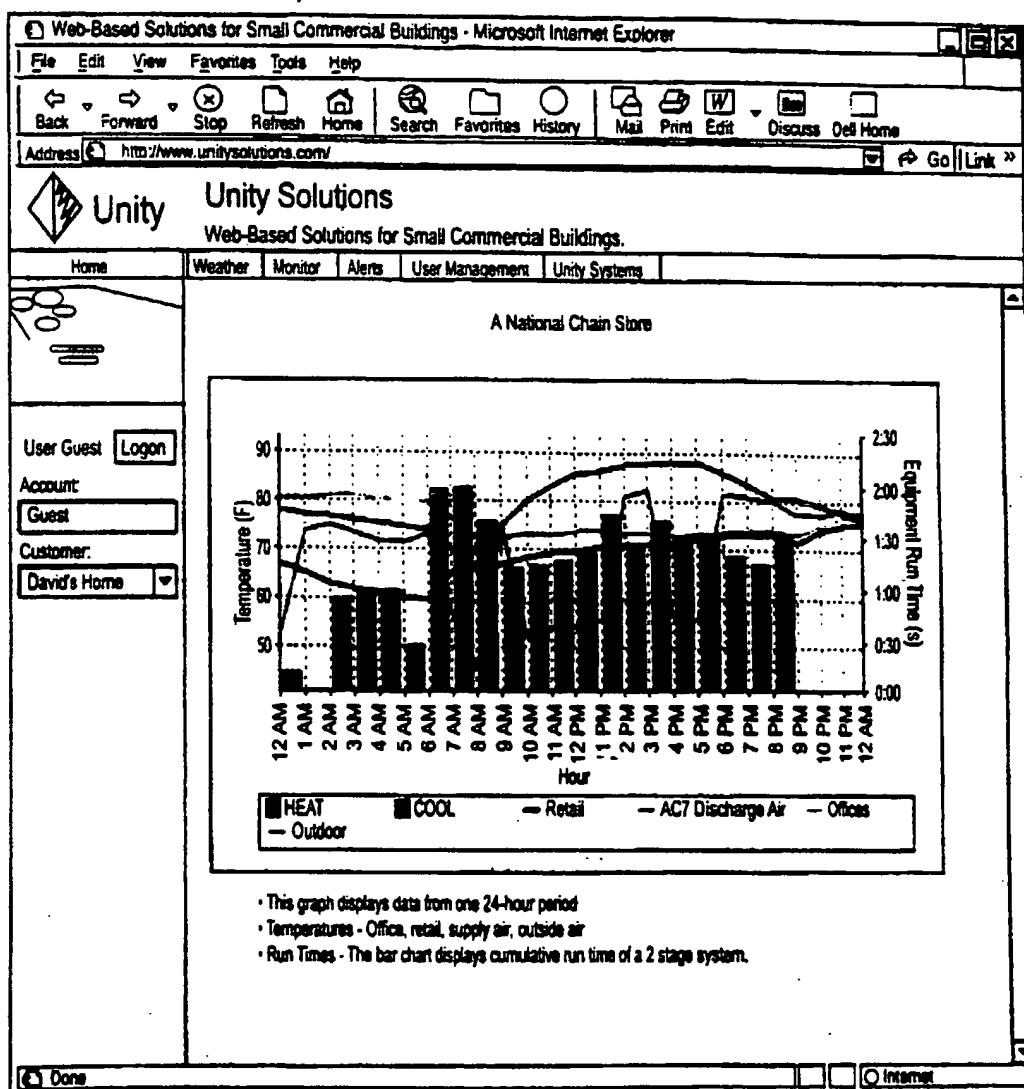


FIG. 17

SUBSTITUTE SHEET (RULE 26)

21/32

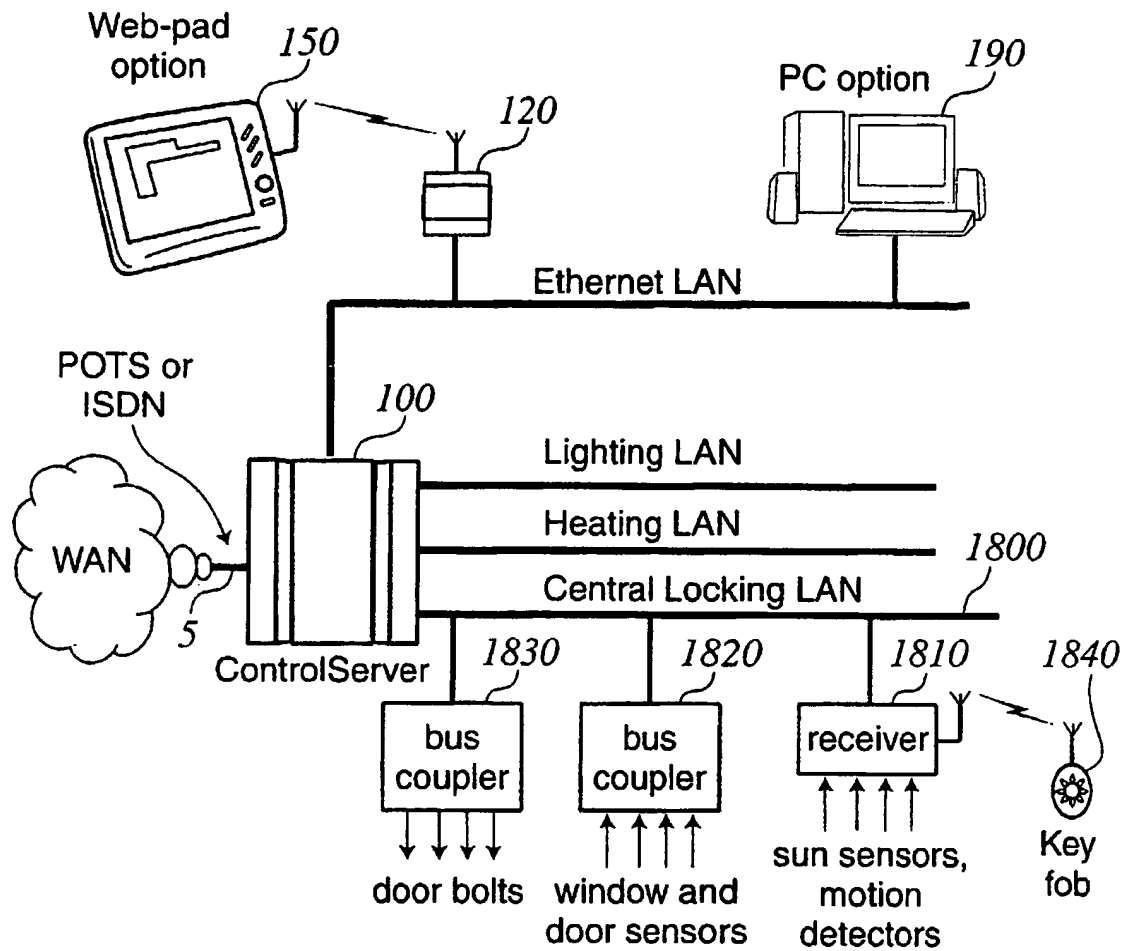


FIG. 18

22/32

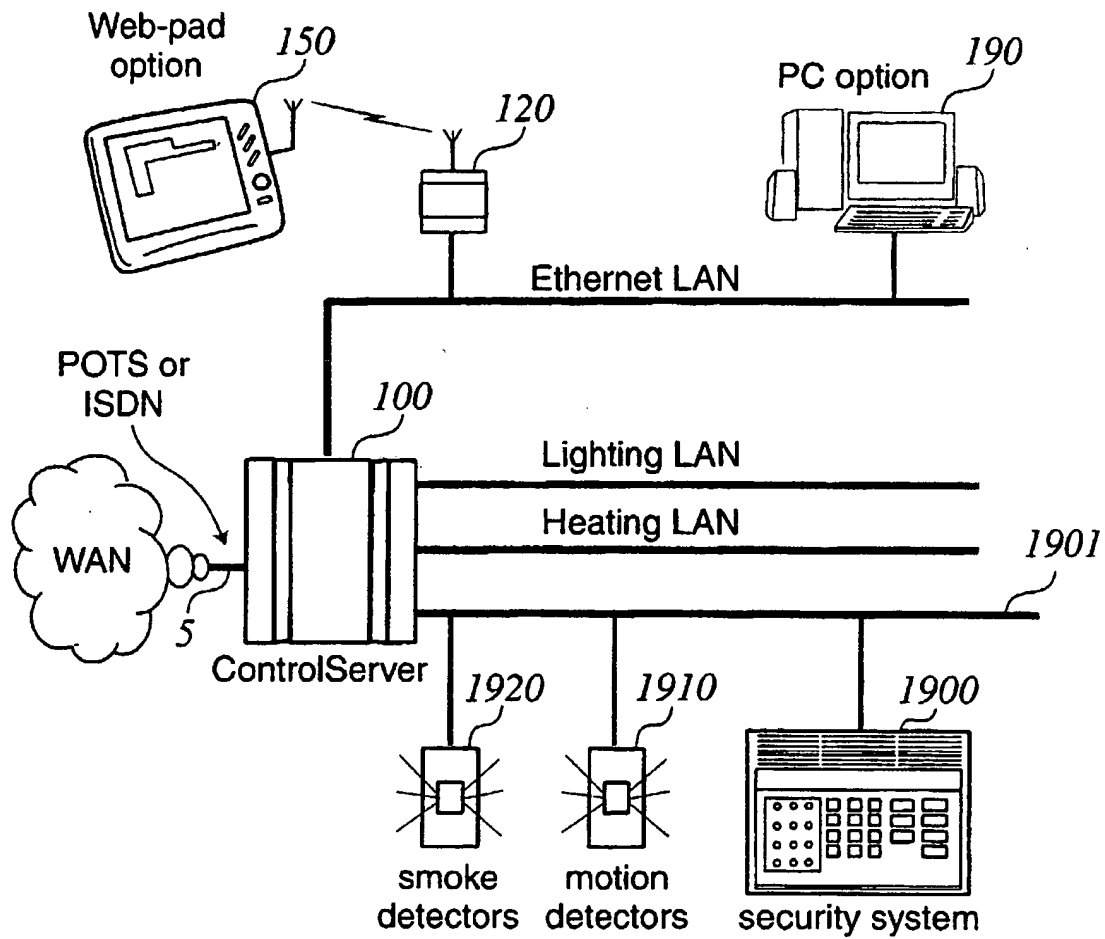


FIG. 19

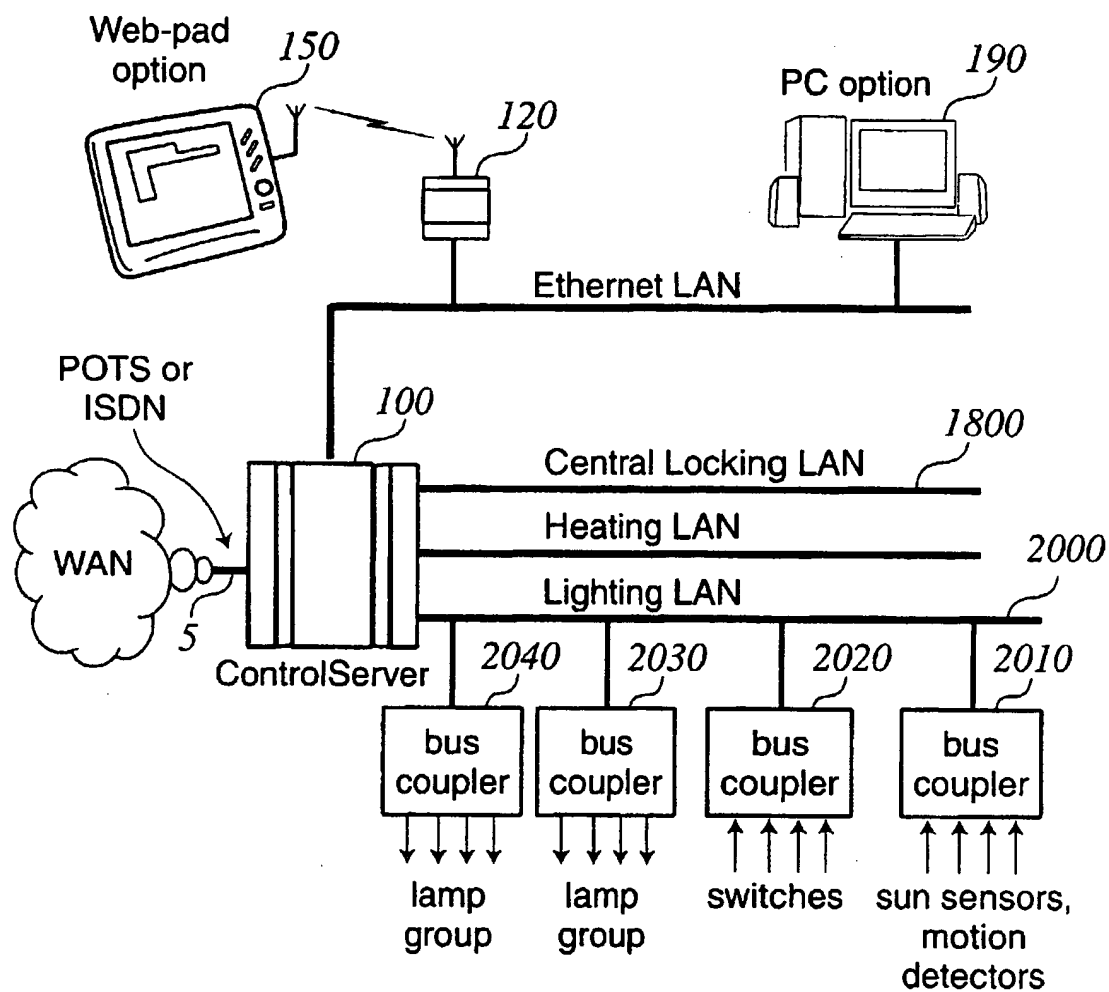


FIG. 20

24/32

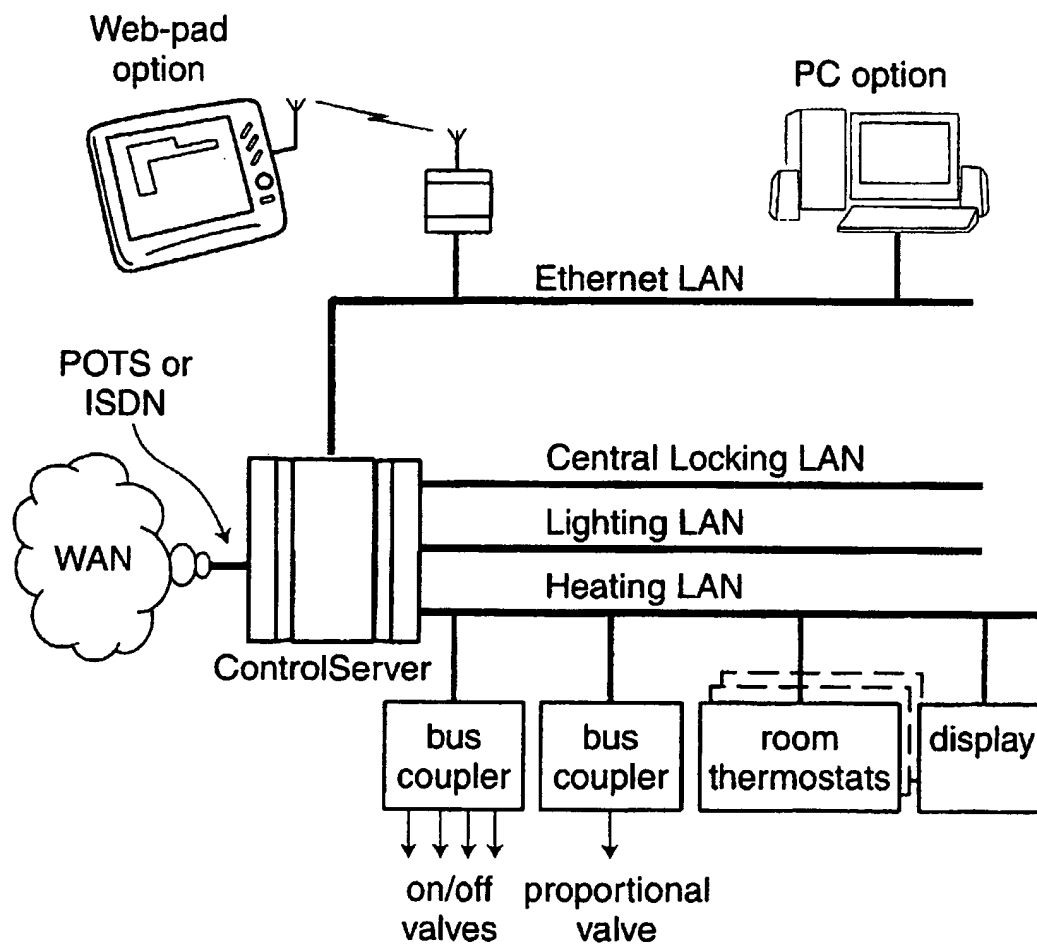


FIG. 21

25/32

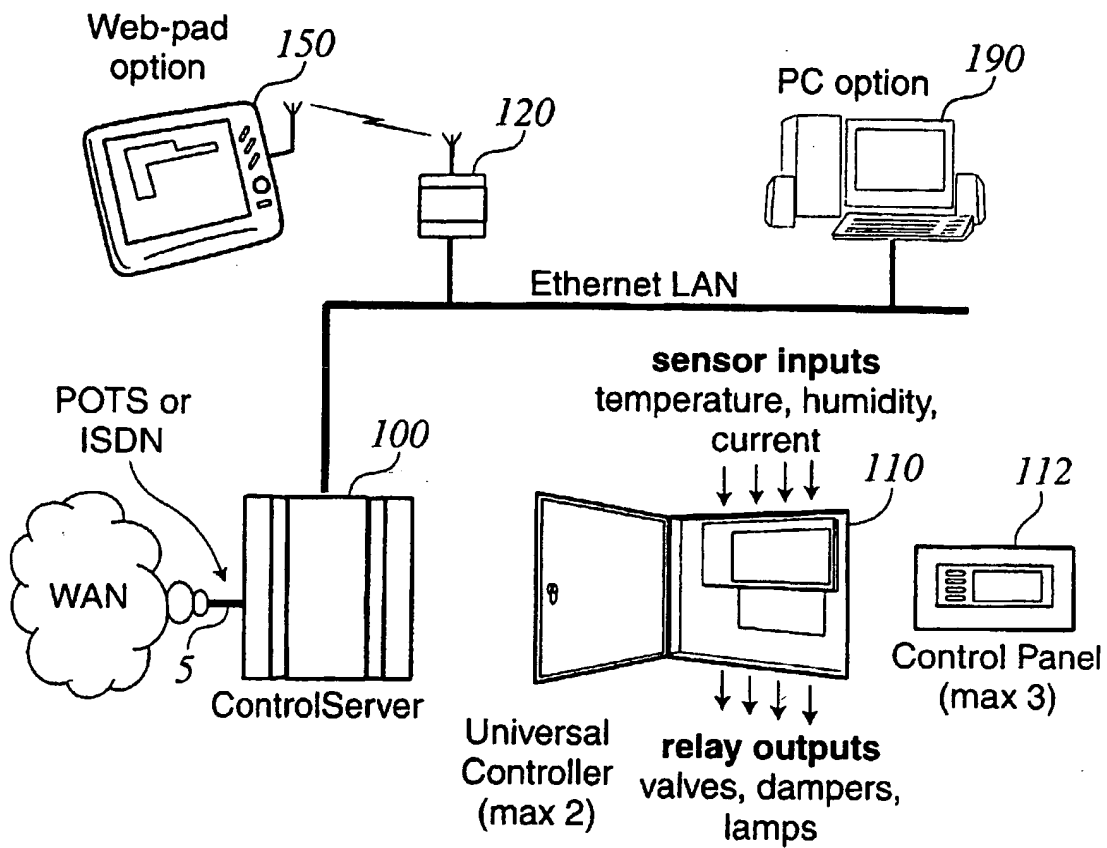


FIG. 22

26/32

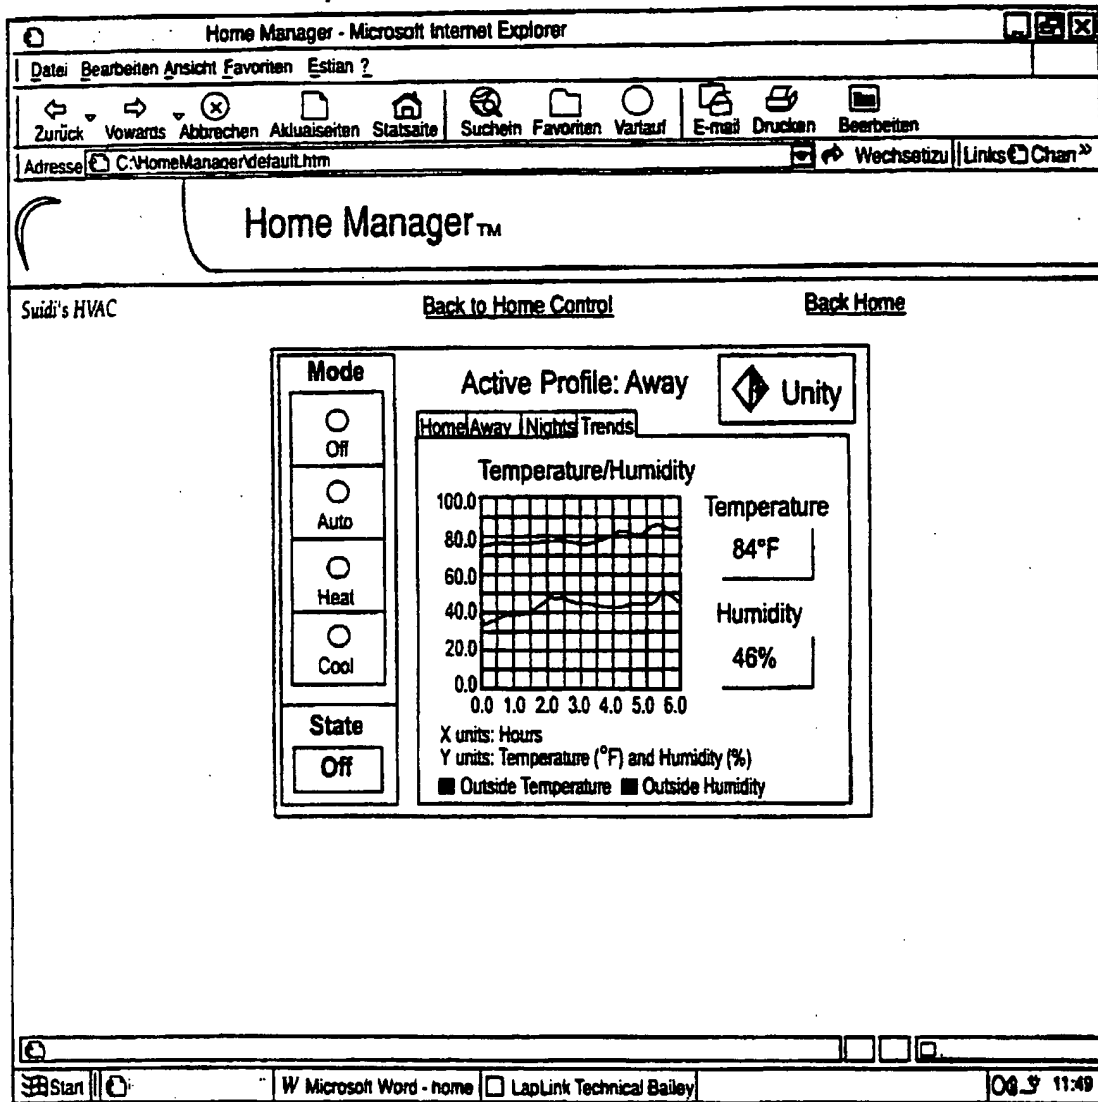
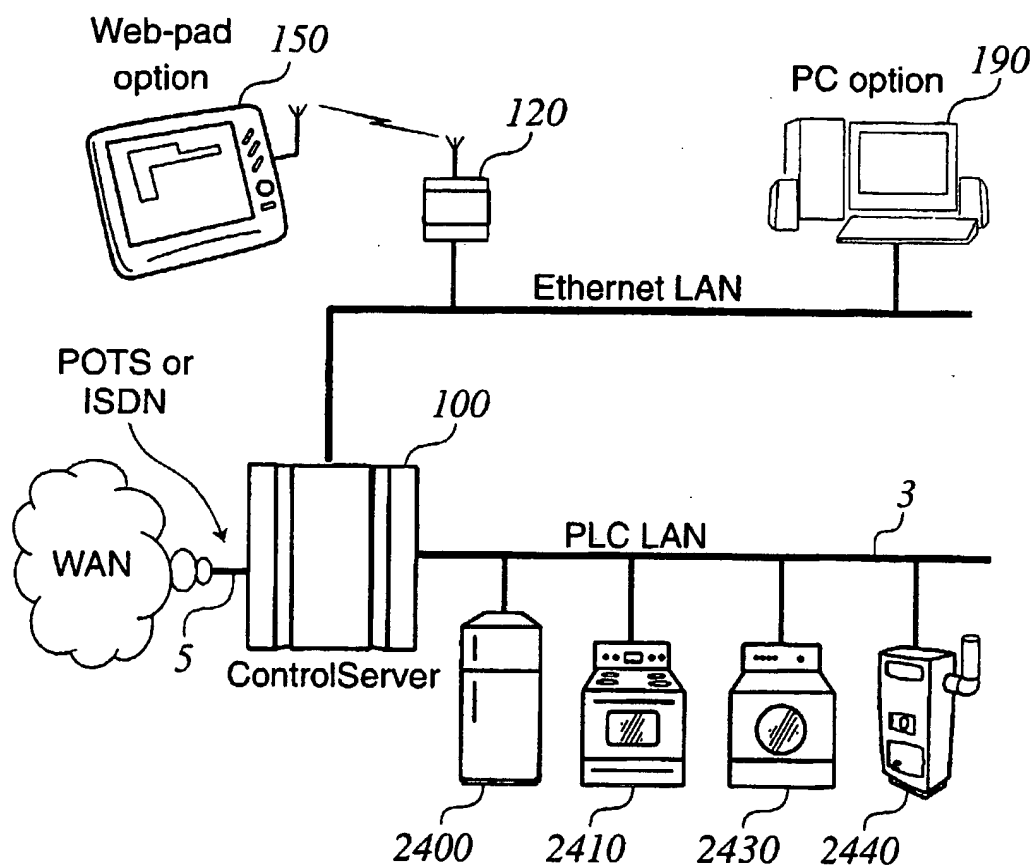


FIG. 23



**FIG. 24**

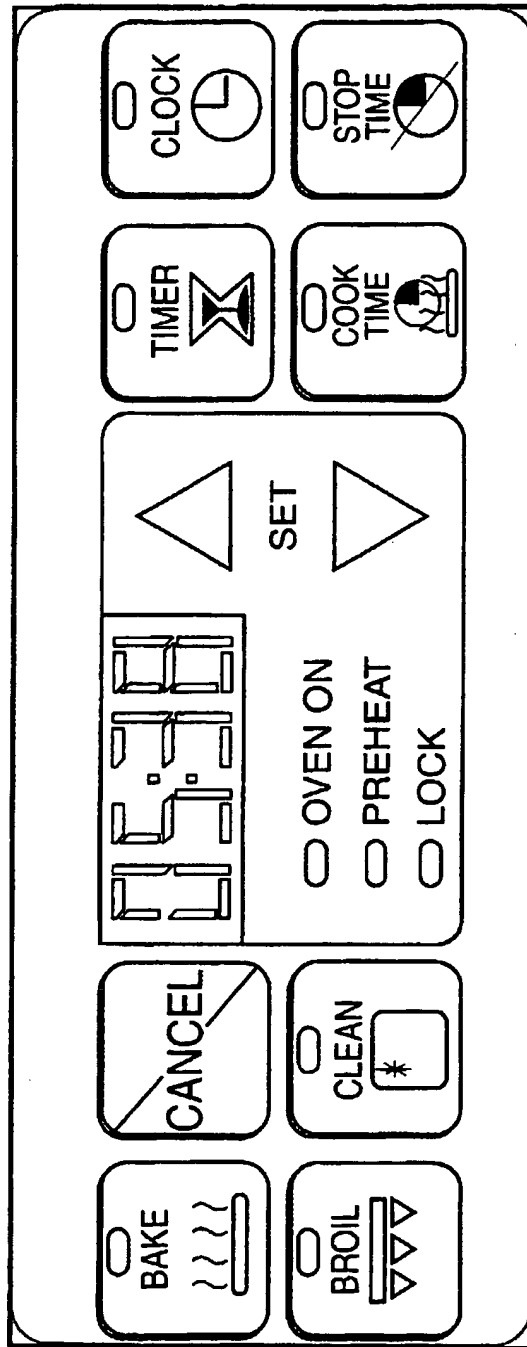
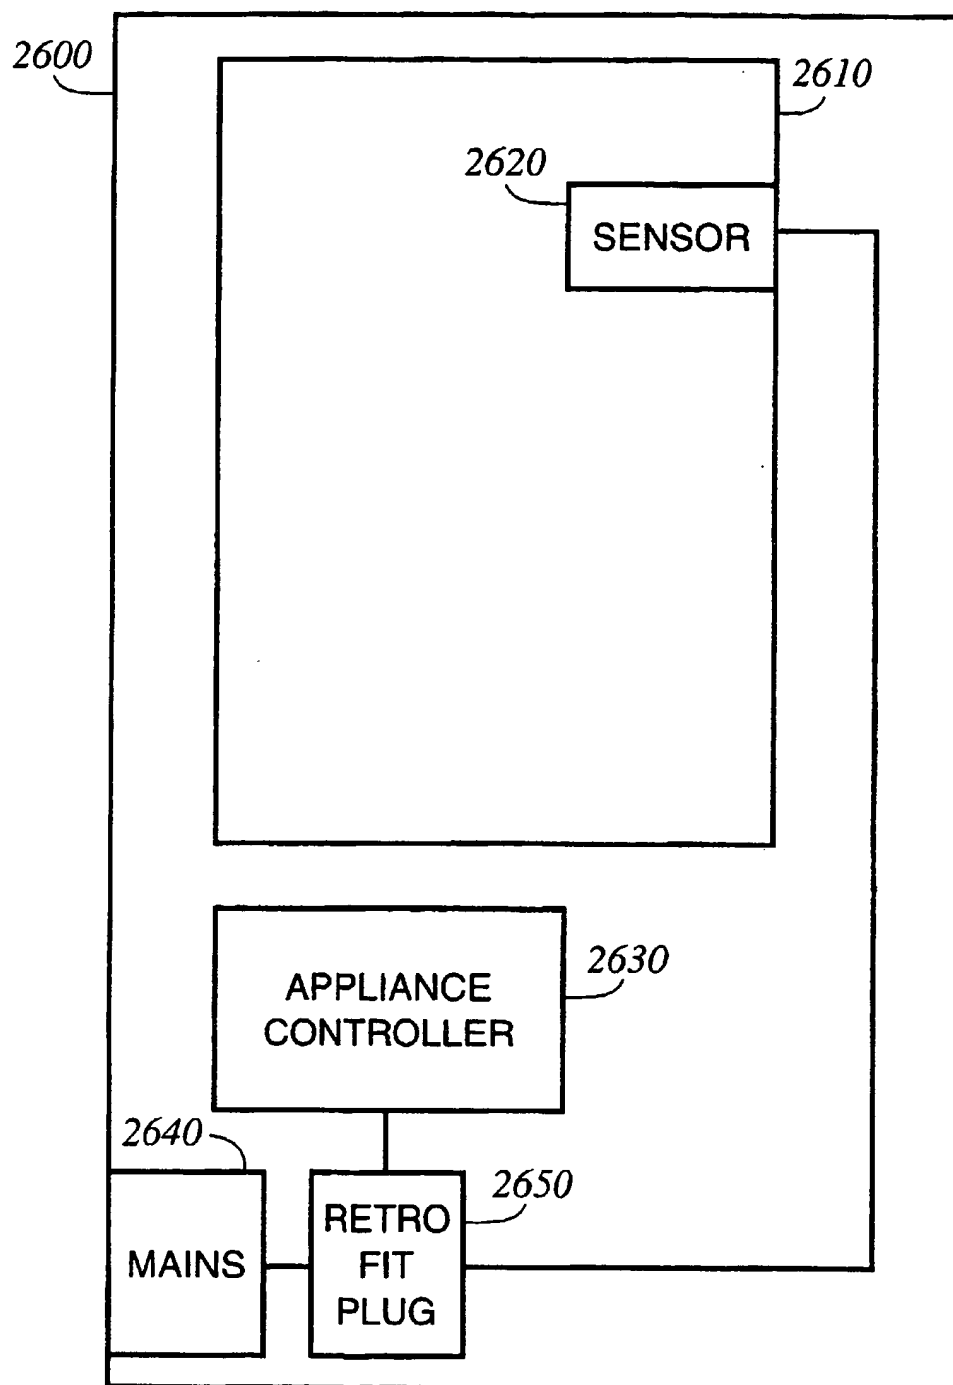


FIG. 25

**FIG. 26a**

30/32

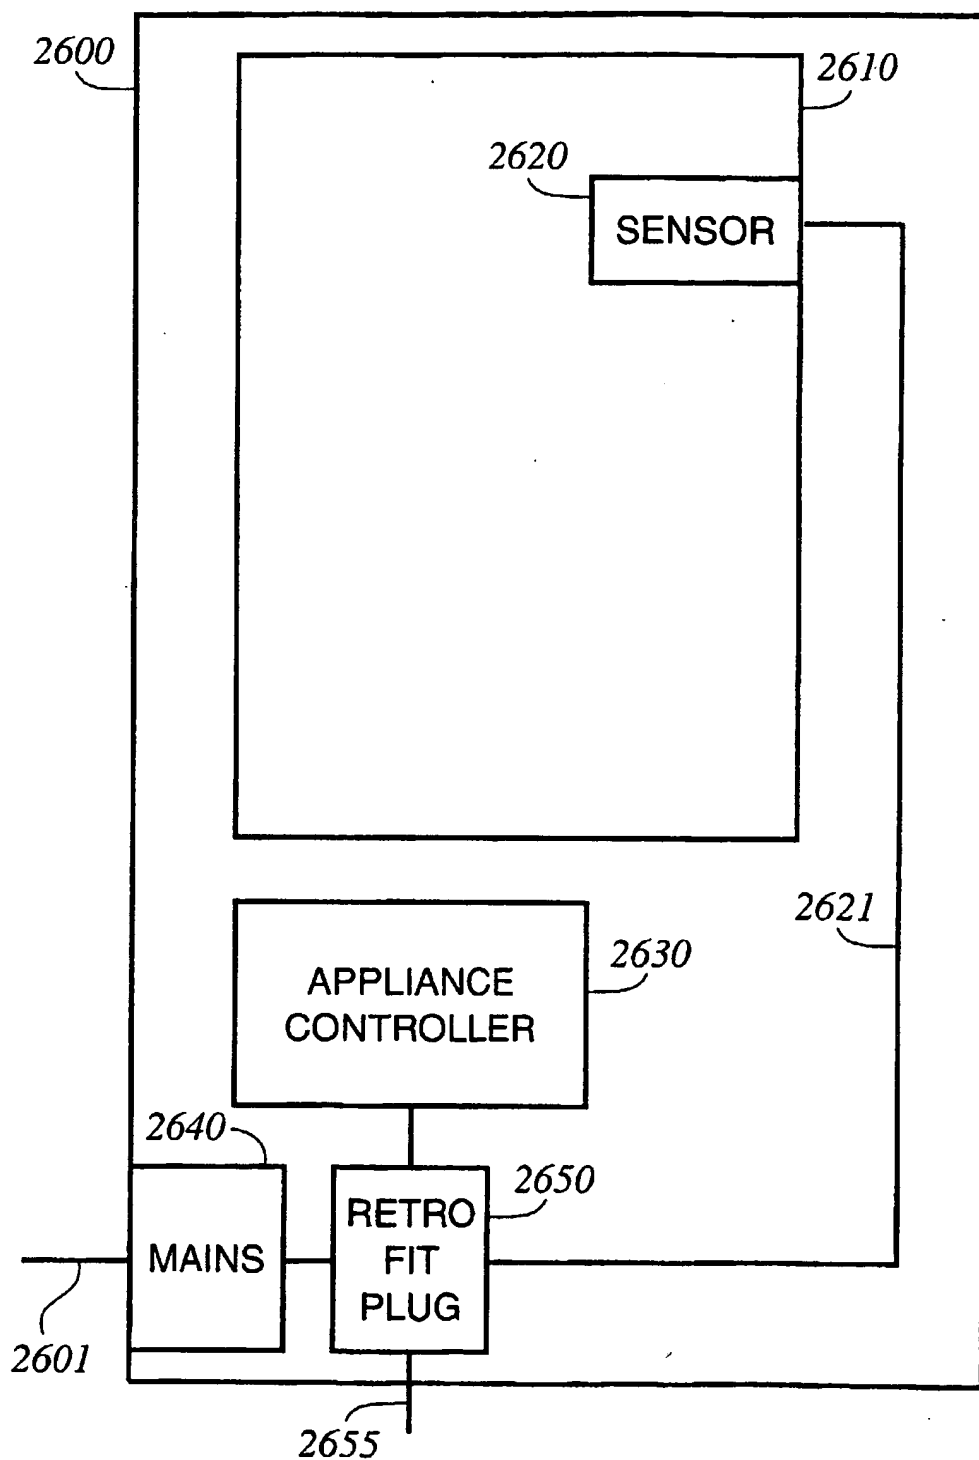
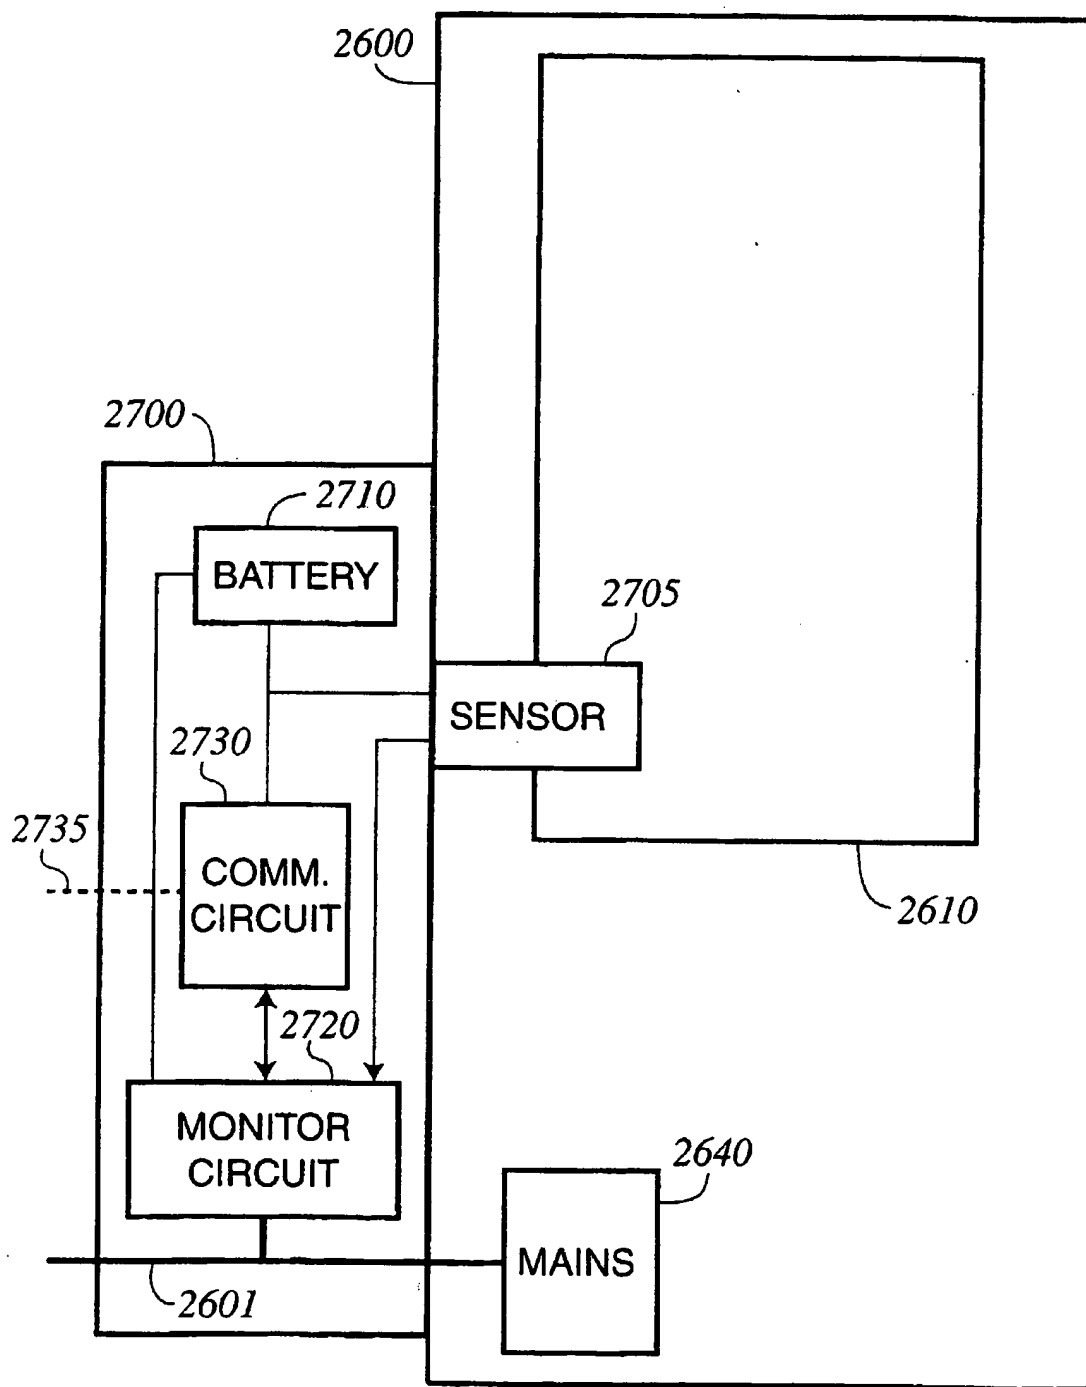
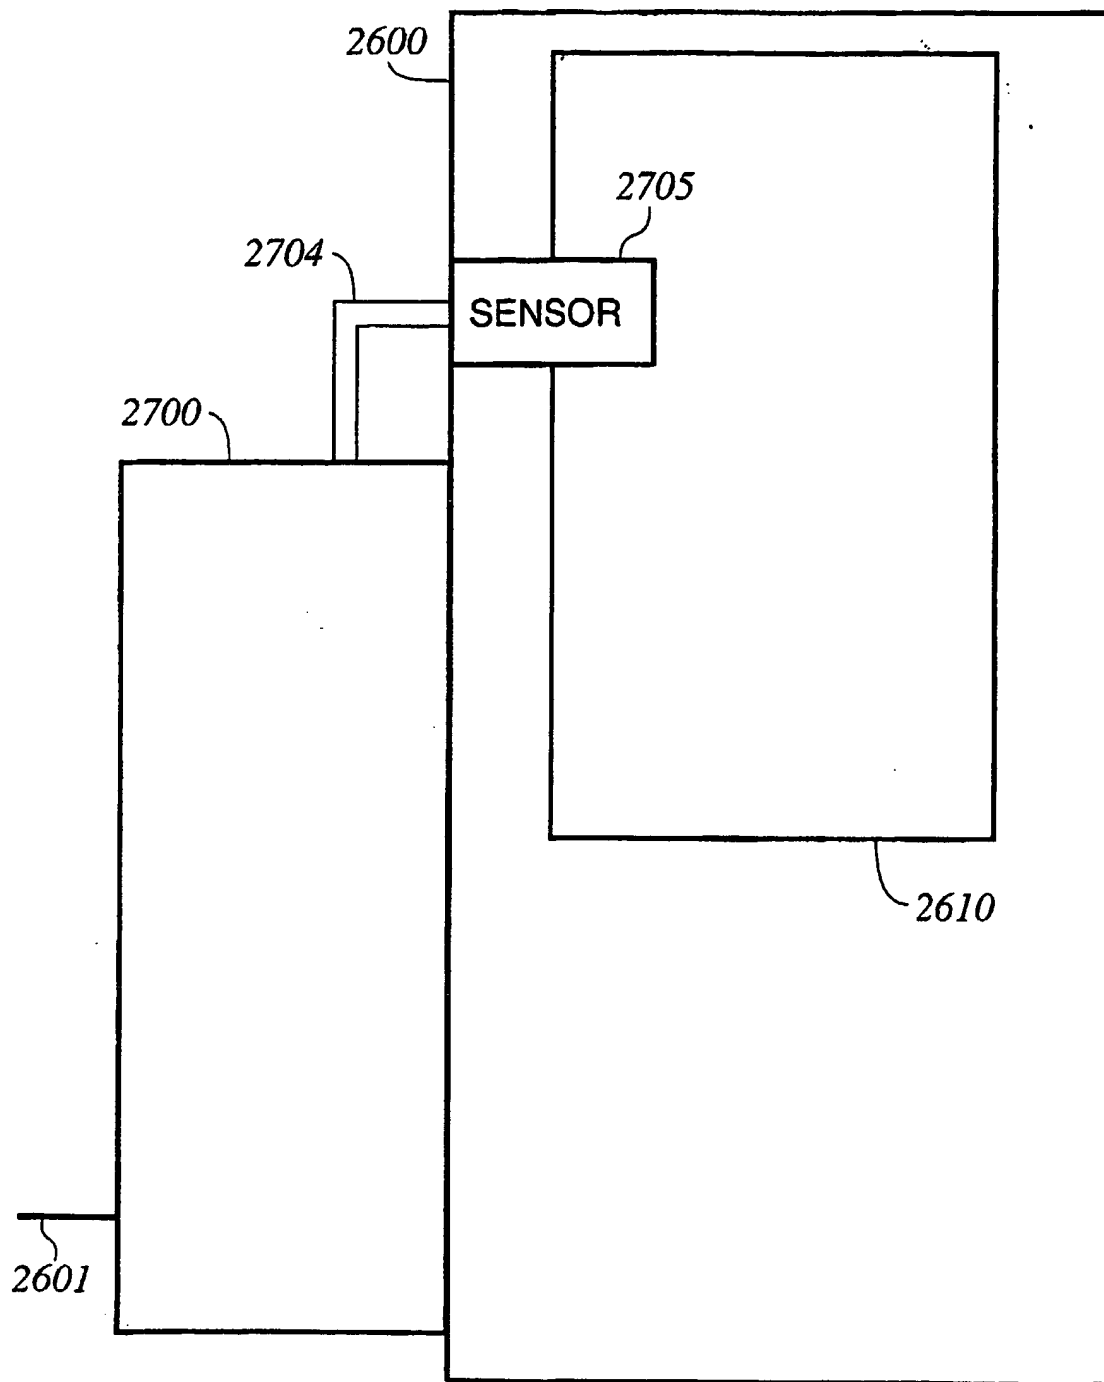


FIG. 26b

SUBSTITUTE SHEET (RULE 26)

**FIG. 27a**



**FIG. 27b**

## INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 01/00428

A. CLASSIFICATION OF SUBJECT MATTER  
IPC 7 H04L12/28

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)  
IPC 7 H04L H04B H02J G05D F24F F25D H04N

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ, INSPEC

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	DE 196 54 837 A (WITTE FRANK ; FECHNER JOCHEN (DE); MAETZEL STEPHAN (DE)) 25 June 1998 (1998-06-25) column 1, line 3 - line 20 column 2, line 5 - line 11 column 3, line 59 - column 4, line 3 column 5, line 14 - line 37 column 7, line 36 - line 49 column 9, line 50 - column 10, line 51 figures 1,2	1-36
X	EP 0 814 393 A (TELIA AB) 29 December 1997 (1997-12-29) column 1, line 49 - line 55 column 2, line 43 - line 45 column 2, line 54 - line 56 column 3, line 15 - line 25 figure 1	1-36
	--- -/-	



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

## \* Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- "&" document member of the same patent family

Date of the actual completion of the international search

3 December 2001

Date of mailing of the international search report

14.12.01

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Tous Fajardo, J

## INTERNATIONAL SEARCH REPORT

 International Application No  
 PCT/US 01/00428

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 96 07289 A (SESYS AB ;BOEHMER BERNT (SE); MAANSSON ERIK (SE); SUNDIN TOMMY (SE) 7 March 1996 (1996-03-07) page 6, line 34 -page 7, line 8 page 7, line 26 - line 37 figure 1	1-36
X	US 5 711 480 A (HASSELMARK EARL D ET AL) 27 January 1998 (1998-01-27)  column 1, line 4 - line 10 column 2, line 5 - line 6 column 2, line 36 - line 40 column 2, line 64 -column 4, line 2	37-39, 41, 44-56, 61, 65-71, 73,76-78
Y		40,42, 57-60, 62-64, 72,74
X	US 5 348 078 A (DUSHANE STEVEN D ET AL) 20 September 1994 (1994-09-20)  column 2, line 39 - line 50 column 2, line 65 -column 3, line 10 column 6, line 43 - line 49 column 8, line 29 - line 60	37-39, 41,43, 44,49, 53-56, 69-71, 73,75
Y	US 4 969 508 A (TATE BILLY G ET AL) 13 November 1990 (1990-11-13) column 1, line 6 - line 17 column 2, line 8 - line 11 column 3, line 48 -column 4, line 11	62-64
Y	GB 2 283 817 A (ALFORD ROBERT ;ALFORD ANTHONY (GB)) 17 May 1995 (1995-05-17) page 11, line 1 - line 9	40,57,72
Y	GB 2 315 573 A (BRITISH GAS PLC) 4 February 1998 (1998-02-04) page 1, line 10 -page 2, line 5 page 4, line 17 -page 5, line 8 page 5, line 22 - line 23 page 7, line 3 - line 7 page 10, line 4 - line 20	42, 58-60,74
	---	
	-/--	

Form PCT/ISA/210 (continuation of second sheet) (July 1992)



## INTERNATIONAL SEARCH REPORT

I. International Application No

PCT/US 01/00428

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5 421 247 A (SHIM JAE E) 6 June 1995 (1995-06-06)  abstract column 2, line 38 - line 50 column 3, line 66 -column 4, line 63 column 5, line 6 - line 8 column 5, line 16 - line 28 column 5, line 59 -column 6, line 10	79-81, 85,86, 88,89, 93,94, 96-98, 102,103, 105
Y		82-84, 87, 90-92, 95, 99-101, 104
X	--- DE 39 23 509 A (DIEHL GMBH & CO) 24 January 1991 (1991-01-24) column 1, line 3 - line 11 column 1, line 22 - line 49 column 2, line 2 - line 12 column 2, line 22 - line 36 column 3, line 28 - line 36 column 3, line 50 - line 62 column 4, line 40 - line 44	105-108
Y		82-84, 87, 90-92, 95, 99-101, 104
A	--- US 4 843 833 A (POLKINGHORNE JOHN) 4 July 1989 (1989-07-04) abstract	79-108
X	--- EP 0 369 382 A (SONY CORP) 23 May 1990 (1990-05-23)  column 1, line 52 -column 2, line 48 column 4, line 33 - line 41 column 5, line 3 - line 44 column 6, line 30 - line 33 column 7, line 49 -column 9, line 13	109, 111-117, 123-125
Y		118-122, 126-129
	--- -/--	

Form PCT/ISA/210 (continuation of second sheet) (July 1992)

## INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 01/00428

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5 929 749 A (PAPERNO EUGENE ET AL) 27 July 1999 (1999-07-27) column 1, line 37 - line 57 column 3, line 22 - line 37 column 3, line 47 - line 60 column 4, line 46 - line 60 column 5, line 7 - line 11 column 5, line 60 -column 6, line 62	109-112
Y	-----	126-128
Y	EP 0 626 635 A (FIRSTPERSON INC) 30 November 1994 (1994-11-30) abstract column 3, line 54 -column 5, line 4 column 11, line 22 - line 36 -----	118-122, 126-129

Form PCT/ISA/210 (continuation of second sheet) (July 1992)

# INTERNATIONAL SEARCH REPORT

International application No.  
PCT/US 01/00428

## Box I Observations where certain claims were found unsearchable (Continuation of Item 1 of first sheet)

This International Search Report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☐ Claims Nos.:  
because they relate to subject matter not required to be searched by this Authority, namely:
2. ☐ Claims Nos.:  
because they relate to parts of the International Application that do not comply with the prescribed requirements to such an extent that no meaningful International Search can be carried out, specifically:
3. ☐ Claims Nos.:  
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

## Box II Observations where unity of invention is lacking (Continuation of Item 2 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

see additional sheet

1. ☒ As all required additional search fees were timely paid by the applicant, this International Search Report covers all searchable claims.
2. ☐ As all searchable claims could be searched without effort justifying an additional fee, this Authority did not invite payment of any additional fee.
3. ☐ As only some of the required additional search fees were timely paid by the applicant, this International Search Report covers only those claims for which fees were paid, specifically claims Nos.:
4. ☐ No required additional search fees were timely paid by the applicant. Consequently, this International Search Report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

Remark on Protest

- ☐ The additional search fees were accompanied by the applicant's protest.
- ☒ No protest accompanied the payment of additional search fees.

FURTHER INFORMATION CONTINUED FROM PCT/ISA/ 210

This International Searching Authority found multiple (groups of) inventions in this international application, as follows:

1. Claims: 1-36

Retrofit plug with a radio frequency transmitter

2. Claims: 37-78

Damper with a controller which regulates the air flow

3. Claims: 79-108

Refrigeration appliance with a sensor in a compartment

4. Claims: 109-129

Building control system

## INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 01/00428

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
DE 19654837	A	25-06-1998	DE 19654837 A1	25-06-1998
EP 0814393	A	29-12-1997	EP 0814393 A1	29-12-1997
			NO 972653 A	22-12-1997
			SE 9602505 A	21-12-1997
WO 9607289	A	07-03-1996	AU 3402795 A	22-03-1996
			SE 9402870 A	01-03-1996
			WO 9607289 A1	07-03-1996
US 5711480	A	27-01-1998	NONE	
US 5348078	A	20-09-1994	AU 7325294 A	06-02-1995
			WO 9502156 A1	19-01-1995
			US 5449319 A	12-09-1995
			US 6213404 B1	10-04-2001
US 4969508	A	13-11-1990	NONE	
GB 2283817	A	17-05-1995	NONE	
GB 2315573	A	04-02-1998	GB 2315572 A ,B	04-02-1998
			CA 2124053 A1	25-11-1994
			EP 0635812 A1	25-01-1995
			GB 2278463 A ,B	30-11-1994
			US 5595342 A	21-01-1997
US 5421247	A	06-06-1995	JP 2580486 B2	12-02-1997
			JP 7004814 A	10-01-1995
			KR 125753 B1	01-04-1998
DE 3923509	A	24-01-1991	DE 3923509 A1	24-01-1991
US 4843833	A	04-07-1989	CA 1228139 A1	13-10-1987
			EP 0174365 A1	19-03-1986
			WO 8503995 A1	12-09-1985
			US 4879878 A	14-11-1989
EP 0369382	A	23-05-1990	JP 2789677 B2	20-08-1998
			JP 3010596 A	18-01-1991
			JP 2132997 A	22-05-1990
			JP 2773163 B2	09-07-1998
			CA 2002718 A1	14-05-1990
			DE 68925565 D1	14-03-1996
			DE 68925565 T2	05-06-1996
			EP 0369382 A2	23-05-1990
			US 4989081 A	29-01-1991
			KR 170362 B1	30-03-1999
US 5929749	A	27-07-1999	NONE	
EP 0626635	A	30-11-1994	EP 0626635 A2	30-11-1994
			JP 7098640 A	11-04-1995
			US 5524195 A	04-06-1996
			US 6154209 A	28-11-2000
			US 6160551 A	12-12-2000
			US 5745710 A	28-04-1998
			US 6020881 A	01-02-2000

# INTERNATIONAL SEARCH REPORT

Information on patent family members

Application No

PCT/US 01/00428

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 0626635 A		US 5886697 A	23-03-1999
		US 5995106 A	30-11-1999

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☒ FADED TEXT OR DRAWING
- ☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**